

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
25 November 2004 (25.11.2004)

PCT

(10) International Publication Number  
**WO 2004/102570 A2**

(51) International Patent Classification<sup>7</sup>: **G11B 27/30**,  
27/10, 27/034

(21) International Application Number:  
PCT/JP2004/006794

(22) International Filing Date: 13 May 2004 (13.05.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
2003-135060 13 May 2003 (13.05.2003) JP

(71) Applicant (for all designated States except US):  
**KABUSHIKI KAISHA TOSHIBA** [JP/JP]; 1-1, Shibaura  
1-chome, Minato-ku, Tokyo 1058001 (JP).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **TAIRA, Kazuhiko**  
[JP/JP]. **ANDO, Hideo** [JP/JP]. **MIMURA, Hideki**  
[JP/JP]. **ICHIKAWA, Teiichi** [JP/JP]. **TSUMAGARI,**  
**Yasufumi** [JP/JP]. **YAMAGATA, Yoichiro** [JP/JP].  
**TAGA, Yumiko** [JP/JP]. **OHTA, Minoru** [JP/JP].

(74) Agents: **SUZUYE, Takehiko** et al.; c/o Suzuye & Suzuye,  
7-2, Kasumigaseki 3-chome, Chiyoda-ku, Tokyo 1000013  
(JP).

(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,  
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG,  
KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG,  
MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH,  
PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN,  
TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,  
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,  
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,  
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,  
SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,  
GW, ML, MR, NE, SN, TD, TG).

**Published:**

— with declaration under Article 17(2)(a); without abstract;  
title not checked by the International Searching Authority

For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.

(54) Title: INFORMATION STORAGE MEDIUM, INFORMATION REPRODUCTION DEVICE, INFORMATION  
REPRODUCTION METHOD

(57) Abstract:



**WO 2004/102570 A2**

## D E S C R I P T I O N

INFORMATION STORAGE MEDIUM,  
INFORMATION REPRODUCTION DEVICE,  
INFORMATION REPRODUCTION METHOD

## Technical Field

The present invention relates to an information storage medium (or an information recording medium), an information reproduction device, and an information reproduction method.

## Background Art

As such an information storage medium, there has been an optical disk called a digital versatile disk (DVD) capable of reproducing digital information using a focused light. Standards of the current DVD include read-only DVD-ROM standards, write-once DVD-R standards, rewritable-type (about 10000 times) DVD-RW, and rewritable-type (10000 times or more) DVD-RAM standards. Any standards have format standards which define a data structure recorded on an optical disk (information storage medium) of video information (video data, sub-picture data, and audio data, generically referred to as video objects) itself, and a data structure of management data for managing video information.

The read-only current DVD video standards simultaneously deal with a large number of languages, and multi-scene representation is possible such as

multi-angle and multi-story. Additionally, there are varieties of menu screens, it is easy for users to directly access desired scenes, and the standards have formats capable of providing video content which is easily used by the users (see U.S. Pat. No. 5,636,200, and Japanese Patent No. 2,677,775, for example).

As described above, the read-only current DVD video standards have the formats capable of the video content easily usable by the users, but there has been a demand for improvements of the standards in order that the users may further easily use the content and content representing power may be further enriched for the users.

Moreover, there is a problem that authoring (preparation and edition of programs to be recorded in the DVD video disk) is complicated in order to provide the content easy to use by the users.

Parts of the current DVD video standards lacking in content representing power for the users, and parts difficult for the users to use or parts which are complicated in the authoring for providing the content easy to use by the users will be specifically listed.

[1] Difficult for the user to use.  
Alternatively, the authoring has been complicated in order to prepare the content easy to use by the users.

(A) Disadvantages with respect to a reproduction start position at a time when reproduction of a title

is interrupted halfway to perform another processing,  
and the reproduction of the title is restarted.

(A1) The reproduction of video is interrupted,  
display is switched to menu or another video, and the  
5 reproduction cannot be restarted from the interrupted  
position.

The reproduction of a specific video title is  
interrupted halfway during the reproduction to switch  
to the menu screen, bonus content is then reproduced  
10 halfway or to the end, and afterwards the video title  
interrupted halfway is to be reproduced. However, the  
content prepared by conventional DVD video standards  
cannot be reproduced only from a start position of the  
video title in many cases. This is because resume  
15 information (reproduction interrupted position  
information) of the previous specific video title is  
rewritten into position information of the bonus  
content in a stage in which the reproduction of the  
bonus content is started. A complicated authoring  
20 process is required in order to obtain the content such  
that the reproduction can be started from the  
interrupted position of the previous video title after  
the bonus content is reproduced halfway or to the end.

(A2) The reproduction cannot be started from a  
25 good place to start, when a game is to be resumed after  
the interruption of the reproduction in the game or the  
like.

In case of the "game" (e.g., role playing game) instead of the above-described video as the specific title, there is a request from a content provider that the game is to be started from an end of a chapter of the game, not from an interrupted position in a case where the game is resumed after returning to the menu screen. However, this request cannot be satisfied with the current DVD video standards.

(B) There is a portion difficult to use concerning language setting for display.

(B1) A menu description language code cannot be changed with a command which can be designated in the content, and the authoring is complicated.

In the current DVD video standards, the menu description language code M\_LCD is set into SPRM(0) (0-th system parameter: 16 bits) of navigation data, and the value is stored in the memory of the information reproduction device. In the current DVD video standards, a command for changing the value of SPRM(0) does not exist in a command list which can be set in the content, and it is possible to change the value of SPRM(0) only by user designation under a special condition. Specifically, the value of SPRM(0) can be changed using a user operation function called Menu\_Language\_Select () in user functions arranged in the information reproduction device, but there is a restriction that the user operation called

Menu\_Language\_Select () can be set only during the  
stopping of the operation of the information  
reproduction device. A screen for exclusive use is  
displayed to set the user operation using a remote  
5 controller.

The value of SPRM(0) cannot be changed with the  
command which can be set in the content in this manner.  
Therefore, a screen for selecting the menu description  
language code needs to be prepared with respect to a  
10 plurality of menu description language codes in the  
content (especially VOB data on menu information) so  
that any setting of the value of SPRM(0) can be  
handled. The authoring operation at the time of  
preparation of the content has been very difficult.

15 (B2) There is a danger that menu description  
language code information set by the user is deleted.

For example, supposing that a command capable of  
changing the value of SPRM(0) is newly added in order  
to solve problem (B1). Then, even when the user  
20 carefully sets a specific menu description language  
code (e.g., set Japanese to SPRM(0)), there is a danger  
that the value of SPRM(0) is automatically changed by  
the reproduction of the content. When the menu  
description language code is automatically changed by  
25 the command, the user feels dissatisfied.  
Additionally, a necessity to set the menu description  
language code again by the user is generated, and this

causes a problem that burdens on the user increase.

[2] There is a place where a content representing power for the user is lacking.

(C) Disadvantage concerning seamless reproduction  
5 with respect to a still picture

(C1) A seamless reproduction between a moving picture and still picture is not possible with the current DVD video content.

The current DVD video assures the seamless  
10 reproduction of the moving picture (Movie Content), and connection/reproduction is seamlessly possible between different VOBs (or different titles) (without interrupting the screen of the moving picture halfway). On the other hand, for example, when the still picture  
15 displayed in a slide show (one display method with respect to the still picture, in which the displayed still picture is automatically switched) is switched to the moving picture, the seamless reproduction is not assured, and video or audio stands still halfway  
20 depending on the information reproduction device in some case. Reasons why the seamless connection is not assured at a time of the switching to the moving picture from the still picture with the current DVD video content are as follows.

25 i) In an extended system target decoder (E-STD) in which the seamless reproduction is assured, an access unit is defined in a moving picture object, and

the values of a system time clock (STC: a clock value forming a standard) set to a separation unit, video decoder unit, sub-picture decoder unit, and audio decoder unit are switched in a boundary position of the access unit. On the other hand, the access unit cannot be defined with respect to the still picture in the current DVD.

That is, a picture continues to be output constantly continuously by a field unit of the moving picture, whereas the picture is only intermittently output in the still picture displayed, for example, in the slide show. In a data structure in a still picture object, a sequence end code (sequence\_end\_code) is arranged immediately after an I picture (intra picture) constituting a still picture in accordance with standards of moving picture experts group 2 (MPEG2). In the video decoder unit, when this sequence end code is detected, the decoding is stopped until the next I picture is input. Therefore, in the conventional DVD video, the access unit such as the moving picture cannot be set in a timing period in which the still picture is intermittently output.

ii) Switching between common parities has been permitted as a switching timing between the still pictures in the conventional DVD video. That is, after the previous still picture ends in a top field (or a bottom field), the next still picture is permitted to



be started from the top field (or the bottom field).  
Therefore, when the still picture is switched to the  
moving picture halfway in a frame, the seamless  
connection is not performed, and there is a danger that  
5 the screen is disturbed at a switching end.

(C2) Multi-angle reproduction in which the still  
pictures are combined or multi-angle reproduction  
between the moving picture and still picture cannot be  
performed.

10 In the current DVD video, it is difficult to  
perform the multi-angle reproduction in which slide  
shows of still pictures (still picture content) are  
combined or the multi-angle reproduction in which the  
slide show of the still pictures is combined with the  
15 moving picture. When multi-angle reproduction handling  
content is forcibly prepared, the seamless reproduction  
is not assured with respect to the still picture.  
Therefore, multi-angled still pictures cannot be  
continuously reproduced (the still picture is stopped  
20 halfway without being continuously switched), or the  
screen stops halfway without being smoothly switched at  
the switching end between a screen of multi-scene and  
that of one sequential scene. In the moving picture,  
an interleaved unit (ILVU) is defined in which  
25 scattered arrangement is performed for each angle in an  
interleaved block, whereas the definition of the ILVU  
with respect to the still picture is not clarified in

the current DVD video. A period until the switching of the screen is long in the still picture (the same still picture continues to be reproduced for a long time), and therefore there has not been a mechanism capable of displaying the corresponding still picture immediately after angle switching at present. Furthermore, as described in (C1), on detecting the sequence end code arranged immediately after the I picture corresponding to the still picture, a decode process of the video decoder unit is temporarily stopped until the next I picture comes. Therefore, the arrangement of the sequence end code is prohibited in video data in a cell constituting the interleaved block in the current DVD video standards.

(D) The seamless reproduction is not assured in VOB where the command by a cell unit is included.

In the DVD video of the current standard definition (SD), it is possible to designate the command by the cell unit in a program chain (PGC).

This command information is recorded in a cell command region in program chain information (PGCI) which is a region where management information of the PGC is recorded. The cell command is executed at the time of the ending of the reproduction of the cell in which this cell command is set. Therefore, the reproduction of the next cell can be temporarily interrupted. Therefore, the seamless reproduction between the cells

is not assured at the playback time of VOB including the cell command in the current SD DVD video.

(E) Disadvantage on highlight information

(E1) There is a deviation of a display period  
5 (set period) between highlight information and sub-picture.

A menu of the highlight information is displayed at the playback time of a video title image, and content can be prepared in such a manner that the user  
10 can perform an interactive operation. In this case, it is necessary to switch the highlight information or to change the content of the highlight information in accordance with the content of the video title image being reproduced, and therefore precision of a display  
15 period or executable period of the highlight information is important. In the DVD video content of the conventional SD, a button displayed in the screen comprises a combination of two types of different streams of a sub-picture stream presenting the image of  
20 the button and a video stream including the highlight information required for executing the command designated by the button.

The effective executable period of the highlight information is determined by time information of start  
25 and end (PTM: presentation time), and completely coincides with a display period of the sub-picture for use mainly in subtitles. There is a problem that menu

selection ends, when the sub-picture ends. Therefore, when a content maker is to prepare the content of the subtitles simultaneously combined with the menu, there are restrictions as to the preparation of the content.

5 For example, the user has to select the menu within an effective (display) period of the sub-picture. The content maker cannot prepare the content as imaged, a degree of freedom is limited, and the content supplied to the user are forced to be limited.

10 (E2) A selection item image of the menu is not multicolored.

Since only a combination of 16 colors can be represented in the current SD DVD video content, a degree of appeal to the user is low, and multicolored

15 representation cannot be performed.

(E3) A designated region of the highlight information cannot be set to a shape other than a rectangular shape.

The shape other than the rectangular shape cannot

20 be set as the designated region of the highlight information in the DVD video content of the current SD, and it has not been possible to prepare the content having varieties of highlight information such as a triangular shape and a star shape.

25 (E4) The same button cannot be set with respect to a plurality of regions distant from one another on the screen.

The same button can be set only in an integrated region in the DVD video content of the current SD.

On the other hand, it is easy to link the same URL to a plurality of regions in the screen of PC or a homepage screen of internet, and the current SD DVD video content has been inferior to the PC screen or the homepage screen of internet.

(F) There is a problem that a background music discontinues at the switching time of the menu screen.

In the current SD DVD video content, audio information (background music) at a menu screen display time is attached to each menu. Therefore, every time the menu screen changes, the audio information accordingly changes.

The DVD video content of the current SD cannot satisfy a content provider's request that the background music is to be reproduced continuously without being interrupted, even when the menu is switched.

In the above-described conventional art, when sub-picture information of two bits/one pixel representation (four colors) is used as subtitle or menu information with respect to a high-quality content of a high-definition TV system, there is a limitation on a representing capability, and there has been a demand for a representing capability of 16 or more colors from a content maker.

Moreover, highlight information for use in a selection menu is formed using a part of a sub-picture function. Therefore, for example, when subtitles are prepared using the sub-picture information, there are  
5 restrictions that selection of the selection menu has to be decided at a display end time of the subtitles, and there has been a problem that a degree of freedom of the content maker is restrained.

#### Disclosure of Invention

10 According to an embodiment of the present invention, a representing power of read-only DVD video content to a user is enhanced, and it is possible to prepare content easy to use by the user by comparatively easy authoring. As a result, there can  
15 be provided a data structure based on format standards capable of enhancing an appeal of a DVD video to the user, an information storage medium in which the data structure is recorded, and an information reproduction device capable of reproducing the information storage  
20 medium.

According to an embodiment of the invention, an information storage medium stores a graphic unit capable of being superimposed upon a main picture and output/displayed.

25 According to an embodiment of the invention, an information reproduction device comprises:

means for reproducing a graphic unit capable of

being superimposed upon a main picture and  
output/displayed from an information storage medium;  
and

means for separating sub-picture information from  
5 the reproduced graphic unit.

According to an embodiment of the invention,  
an information reproduction method comprises:

reproducing a graphic unit capable of being  
superimposed upon a main picture and output/displayed  
10 from an information storage medium; and

reproducing highlight information from the  
reproduced graphic unit.

#### Brief Description of Drawings

FIGS. 1A, 1B, 1C, 1D, 1E, and 1F show contents of  
15 information recorded in a disc-shaped information  
storage medium 1 in an embodiment of the present  
invention;

FIG. 2 is a diagram showing a file system of  
a conventional SD DVD video content;

20 FIG. 3 is a diagram showing a data structure in  
an HD video manager information region (HDVMGI) 31  
shown in FIG. 1E;

FIG. 4 is a diagram showing a data structure in  
an HD video manager information management table  
25 (HDVMGI\_MAT) 310 of FIG. 3;

FIG. 5 is a diagram showing a data structure in  
a title search pointer table (TT\_SRPT) 311 shown in

FIG. 3;

FIG. 6 is a diagram showing a data structure in an HD video manager menu PGCI unit table (HDVMGM\_PGCI\_UT) 312 shown in FIG. 3;

5        FIG. 7 is a diagram showing a data structure in an HD video manager menu language unit #n (HDVMGM\_LU #n) 312c (FIG. 6) recorded in the HD video manager menu PGCI (HDVMGM\_PGCI\_UT) 312 shown in FIG. 3;

10        FIG. 8 is a diagram showing a data structure in an HD video manager menu program chain category (HDVMGM\_PGC\_CAT) recorded in the HD video manager menu/language unit #n (HDVMGM\_LU #n) 312c (FIG. 6) shown in FIG. 7;

15        FIG. 9 is a diagram showing a data structure in a parental management information table (PTL\_MAIT) 313 shown in FIG. 3;

FIG. 10 is a diagram showing a data structure in parental management information (PTL\_MAI) 313c shown in FIG. 8;

20        FIG. 11 is a diagram showing a data structure in an HD video title set attribute information table (HDVTS\_ATRT) 314 shown in FIG. 3;

FIG. 12 is a diagram showing a data structure in a text data manager (TXTDT\_MG) 315 shown in FIG. 3;

25        FIG. 13 is a diagram showing a data structure in a text data language unit (TXTDT\_LU) 315c in the text data manager (TXTDT\_MG) 315 shown in FIG. 12;



FIG. 14 is a diagram showing a data structure in text data (TXTDT) 315c4 in the text data language unit (TXTDT\_LU) 315c shown in FIG. 13;

5 FIG. 15 is a diagram showing a data structure in an HD video manager menu cell address table (HDVMGM\_C\_ADT) 316 shown in FIG. 3;

FIG. 16 is a diagram showing a data structure in an HD video manager menu video object unit address map (HDVMGM\_VOBU\_ADMAP) 317 shown in FIG. 3;

10 FIG. 17 is a diagram showing contents of management information with respect to AOB for HD video content menu (HDMENU\_AOB);

FIG. 18 is a diagram showing a data structure in a HD menu video object region (HDVMGM\_VOBS) 32 shown in FIG. 1E integrated and stored in an HD\_VMG01.HDV file of FIG. 2;

FIG. 19 is a diagram showing a data structure in an audio object region (HDMENU\_AOBS) for HD menu;

20 FIG. 20 is a diagram showing a data structure in an HD video title set information region (HDVTSI) 41 shown in FIGS. 1F;

FIG. 21 is a diagram showing a data structure in an HD video title set information management table (HDVTSI\_MAT) 410;

25 FIG. 22 is a diagram showing a data structure in an HD video title set PTT search pointer table (HDVTS\_PPT\_SRPT) 411 shown in FIG. 20;

FIG. 23 is a diagram showing a data structure in an HD video title set program chain information table (HDVTS\_PGCIT) 412 shown in FIG. 20;

5       FIG. 24 is a diagram showing a data structure in the HD video title set program chain category (HDVTS\_PGC\_CAT) recorded in HDVTS\_PGCI search pointer (HDVTS\_PGCI\_SPR) shown in FIG. 23;

10       FIG. 25 is a diagram showing a data structure in an HD video title set menu/PGCI/unit table (HDVTSM\_PGCI\_UT) 413 shown in FIG. 20;

FIG. 26 is a diagram showing a data structure in an HD video title set menu/language unit (HDVTSM\_LU) 413c shown in FIG. 25;

15       FIG. 27 is a diagram showing a data structure in the HDVTSM\_PGC category information (HDVTSM\_PGC\_CAT) shown in FIG. 26;

FIG. 28 is a diagram showing a data structure in an HD video title set time map table (HDVTS\_TMAPT) 414 shown in FIG. 20;

20       FIG. 29 is a diagram showing a data structure in an HD video title set menu cell address table (HDVTSM\_C\_ADT) 415 shown in FIG. 20;

25       FIG. 30 is a diagram showing a data structure in an HD video title set menu video object unit address map (HDVTSM\_VOBU\_ADMAP) 416 shown in FIG. 20;

FIG. 31 is a diagram showing a data structure in an HD video title set cell address table (HDVTS\_C\_ADT)

417 shown in FIG. 20;

FIG. 32 is a diagram showing a data structure in the HD video title set/cell/address table (HDVTS\_C\_ADT) 417 shown in FIG. 20;

5 FIG. 33 is a diagram showing a data structure in program chain information PGCI;

FIG. 34 is a diagram showing a data structure in program chain/general information PGCI\_GI in program chain information PGCI;

10 FIG. 35 is a diagram showing a data structure in a program chain/command table PGCI\_CMDT in program chain information PGCI shown in FIG. 34;

FIG. 36 is a diagram showing a data structure in program chain/command table information PGC\_CMDTI and 15 resume command RSM\_CMD in the program chain/command table PGCI\_CMDT shown in FIG. 35;

FIG. 37 is a diagram showing a data structure in program chain/program map (PGC\_PGMAP) and cell/position information table (C\_POSIT) 54 arranged in the program 20 chain information PGCI;

FIG. 38 is a diagram showing a data structure in a cell/Playback information table C\_PBIT arranged in the program chain information PGCI;

FIGS. 39A, 39B, 39C, and 39D are diagrams showing 25 a structure in which a graphic unit GU is stored as an MPEG program stream;

FIG. 40 is a diagram showing a stream ID and

a sub-stream ID allocated to each stream of the graphic unit GU;

FIG. 41 is a diagram showing one example of a data structure of the graphic unit GU having mask data;

5        FIG. 42 is a diagram showing another example of the data structure of the graphic unit having the mask data of FIG. 41;

FIGS. 43A and 43B are diagrams showing contents of header information b1 and general information b21;

10        FIG. 44 is a diagram showing data stored in the graphic unit;

FIG. 45 is a diagram showing an example of video synthesis including a mask pattern;

15        FIG. 46 is a diagram showing an example of a color/contrast information table stored in color palette information b22;

FIG. 47 is a diagram showing bit definition of mask data b3 of one bit/one pixel stored in the graphic unit GU;

20        FIG. 48 is a diagram showing an information reproduction device (player) which reads and reproduces information stored in a disc-shaped information storage medium 1;

25        FIG. 49 is a diagram showing model example "A" of a coder block in a video system of and after a separation unit 103 of FIG. 48;

FIG. 50 is a diagram showing model example B of

the coder block in the video system of and after the separation unit 103 of FIG. 48;

FIG. 51 is a diagram showing model example C of the coder block in the video system of and after the separation unit 103 of FIG. 48;

FIG. 52 is a diagram showing another example having button position information in the data structure of the graphic unit GU shown in FIGS. 41 and 42;

FIG. 53 is a diagram showing an example of video synthesis including the graphic unit having the button position information shown in FIG. 52;

FIG. 54 is a diagram showing an example of video synthesis further including sub-picture data in the video synthesis shown in FIG. 45; and

FIG. 55 is a flowchart of video synthesis associated with a video decoder including a graphic decoder.

#### Best Mode for Carrying Out the Invention

An embodiment of the present invention will be described hereinafter with reference to the drawings. First, whole subject matters of the present invention will be surveyed, and a relation between the subject matters will be described. Next, points concerning "resume information control" which is a main subject matter noted in the present specification will be described, and then specific embodiments will be

described.

In the present specification, video data, sub-picture data, audio data, and graphic data are generically referred to as a video object, and the video object and video object management information are generically referred to as contents. To clarify differences, conventional DVD video content will be referred to as standard definition (SD) content, and content which is an object of an embodiment of the present invention having the following subject matter (A) to (F) will be referred to as high definition (HD) content.

<Description of Whole Subject matters>

[1] A problem that the content is difficult to use by a user or that authoring is complicated in preparing the content easy to use by the user is solved.

(A) Interrupted Position Information Control Method at Title Interruption Time  
[Point 1]

Storage/discharge rules in resume information are changed with respect to the current DVD video standards, and rewrite/change prohibition/discard process of contents of resume information recorded in a memory 122 of an information reproduction device shown in FIG. 48 are finely controllable.

[Point 2]

When the resume information to be recorded in the

memory 122 of the information reproduction device is rewritten, the information is held until a control instruction comes with respect to the next resume information. For example, in conventional DVD video standards, there has been a rule of deletion of contents of the resume information in a case where a JumpTT, JumpVTS\_TT, or JumpVTS\_PTT command is executed. This is changed in the present invention. Even after the above-described command is executed, the contents of the resume information are held, and a part of the problem described in (A1) is solved.

[Point 3]

As measures against the problem shown in (A1), as shown in FIG. 24, with respect to each PGC, a resume (RSM: reproduction resume) command (command by selection on a screen), or a resume permission flag (=RSM permission flag) indicating whether or not the reproduction resume by a resume () function (command performed by the reproduction device) executed, for example, in accordance with user designation is permitted is newly set. As a specific content, at the time of execution of a CallSS command described later, the content of the resume information is updated, when the RSM permission flag is set to "0b". When the flag is set to "1b", the update is prohibited.

For example, when the resume information is prohibited from being updated with respect to the PGC

including bonus content in an example described in (A1), the resume information with respect to a specific video title interrupted before is held as the resume information recorded in the memory 122 of the information reproduction device (details will be described later in detail).

[Point 4]

As the measures against the problem described in (A2), as shown in FIG. 35, a program chain command table (PGC\_CMDT) 51 is newly set in program chain information PGCI, and resume sequence information is recorded. The resume sequence information described in the program chain command table (PGC\_CMDT) 51 means a command string (continuous link order of commands) executed immediately before returning to the PGC of the corresponding title from the menu screen. When returning to the PGC corresponding to the interrupted title from the menu screen, the presence/absence of the resume sequence information is surely confirmed before starting the reproduction based on the resume information.

When there is not any resume sequence information, the reproduction from the interrupted position is started based on the resume information.

If there is the resume sequence information, the reproduction is started from a place designated by the resume sequence information.



For example, as the measures against the problem described in (A2), a command to rewrite "position information of stop of game" into the resume information is set in the resume sequence information recorded in the program chain command table (PGC\_CMDT) 51. Accordingly, immediately after returning from the menu screen, the reproduction can be started from the stop of the game (detailed contents will be described later).

10        A cell number which is information indicating a position where the reproduction has been interrupted; address information of a navigation pack arranged in a start position of a cell; PGC reproduction control situation; video title set (VTS) number; a title number 15        TTN in a title domain (the value of the title number is stored as that of SPRM(4)); a title number VTS\_TTN in VTS in the title domain (this value is stored as the value of SPRM(5)); a PGC number TT\_PGCN (SPRM(6)) of the title in the title domain; a part of title number 20        PTTN (SPRM(7)) with respect to the title of a sequential PGC; and a highlight button number HL\_BTNN (SPRM(8)) of highlight in a selected state are recorded as the resume information. Not only in a case where the menu screen is returned to PGC corresponding to the 25        interrupted title as described above, but also in cases where situations change, for example, where at least a part of the resume information changes, or highlight

position information changes in association of  
information of SPRM(8), the process is set to be surely  
executed to the end of the resume sequence information.  
[Management Information Recording Place]

5           In an arrangement place of information for  
managing the resume information, in the first  
embodiment, as shown in FIG. 24, the RSM permission  
flag (update permission flag of resume information) is  
arranged in an HDVTS\_PGC category (HDVTS\_PGC\_CAT) in an  
10 HDVTS\_PGCI search pointer 412b in an HD video title set  
program chain information table (HDVTS\_PGCIT) 412.

Moreover, in another embodiment (second  
embodiment), as shown in FIGS. 33 and 34, the RSM  
permission flag (update permission flag of the resume  
15 information) is arranged in RSM&AOB category  
(RSM&AOB\_CAT) in a program chain general information  
(PGC\_GI) 50.

Moreover, in the resume sequence information  
indicating the command string (continuous link order of  
20 the commands) executed immediately after returning to  
the PGC of the title as described in [Point 4]  
concerning the subject matter (A) which solves the  
problem of (A2), as shown in FIG. 35, RSM commands  
(RSM\_CMD) 514 are arranged as a resume (RSM) command  
25 sequence in the program chain command table (PGC\_CMDT)  
51. Number information RSM\_CMD\_Ns of the RSM commands  
(RSM\_CMD) 514 arranged in the program chain command

table (PGC\_CMDT) 51 is recorded in a program chain command table information (PGC\_CMDTI) 510 as shown in FIG. 36.

[Management Information Contents]

5           The RSM permission flag (update permission flag of the resume information) indicates whether or not the content of the resume information is updated in a stage in which the reproduction of the corresponding HDVTS\_PGC is started (the resume information is  
10           successively updated in accordance with reproduction situation of the corresponding PGC). That is, when the flag is "0b", the resume information is updated. When the flag is "1b", the resume information is not updated, and a process of holding the reproduction  
15           interrupted information of HDVTS\_PGC (corresponding program chain in the video title set of the present invention) reproduced before is performed.

          In the specific data structure in the RSM command (RSM\_CMD) 514, as shown in FIG. 36, a region "for eight  
20           bytes" is allocated to each command, and the command content is recorded in the region "for eight bytes".

(B) Language Setting for Display

[Point 1]

          To solve the problem described in (B1), a screen  
25           in which a menu description language code can be set in the content is provided. Specifically, the setting of the menu description language code is allowed to be

possible with first play PGC (FP\_PGC) which can be first displayed immediately after the insertion of the information storage medium. To deal with the content capable of setting the menu description language code in the selection on the screen by the user, FP\_PGC is  
5 set to have a video object (VOB), and this VOB is assumed to be usable only in a language selection menu. When the content supports only a language or when the content automatically takes over the value of the  
10 current menu description language code, FP\_PGC does not have the VOB for the menu screen in some case. In an example of the content which automatically takes over the value of the menu description language code, there is an embodiment in which the value of SPRM(0) owned by  
15 the information reproduction device is automatically compared with the language supported by the HD DVD video content, and the menu description language code is adapted to the value in case of agreement. In this case, the resume sequence information which is a  
20 command process sequence to be automatically compared is recorded in first play program chain information (FP\_PGCI: FIG. 4) which is management information on FP\_PGC.

Furthermore, as a restrictive condition on the  
25 FP\_PGC, a structure capable of holding one or less cell is constituted (one cell is defined when there is VOB; when the content which does not have a screen for

selecting the menu description language code do not have any VOB, any cell is not included in FP\_PGC). This FP\_PGC permits only sequential reproduction of the program, and a parental block structure or a multi-scene structure is prohibited. Furthermore, the use of only one audio stream (one or zero) is permitted as a usable stream in the FP\_PGC, further the use of sub-picture stream is prohibited, and, instead, the use of the graphic unit GU described later is introduced.

Therefore, in the embodiment of the present invention, screens for selecting the menu description language code do not have to be prepared in accordance with a plurality of menu description language codes, and an authoring operation at the time of preparation of the content is simplified. As a result, since an authoring operation time is shortened, the selling prices of the content can be reduced.

[Point 2]

To solve the problem described in (B1), a new SetM\_LCD command is defined as described later. The value of SPRM(0) can be changed by this SetM\_LCD command. This SetM\_LCD command is included in the command region of SetSystem as described later, and is usable only in FP\_PGC. As a specific command content, the value of SPRM(0) is set as a language code by a general parameter or a specific value which can be designated in SetM\_LCD.

[Point 3]

To solve the problem described in (B2), SPRM(21) is newly set as a place where only the use can change/set the language code and the changing by the command is impossible, so that the menu description language code set by the user can be held. Moreover, the meaning of SPRM(0) which has heretofore existed is changed a little. That is, the SPRM(21) is newly defined as a storage place of an initial menu language which is a parameter set to the information reproduction device. This SPRM(21) is a player setting language which can be changed/set only by the user, and cannot be changed by the command in the program of the content.

Moreover, the meaning of SPRM(0) is changed to a storage place of "current menu language being reproduced". This SPRM(0) can be changed/set both by the user and by the command in the content. As a result, even when SPRM(0) is changed by the command described in (B2), the menu description language code set by the user can be held, and any discomfort or excessive burden is not applied to the user.

[Concrete Description of Relation between SPRM(0) and SPRM(21)]

To describe a relation between SPRM(0) and SPRM(21), an example of the operation immediately after the insertion of the information storage medium

into the information reproduction device (player) will be described. First, the value of the initial setting menu language SPRM(21) which is the menu description language code set to the information reproduction device by the user is copied to SPRM(0) before executing the process of the first play PGC (FP\_PGC).

When the SetM\_LCD command exists in FP\_PGC, the value of SPRM(0) can be changed in accordance with the command, but in order to avoid the problem of (B2), the value copied from SPRM(21) is preferably held as the value of SPRM(0). If SPRM(0) is rewritten into a value different from that of SPRM(21) by the SetM\_LCD command in the content recorded in the information storage medium, the value of SPRM(21) is held. Therefore, when another information storage medium is next inserted, the value of SPRM(0) is automatically rewritten to that of SPRM(21). Therefore, after the next information storage medium is inserted, the problem of (B2) is avoidable. For example, when VOB for the menu does not exist in FP\_PGC, and exists in an HD video manager menu language unit (HDVMGM\_LU) 312c shown in the language selection menu in FIG. 6, the HD video manager menu language unit (HDVMGM\_LU) 312c corresponding to the value of the SPRM(0) is selected. The value of SPRM(21) is persistently changeable only by the user in a stage in which the operation of the information

reproduction device is stopped. However, even when the value of SPRM(21) is rewritten by the user, the value of SPRM(0) is not simultaneously rewritten, and the conventional value is held.

5 [Parameter Information Recording Place in Information Reproduction Device]

Regions in which system parameters SPRM "0" to "21" are stored are allocated into the memory 122 in a system block diagram in the information reproduction  
10 device shown in FIG. 48. The current menu language code information being reproduced is recorded in the SPRM(0), and the initial setting menu language code information is recorded in the SPRM(21).

[Object Information Recording Place]

15 As shown in FIG. 1E, a screen in which the menu description language code can be set is recorded in the region of a language selection menu VOBS for first play PGC (FP\_PGCM\_VOBS) 35. This object information (video data) is independent as a single file named  
20 HD\_FPPGC.HDV as shown in FIG. 2.

[Management Information Recording Place]

As shown in FIG. 4, management information with respect to the language selection menu in which the menu description language code can be set is recorded  
25 in first play PGCI (FP\_PGCI) in an HD video manager information management table (HDVMGI\_MAT) 310.



[2] Place where a content representing power to the user is lacking

(C) Seamless Reproduction of Still Picture

[Point 1]

5           Seamless connection between moving pictures is assured even in the conventional DVD content. Therefore, to solve the problems described in the above (C1) and (C2), even in the video object set (VOBS) in which the still picture is recorded, the contents of  
10   VOB are defined by the same image as those of VOBS in which the moving picture is recorded. Accordingly, the seamless connection (C1) from the still picture to the moving picture in the same manner as in the seamless connection between the conventional moving pictures and  
15   the multi-angle reproduction (C2) of the still picture can be assured.

[Point 2]

          A concrete method for realizing a way of thinking in [Point 1] will be described hereinafter. To apply  
20   an extended system target decoder (E-STD) which assures the seamless reproduction, an "imaginary access unit" is set in a period between I pictures in which the still picture is recorded. In a method of setting the access unit, in the embodiment of the present  
25   invention, an interval between I picture and the next I picture to start the still picture by a unit of a period of a video frame or a period integer times the

period of the video frame is imaginarily and finely time-divided for each period of the access unit. Moreover, the information reproduction device is imaginarily regarded as a device in which the still picture is repeatedly reproduced/displayed for each imaginary access unit. A decoding time stamp (DTS) indicating a timing at which the still picture is input into a decoder and a presentation time stamp (PTS) indicating a timing at which the still picture is displayed are set beforehand for each still picture. A video frame period is determined by a national television system committee (NTSC) system and a phase alternation by line (PAL) system, and therefore the timing of a boundary position of the "imaginary access unit" can be easily calculated. The problem of (C1) is solved even with respect to the still picture by setting the access unit. That is, the values of STC set in a separation unit 103, video decoder unit 111, sub-picture decoder unit 112, and audio decoder unit 114 shown in FIG. 48 are switched in the boundary position of the access unit to make possible the seamless connection reproduction to the moving picture from the still picture.

When the seamless reproduction/connection to the moving picture from the still picture is assured, the user can comfortably enjoy the content, and further the representing power of the content provider to the user

is enhanced. Moreover, the seamless connection/display to the moving picture from the still picture is possible only by the change in an imaginary definition without substantially changing the object structure of the conventional DVD video. Therefore, a most part of an authoring tool of the conventional DVD video is usable, and a rise in medium price in producing the present invention can be minimized.

[Point 3]

As one of the points for solving the problem of (C1), definition (restriction) with respect to the VOB including the still picture is modified in accordance with the contents of [Point 2] as follows. That is, an integer number of "imaginary access units" are imaginarily set so as to constitute one VOB. As a result, a display period of the VOB of each still picture is integer times that of the video frame. Since the switching timing to the moving picture from the still picture surely coincides with a boundary timing of the video frame by the above-described definition (restriction), the screen can be prevented from being disturbed at the switching time (the frame with a filled gap can be displayed instead of interleaved field display), and the screen immediately before/after the switching can be clearly displayed.

Since one I picture indicating the still picture exists in a video access unit (VAU), and an imaginary

video access unit (IVAU) does not include any I picture, any video data does not exist in the IVAU. Only one I picture exists in each of the VOBUs comprising VAU1 to IVAU15 and the VOBUs comprising VAU16 to IVAU30. In the embodiment of the present invention, a plurality of I pictures are prohibited from being included in the same VOBUs, and it is defined (restricted) that one VOBUs should surely have one or less I picture. Since the sequence end code is arranged after the I picture in conformity to the standards of MPEG2, it is defined (restricted) that the VOBUs including the I picture in this manner should surely have one sequence end code (i.e., both the I picture and the sequence end code are surely included in the same VOBUs without separating the picture and the code into separate VOBUs).

Moreover, the same VOBUs has a structure in which VAU is surely (imaginarily) arranged before IVAU. By the structure in which VAU is (imaginarily) arranged in the start position of the VOBUs, when the moving picture is switched to the still picture, it is possible to decode the I picture in the VAU at a high rate, and the seamless reproduction to the still picture from the moving picture is possible.

Any video data (I picture) is not included in the VOBUs comprising IVAU30 to IVAU45. It is also possible to define the VOB in which any video data is not held.

[Point 4]

As means for solving the problem of (C2), the IVAU is imaginarily defined with respect to a still picture object, and it is further possible to dispose still picture data (still picture object) into an interleaved unit (ILVU) by the following method. That is, a restriction that "the sequence end code is prohibited from being arranged in the video data in the cell constituting the interleaved block (ILVB)" in the current DVD video as described in (C2) is relaxed. Moreover, when the VOB is used in ILVU, the reproduction period in one VOB is set to be integer times that of the video frame with respect to the VOB including one or more sequence end codes, and a restriction is imposed that each VOB has only one I picture as the video data or is structured not to have any video data. Furthermore, one sequence end code is arranged in the VOB including the I picture, and the video data (I picture in which the still picture is recorded) is surely arranged in the first VOB in ILVU. Immediately after the angle is switched by user instruction or the like, the start position of the ILVU having the corresponding angle is surely accessed. Therefore, when the video data is surely arranged in the first VOB of ILVU, a time can be shortened until the display of the still picture at the angle switching time.

[Object Information Recording Place]

The still picture data in which the imaginary access unit is defined is recorded in a video object region for title (HDVTSTT\_VOBS) 43 in FIG. 1F. This  
5 region constitutes a VTS00102.HDV file of FIG. 2.

[Management Information Recording Place]

The management information to manage the still picture data in which the imaginary access unit is defined exists in an HD video title set information  
10 region (HDVTSI) 41 of FIG. 1F, and this region is integrated in a VTGS00100.IFO file of FIG. 2. As described above, since the period of the access unit is imaginarily and finely time-divided and imaginarily set  
15 by the unit of the period of the video frame or the period integer times that of the video frame, an actual boundary position of the imaginary access unit is calculated.

(D) Seamless Reproduction of Cell including Cell Command

20 [Point 1]

The seamless reproduction between the cells having cell commands is not assured in the conventional SD DVD video, whereas the seamless reproduction between the cells is assured even with respect to the cells which  
25 execute the cell commands in a case where there is not any branching point as in multi-angle. That is, the video reproduction of the next cell is started as

continuously as possible as long as there is not any branching point as in the multi-angle in the video reproduction (even when the cell command is executed). As means for realizing this reproduction, a physical arrangement of contents or the like is devised in such a manner that the reproduction of the next cell can be started within 0.5 second after completion of the reproduction of the previous cell.

[Point 2]

Moreover, the following is clearly described in the management information of the object (video data) concerning a place where the seamless reproduction between the cells is assured with respect to the cell in which the cell command is to be executed. Although not shown, a seamless reproduction flag, interleaved arrangement flag, STC discontinuous flag, and cell reproduction mod information exist in cell category information (C\_CAT) in cell playback information (C\_PBI) 530 shown in FIG. 38.

Even with respect to the cell in which the cell command is to be executed, concerning a place where the seamless reproduction between the cells is assured, it is set with respect to the seamless reproduction flag that "the cell should be seamlessly reproduced", it is set with respect to the interleaved arrangement flag that "the flag exists in a continuous block", it is set with respect to the STC discontinuous flag that "the

resetting of STC is unnecessary", and "continuous reproduction" is set to the cell reproduction mode.

[Point 3]

In the conventional SD DVD video, one command is  
5 selected and executed from a set of cell commands at  
the end of the reproduction of each cell. However, the  
restriction is abolished, and the execution of the cell  
command is not necessarily limited to the execution at  
the end of the reproduction of the cell. The execution  
10 of the cell command with respect to the cell is not  
limited to one command, and a plurality of commands can  
be sequentially executed. That is, as shown in  
FIG. 38, cell command start number information  
(C\_CMD\_SN) and cell command continuous number  
15 information (C\_CMD\_C\_Ns) are arranged in cell playback  
information (C\_PBI) of the management information with  
respect to one cell in the HD DVD video.

As shown in FIG. 35, cell commands (C\_CMD) 513 are  
sequentially arranged in the program chain command  
20 table (PGC\_CMDT) 51. The cell command start number  
information (C\_CMD\_SN) indicates the number of the cell  
command to be executed from the top of the string of  
arranged cell commands (C\_CMD) 513, and the cell  
command continuous number information (C\_CMD\_C\_Ns)  
25 indicates the number of commands which are sequentially  
and continuously executed from the command.



(E) Measure against Unmatched Highlight  
Information and Sub-Picture  
[Point 1]

5 To solve the problem of (E1), an independent  
stream "graphic unit" is newly defined, both the  
highlight information and the graphic data (heretofore  
arranged in the "sub-picture") are simultaneously  
arranged in the graphic unit, and the sub-picture  
information is separated. Accordingly, as described in  
10 the above (E1), a content maker can prepare the content  
as imaged without being influenced by the display  
period of the sub-picture information, a degree of  
freedom is enhanced, and, as a result, variety of  
contents can be presented to the user.

15 Moreover, five types of graphic units can be set  
in accordance with 16:9 HD image, 16:9 SD image, 4:3 SD  
image, letter boxed SD image, and pan scan SD image,  
and five types of sub-stream IDs can also be set for  
the respective types.

20 The highlight information is recorded in PCI  
recording region in the navigation pack in the  
conventional SD DVD video content, whereas the  
recording position of the highlight information is  
shifted into the graphic unit and 24 buttons at maximum  
25 can be simultaneously set in one screen in the HD DVD  
video content of the present invention. With respect  
to each button, 256 colors at maximum can be

designated, it is possible to change the color by the highlight at the selection time. Furthermore, mixing of contrasts up to 256 gradations can also be represented.

5 [Point 2]

To solve the problem described in (E2), instead of increasing the number of colors with respect to the conventional sub-picture stream, the number of usable colors is set to 256 (color representation by eight  
10 bits) with respect to the graphic data in the "graphic unit". As a result, it is possible to display a graphic unit image having bright colors to the user, a display impact to the user is enhanced, and the user can easily select the menu.

15 [Point 3]

To solve the problem described in (E3), the graphic data and mask data are arranged in the "graphic unit", display patterns of both the data can be set in a bit map form, and accordingly an optional shape can  
20 be set. As a result, it is possible to prepare a star-shaped or elliptic highlight information designated region (optional button shape), and there can be provided a screen much more attractive than that of the DVD content of the conventional SD.

25 [Point 4]

To solve the problem described in (E4), the mask data is arranged in the "graphic unit", and it is

possible to simultaneously set a plurality of regions  
(hot spots) apart from one another in the screen as the  
mask data. That is, masking data can be superposed  
upon and set to the respective buttons of the highlight  
5 information. As a result, there can be provided a menu  
screen which is not inferior to the PC screen including  
the same URL settable with respect to a plurality of  
regions apart from one another in the screen or to the  
homepage screen of internet and which is easy to use by  
10 the user.

[Object Information Recording Place]

The graphic units can be recorded in the following  
four places.

(1) The information is integrated in an  
15 HD\_FPPGC.HDV file of FIG. 2 in a region of language  
selection menu VOBS for first play PGC (FP\_PGCM\_VOBS)  
35 of FIG. 1E.

(2) The information is integrated in an  
HD\_VMG01.HDV file of FIG. 2 in the HD menu video object  
20 region (HDVMGM\_VOBS) 32 of FIG. 1E.

(3) The information is integrated in a  
VTS00100.HDV file of FIG. 2 in the HD menu video object  
region (HDVTSM\_VOBS) 42 of FIG. 1F.

(4) The information is integrated in a  
25 VTS00101.HDV or VTS00102.HDV file of FIG. 2 in the  
video object region for title (HDVTSTT\_VOBS) 43 of  
FIG. 1F.

[Data Structure in Object Information]

Four types of streams are separately recorded in accordance with the 16:9 HD image, 16:9 SD image, 4:3 SD image, and letter boxed SD image.

5           Moreover, as shown in FIG. 41, the graphic unit GU comprises highlight information (HIL) b2, mask data b3, and graphic data b4.

[Management Information Recording Place]

10           The control information on the structure of the graphic units to be arranged in the PGC is arranged in PGC graphic unit structure control table (PGC\_GUST\_CTLT) of FIGS. 33 and 34.

[Management Information Contents]

15           As the management information on the graphic unit included in the menu of the HD video manager, HDVMGM graphic unit stream number information (HDVMGM\_GUST\_Ns) and HDVMGM graphic unit stream attribute information (HDVMGM\_GUST\_ATR) are arranged in the HD video manager information management table (HDVMGI\_MAT) 310 as shown  
20           in FIG. 4.

          Moreover, as shown in FIG. 21, in the management information on the graphic unit included in the HD video title set (HDVTS), graphic unit stream number information and attribute information are divided into  
25           the menu screen and title (display video) in HDVTS, and are recorded as information of HDVTSM\_GUST\_Ns, HDVTSM\_GUST\_ATR, HDVTS\_GUST\_Ns, and HDVTS\_GUST\_ATR.

The information in a PGC graphic unit stream control table (PGC\_GUST\_CTLT) in which the control information on the stream of the graphic units to be arranged in the PGC is recorded is recorded in separate regions in accordance with four types of images (16:9 HD image, 16:9 SD image, 4:3 SD image, and letter boxed SD image) as shown in FIGS. 33 and 34.

(F) Audio Data Reproduction at Menu Screen  
Switching Display Time

[Point 1]

To solve the problem described in (F), a unique audio data storage place is set in accordance with the menu. The reproduction/display of the unique audio data is started simultaneously at a reproduction start time of the PGC in which the menu is displayed. The reproduction/display of the audio data is stopped simultaneously with the start of the reproduction of PGC (e.g., of VTS) which does not require the reproduction of the audio data, for example, with the completion of the display of a series of menu. The audio data is copied in the memory 122 of FIG. 48 before the menu is displayed, and the audio data copied in the memory 122 is continuously and repeatedly reproduced for a period for which the user shifts and displays the menu. A maximum capacity of the audio data which can be copied in the memory 122 is set to 8 MB. When a transfer rate of compressed audio data

is, for example, 384 Kbps, it is possible to store the audio data for 2.5 minutes with the maximum capacity of 8 MB.

[Point 2]

5            Selection designation information of the audio data is arranged in PGCI which is the management information of PGC so as to make possible selective reproduction instruction between the audio data recorded in VOBS for video present in the DVD video for  
10   the conventional SD and the above-described unique audio data. As a result, the content provider can designate the selection of the audio data continuously displayed even with the switching of the menu or the audio data set to be optimum for each menu, and the  
15   representing power of the content provider to the user is enhanced.

[Object Information Recording Place]

          As shown in FIG. 1E, a HD menu audio object region (HDMENU\_AOBS) 33 in which audio information to be  
20   output in parallel with menu display is recorded is newly arranged in an HD video manager recording region 30. A recording place of the HD menu audio object region 33 in a file structure is an HD\_MENU0.HDA file which is a unique file in a common directory (folder)  
25   of VIDEO\_HD as shown in FIG. 2. In the embodiment of the present invention, it is possible to record a plurality of types of menu audio objects (audio data)

in the information storage medium. Menu audio objects (AOB) are arranged/recorded in order in the HD menu audio object region (HDMENU\_AOBS) 33 as shown in FIG. 19.

5 [Management Information Recording Place]

Management data with respect to the object of the HD menu audio object region (HDMENU\_AOBS) 33 is recorded in an HD menu audio object set information table (HDMENU\_AOBSIT) 318 in the HD video manager information region (HDVMGI) 31 as shown in FIG. 3.

Moreover, in a place where information for referring to (designating) HD menu AOB (HDMENU\_AOB) is set with respect to the whole menu in the embodiment of the present invention, as shown in FIG. 7, the information is arranged in HDVMGM\_PGC category information (HDVMGM\_PGC\_CAT) in an HDVMGM\_PGCI search pointer #n (HDVMGM\_PGCI\_SRP #n) 312c2 in an HD video manager menu language unit 312c. Concerning the menu by an HDVTS unit, as shown in FIG. 26, the information is arranged in an HDVTSM\_PGC category information (HDVTSM\_PGC\_CAT) in an HDVTS\_PGCI search pointer #n (HDVTSM\_PGCI\_SRP #n) 413c2.

In another embodiment of the present invention, as shown in FIGS. 33 and 34, the information is arranged in an RSM&AOB category (RSM&AOB\_CAT) in the program chain general information (PGC\_GI) 50.

[Management Information Content]

Concerning the whole menu, as shown in FIG. 7, the followings are recorded in the HDVMGM\_PGC category information (HDVMGM\_PGC\_CAT) in the HDVMGM\_PGCI search pointer #n (HDVMGM\_PGCI\_SRP #n) 312c2 in the HD video manager menu language unit 312c. Concerning the menu by the HDVTS unit, as shown in FIGS. 26 and 27, the followings are recorded in the HDVTSM\_PGC category information (HDVTSM\_PGC\_CAT) in the HDVTS\_PGCI search pointer #n (HDVTSM\_PGCI\_SRP #n) 413c2:

(1) Audio information number designating AOB number #n to be reproduced in HDMENU\_AOBS (the number of the corresponding AOB in the AOBs for the menu (HDMENU\_AOB) arranged in FIG. 19); and

(2) Audio information selection flag indicating selected information of audio information to be reproduced simultaneously with the screen display of the HD content menu, and start/continue/end trigger information of audio information reproduction.

FIGS. 7 and 24 or 33 and 34 show management information which designates the HD menu audio object to be displayed simultaneously with the display of the menu screen. Accordingly, as shown in FIG. 17, contents of management information with respect to the menu audio object comprise HD menu audio object set information table information (HDMENU\_AOBSITI) 318a and HD menu audio object information (HDMENU\_AOBI) 318



which are individual management information with respect to the AOBs for the menu recorded in the information storage medium.

5 This HDMENU\_AOBI includes: HDMENU\_AOB\_PBI indicating playback information (playback time of music) of HDMENU\_AOB; HDMENU\_AOB\_ATR indicating attributes (LPCM, AC-3, and the like) of the object; and HDMENU\_AOB\_SA, HDMENU\_AOB\_EA indicating a start address and an end address of HDMENU\_AOB#n. An  
10 absolute or relative size of HDMENU\_AOB#n is sometimes written with respect to the start or end address.

Moreover, the information of (1), (2) may also be represented by RSM&AOB\_CAT in FIG. 33.

[Access Information]

15 As shown in FIG. 4, HDMENU\_AOBS start address information (HDMENU\_AOBS\_SA) indicating a place where the HD menu audio object region (HDMENU\_AOBS) 33 is recorded, and HDVMGM\_AOB information table start address information (HDMENU\_AOBSIT\_SA) indicating a  
20 place where the HD menu audio object set information table (HDMENU\_AOBSIT) 318 is recorded are recorded in the HD video manager information management table (HDVMGI\_MAT) 310. The audio information to be output  
25 simultaneously with the menu display in the information storage medium (optical disk or HD DVD disk) is recorded in the region 33, and the management information for the audio object for the menu is

recorded in the table 318.

(G) The above-described subject matters are provided, and the representing power to the user is further enhanced. Moreover, the content easy to use by the user is managed in a directory (folder) separated from a place where the conventional DVD video content is recorded as shown in FIG. 2. That is, in the conventional DVD video content, video information (video data, sub-picture data, and audio data are generically referred to as the video object) and the management data for managing the video information are integrated, arranged, and managed under the directory (folder) named VIDEO\_TS.

On the other hand, in the content having the subject matters (A) to (F), the video and the management data for managing the video information are managed together in another directory (folder) named VIDEO\_HD as shown in FIG. 2, and convenience of reproduction control of the information reproduction device is enhanced.

In the HD content of the present invention, the HD\_MENU0.HDA file exists in which the audio information to be output simultaneously with the menu display is recorded, but the file does not exist in the conventional DVD video content.

Moreover, the information reproduction device according to the present invention includes a graphic

decoder unit 113 as shown in FIG. 48, but the information reproduction device for reproducing the conventional DVD video content does not include the graphic decoder unit 113. Therefore, when the  
5 conventional DVD video content and the HD content of the present invention are mixed/reproduced, a circuit and control program for use in each content need to be switched on an information reproduction device side. When the directory (folder) is divided for each content  
10 as shown in FIG. 2, it is very easy to identify the content on the information reproduction device side. By the process of switching the circuit and control program at the time of access to the file, a switching process is smoothly performed at a high rate, when the  
15 HD and SD contents are mixed/reproduced.

<<Relation among Subject Matters>>

In the present invention, the content easy to use by the user by simple authoring is provided by a combination of subject matters (A), (B), the content  
20 representing power to the user is further enriched by a combination of subject matters (C) to (F), and the appeal of the DVD video to the user is further enhanced.

An effect of the combination of the subject  
25 matters (A) to (F) will be concretely described in accordance with two examples.

[I] Example of a case where the user selects an optimum language from the menu and thereafter searches for a place to see using another menu

After the HD DVD video disk (information storage  
5 medium) is attached to the information reproduction  
device of the present invention, a screen for selecting  
the language by the user is displayed in a first  
displayed screen (FP\_PGC) (B). At this time, a unique  
shape different from a conventional rectangular shape  
10 is displayed with respect to the highlight information  
indicating the language to be selected by the user in  
the screen (E), and accordingly the user can easily  
select the language. For example, when the language of  
each country is displayed in the screen, the shape of  
15 the corresponding country on the geographical map is  
displayed in a display range of the highlight  
information, and the user can only identify the shape  
of the display range of the highlight information  
without reading the language to be selected to  
20 designate the desired language. Japan is marked in red  
on the terrestrial globe or global map in many cases.  
Therefore, 256 display colors of the graphic units are  
arranged (E), each language is displayed in the  
corresponding color (Japanese is displayed in red), and  
25 the user can only identify the color to identify the  
corresponding language.

Moreover, after selecting the language, the user

shifts to a thumbnail (reduced image indicating a top  
screen designating a playback start position) list of  
titles, and searches for a video place to see in many  
cases. Even in the conventional DVD video menu, a text  
5 indicating the playback start position is displayed  
under the thumbnail in many cases. At this time, the  
user can further easily search for the place to see  
using the graphic unit (E). That is, the display range  
of the highlight information is displayed in the "star  
10 shape" in a place indicating a large pause such as a  
large change of scene in a video title, the inside of  
the star is represented in conspicuous colors such as  
red. A place which belongs a lower class and which  
indicates a skip destination is displayed by a "round  
15 mark" and is represented in light yellow or blue and  
can be graphically displayed so that a large pause is  
eliminated.

Furthermore, when the subject matter described in  
(F) is used, the audio information can be output  
20 continuously without being interrupted in a period of a  
series of operation in which "the user shifts to the  
thumbnail list of the titles, after selecting the  
language, to search for the video place to see" (even  
when the menu screen for the language selection  
25 switches to the title thumbnail list screen). The user  
can readily switch the menu.

A concrete process method for realizing the above

operation in the information reproduction device shown in FIG. 48 will be described. When the HD DVD video disk (information storage medium 1) is attached to the information reproduction device, a disk drive 101 reads the HD video manager information region (HDVMGI) 31 and HD video title set information region (HDVTSI) 41 shown in FIGS. 1E and 1F which are management information to read the regions into the memory 122. Next, an MPU 121 analyzes a content temporarily stored in the memory 122 to confirm presence/absence of audio data AOB of a preload reproduction object. When the MPU 121 determines that the audio data AOB of the preload reproduction object exists, the MPU 121 controls the disk drive 101 to read the HD menu audio object information (HDMENU\_AOBS) 33 shown in FIG. 1E, and the information is temporarily stored in the memory 122. Next, a menu screen for the language selection is displayed with respect to the user in accordance with the information of the first play PGCI (FP\_PGCI) shown in FIG. 4. Moreover, the reproduction of the audio data AOB temporarily stored in the memory 122 is started. Next, at the time of the switching to the screen showing the thumbnail list of the titles by the user, the audio information number in HDVTSM\_PGC\_CAT shown in FIG. 27 coincides with the AOB number reproduced at the time of the display of the menu for the language selection. When the audio information

selection flag is set to "10b" (HDMENU\_AOBS is continuously reproduced), the audio data is continuously output without being influenced by the switching of the menu screen.

- 5 [II] Example of the returning to the video title after displaying the menu screen and bonus content halfway in the video title reproduction

The reproduction of the multi-angle comprising a plurality of types of slide shows for continuously reproducing the still pictures by the definition of the  
10 imaginary VAU (IVAU), or the multi-angle comprising the slide show of the still pictures and the moving pictures is seamlessly performed (C). The reproduction between the cells in which the cell command is executed  
15 can be seamlessly performed (D). By a method of setting an RSM permission flag in HDVTS\_PGC\_CAT (setting of "0b: permission") shown, for example, in FIG. 24 which is the management information for managing the seamless reproduction, the user calls the  
20 menu screen halfway in the seamless reproduction of the above-described multi-angle or halfway in the seamless reproduction between the cells in which the cell command is executed. Thereafter, for example, when returning from the display of the bonus content such as  
25 a movie preview and a shooting spot (additionally, in a case where the RSM permission flag in HDVTS\_PGC\_CAT corresponding to the bonus content is set to "1b:

prohibition"), it is possible to continue the seamless reproduction of the multi-angle or the seamless reproduction between the cells to execute the cell command (A). Especially, the seamless reproduction is not assured with respect to the multi-angle comprising the slide show of still pictures and the moving picture in the conventional SD DVD video standards. However, by the combination of the subject matters (A) and (C) or (A) and (D), after the screen jumps from "menu screen" → "bonus content reproduction" halfway in the multi-angle video reproduction, the screen returns to the original multi-angle video comprising the slide show of still pictures and the moving picture, and subsequently the seamless reproduction is continued.

This and versatile representation modes can be realized.

Furthermore, a combination effect of these subject matters will be described in a case where the following process is performed as an example indicating versatile representation modes by a combination of these subject matters.

- (1) Halfway in the display of painters' names (in sub-pictures) and continuously switching paintings with sound explanations,
- (2) sound language for the explanation is switched at the menu screen. Furthermore,
- (3) the menu screen is instructed so as to delete



the painters' names simultaneously displayed in the sub-pictures.

(4) After the reproduction of bonus video in which a specific painting is explained in detail,

5 (5) the reproduction is continued from the painting immediately before the shifting to the menu screen.

In the conventional SD DVD video standards, when returning to the operation of (5), it is not easy to  
10 "continue the reproduction from the painting immediately before the shifting to the menu screen". When returning to the operation of (5), the user needs to turn over the paintings from the beginning. A complicated authoring process is required in a case  
15 where the forcible continuing of the reproduction from the painting just before is programmed. When (2) and (3) are performed, the continuous reproduction without interrupting the audio data is impossible in the conventional DVD video, and this is not possible until  
20 the subject matter (F) is achieved. A data structure in which the subject matters (A), (C), (D), and (F) can be simultaneously achieved is defined in the standards, accordingly the memory capacity of the memory 122 of the information reproduction device shown in FIG. 48 is  
25 set, the management method in a memory region is set, and it is possible to simultaneously achieve the subject matters (A), (C), (D), and (F). That is, at

the time of the switching to the menu screen in accordance with the subject matter (A), the values of system parameters 4 (title number) to 8 (highlight button number) are set. Moreover, a region in the memory 122 is secured in which the corresponding cell number information, address information of the navigation pack arranged first in the corresponding cell, and information of the number of VTS are recorded, and the information is managed based on the RSM permission flag information of FIG. 24. A place where the data for the interleave unit (ILVU) corresponding to the imaginary video access unit IVAU can be recorded is secured in the memory 122 in order to execute (C) in parallel. A storage region of (preload) audio data to be temporarily stored beforehand is allocated into the memory 122 in such a manner that (F) can be achieved, and the allocated region is managed based on audio information selection and audio information number shown in FIGS. 8 and 27.

In the information reproduction device in the embodiment of the present invention, the memory 122 is managed in this manner, and simultaneous achievement of the subject matters (A), (C), (D), and (F) is made possible.

Moreover, the subject matter (E) is used in the stage of the operation of the subject matters (2) and (3), 256 colors are represented, and the display

contour of the highlight information is constituted in a unique shape (other than the rectangular shape), so that the user can easily see and select the selection menu (this has been impossible in the conventional DVD video standards). By combining the subject matter (F),  
5 further comfort can be presented to the user.

Moreover, in the embodiment of the present invention, the sub-picture stream is prohibited from being arranged in FP\_PGC, and instead the use of the graphic unit is defined. The 256 color representation  
10 in which the language selection menu screen to the user is defined by the graphic unit and the contour shape (not limited to the rectangular shape) of the screen region in which the highlight information is shown can be variously set. Therefore, the language selection  
15 menu screen to the user is further easily selected. For example, the user can select the language code by the shape or the color without reading characters by the following representation.

20 (a) "Japanese" is described, a screen region is formed in "a shape of Japanese map", and the inside is marked in "red" often used in the terrestrial globe or the global map in a place where Japanese is selected.

(b) "English" is described, and the screen region  
25 is formed in "a star shape" while conscious of Stars and Stripes where English (American language) is selected.

(c) Furthermore, the inside of the star shape is marked in "blue" using the color of a part including the stars in Stars and Stripes.

Especially, as shown in FIG. 4, the information of first play PGCI (FP\_PGCI) in which the management information is recorded with respect to the menu for the language selection to the user, exhibiting the subject matter (B) is arranged. Moreover, start address information (HDMENU\_AOBS\_SA) of HDMENU\_AOBS, and start address information (HDMENU\_AOBSIT\_SA) of HDMENU\_AOBS information table, exhibiting the subject matter (F), are arranged. HDVMGM graphic unit stream number information (HDVMGM\_GUST\_Ns), and HDVMGM graphic unit stream attribute information (HDVMGM\_GUST\_ATR), exhibiting the subject matter (E), are also arranged in common HD video manager information management table (HDVMGI\_MAT) 310. In this case, the management is facilitated. The process program is simplified in the simultaneous or continuous representation of the subject matters (A) to (F) to the user in the information reproduction device of the embodiment of the present invention. The reliability and stability of the information reproduction device are enhanced. Additionally, price reduction of the information reproduction device can be achieved by the simplification of the program.

Similarly, as shown in FIGS. 33 and 34, RSM

permission flag information exhibiting the subject  
matter (A) in the embodiment of the present invention,  
PGC graphic unit stream control table information  
(PGC\_GUST\_CTLT) exhibiting the subject matter (E), and  
5 the audio information selection and audio information  
number exhibiting the subject matter (F) are arranged  
in the common program chain general information  
(PGC\_GI) 50 to facilitate the management. In the  
simultaneous or continuous representation of the  
10 subject matters (A) to (F) to the user in the  
information reproduction device of the embodiment of  
the present invention, the process program is  
simplified, the reliability and stability of the  
information reproduction device are enhanced, and the  
15 price reduction of the information reproduction device  
can be achieved by the simplification of the program.

Contents of information to be recorded in  
a disc-shaped information storage medium 1 in the  
embodiment of the present invention will be described  
20 with reference to FIGS. 1A, 1B, 1C, 1D, 1E, and 1F.  
The information storage medium 1 comprises a lead-in  
region 10, data region 12, and lead-out region 13 from  
an inner peripheral side.

In the information storage medium 1, a bridge  
25 structure of ISO9660 and UDF, and a part of the data  
region 12 has a volume/file structure information  
region 11 of ISO9660 and UDF. Mixed arrangement of a

video data recording region 20 and general computer information recording region 22 is permitted in the data region 12. The video data recording region 20 comprises an HD video manager recording region (HDVMG: HD video manager) 30 in which management information on the whole HD DVD video content recorded in the video data recording region 20 is recorded; and HD video title set recording regions (HDVTS: HD video title set) 40 which are integrated for titles and in which the management information and video information (video object) are integrated/recorded for each title.

The HD video manager recording region (HDVMG: HD video manager) 30 comprises an HD video manager information region (HDVMGI: HD video manager information) 31 indicating the management information on the whole video data recording region 20; an HD video manager information backup region (HDVMGI\_BUP) 34 for the backup, in which the same information as that of the HD video manager information region (HDVMGI: HD video manager information) 31 is recorded; and an HD menu video object region (HDVMGM\_VOBS) 32 in which a top menu screen indicating the whole video data recording region 20 is recorded. Furthermore, in the embodiment of the present invention, an HD menu audio object region (HDMENU\_AOBS) 33 in which the audio information to be output in parallel at the menu display time is recorded is newly arranged in the HD

video manager recording region 30. In the embodiment of the present invention, a screen capable of setting the menu description language code is recorded in the region of the language selection menu VOBS for first  
5 play PGC (FP\_PGCM\_VOBS) 35.

The HD video title set recording region (HDVTS: HD video title set) 40 in which the management information and video information (video object) for each title are integrated and recorded comprises an HD video title set  
10 information region (HDVTSI) 41 in which the management information on all the contents in the HD video title set recording region (HDVTS: HD video title set) 40 is recorded; an HD video title set information backup region (HDVTSI\_BUP) 44 in which the same information as  
15 that of the HD video title set information region (HDVTSI) 41 is recorded as the backup data; an HD menu video object region (HDVTSM\_VOBS) 42 in which the information of the menu screen is recorded by a video title set unit; and a video object region for title  
20 (HDVTSTT\_VOBS) 43 in which video object (video information of title) data in the video title set is recorded.

Each region constitutes a separate file in a file system including the bridge structure of ISO9660 and  
25 UDF. As shown in FIG. 2, the conventional SD DVD video contents are integrated and arranged under the directory named "VIDEO\_TS". On the other hand, in the

embodiment of the present invention, the directory is divided, and the HD DVD video contents are integrated and arranged under the directory named "VIDEO\_HD".

That is, the recording place in the file structure of the HD menu audio object region 33 is a unique file which is an HD\_MENU0.HDA file in the common directory (folder) of VIDEO\_HD shown in FIG. 2. Screen data (video data) for setting the menu description language code is independent as a single file first in the region of the language selection menu VOBS for first play PGC (FP\_PGCM\_VOBS) 35, and the file name is HD\_FPPGC.HDV. The HD video manager information region (HDVMGI: HD video manager information) 31 is stored in an HD\_VMG00.HDI file. The HD video manager information backup region (HDVMGI\_BUP) 34 is stored in an HD\_VMG00.BUP file. The HD menu video object region (HDVMGM\_VOBS) 32 is stored in an HD\_VMG01.HDV file. The HD video title set information region (HDVTSI) 41 is stored in a VTS00100.IFO file. The HD video title set information backup region (HDVTSI\_BUP) 44 is stored in a VTS00100.BUP file. The HD menu video object region (HDVTSM\_VOBS) 42 is stored in a VTS00100.HDV file. The video object region for title (HDVTSTT\_VOBS) 43 is stored in a VTS00101.HDV file or VTS00102.HDV file. The regions are stored in the individual files in this manner.

A detailed data structure in the HD video manager



information region (HDVMGI) 31 shown in FIG. 1E is shown in FIG. 3.

The management data with respect to the object of the HD menu audio object region (HDMENU\_AOBS) 33 is recorded in an HD menu audio object set information table (HDMENU\_AOBSIT) 318 in the HD video manager information region (HDVMGI) 31 as shown in FIG. 3.

A data structure from the HD video manager information management table (HDVMGI\_MAT) 310 to the HD video

manager menu video object unit address map

(HDVMGM\_VOBU\_ADMA) 317 matches the management

information of the conventional SD DVD video. In the embodiment of the present invention, the newly added HD menu audio object set information table (HDMENU\_AOBSIT)

318 is arranged separately from and behind a part matching the management information of the conventional DVD video. Accordingly, the conventional control program using the management information of the conventional SD DVD video can also be used, and the control program of the information reproduction device for the embodiment of the present invention can be simplified.

Moreover, the HD video manager information region (HDVMGI) 31 includes HD video manager information management table (HDVMGI\_MAT) information 310 in which the management information common to the whole HD DVD video content recorded in the video data recording

region 20 is integrated and recorded; title search  
pointer table (TT\_SRPT) information 311 in which  
information useful for searching for each title present  
in the HD DVD video content (playback start position  
5 detection) is recorded; HD video manager menu PGCI unit  
table (HDVMGM\_PGCI\_UT) information 312 in which the  
management information of the menu screen divided and  
arranged for each menu description language code  
displaying the menu is recorded; parental management  
10 information table (PTL\_MAIT) information 313 in which  
information for managing video which can be shown or  
cannot be shown to children as parental information is  
recorded; HD video title set attribute information  
table (HDVTS\_ATRT) information 314 in which attributes  
15 of the title set are integrated and recorded; text data  
manager (TXTDT\_MG) information 315 in which text  
information displayed to the user is integrated and  
recorded; HD video manager menu cell address table  
(HDVMGM\_C\_ADT) information 316 in which information  
20 useful for searching for the start address of the cell  
constituting the menu screen is recorded; and HD video  
manager menu video object unit address map  
(HDVMGM\_VOBU\_ADMAP) information 317 in which address  
information of VOBU indicating a minimum unit of the  
25 video object constituting the menu screen is recorded.

A detailed data structure in the HD video manager  
information management table (HDVMGI\_MAT) 310 of FIG. 3

is shown in FIG. 4.

As shown in FIG. 4, the information of the first play PGC (FP\_PGC) in which the management information on the menu for the language selection by the user, exhibiting the subject matter (B), the start address information (HDMENU\_AOBS\_SA) of HDMENU\_AOBS and the start address information (HDMENU\_AOBSIT\_SA) of HDVMGM\_AOBS information table, exhibiting the subject matter (F), and graphic unit stream number information (HDVMGM\_GUST\_Ns) of HDVMGM and graphic unit stream attribute information (HDVMGM\_GUST\_ATR) of HDVMGM, exhibiting the subject matter (E) are arranged in the common HD video manager information management table (HDVMGI\_MAT) 310.

Additionally, in the HD video manager information management table (HDVMGI\_MAT) 310, various information are recorded such as an HD video manager identifier (HDVMG\_ID); end address (HDVMG\_EA) of HD video manager; an end address (HDVMGI\_EA) of HD video manager information; a version number (VERN) of HD-DVD video standards; an HD video manager category (HDVMG\_CAT); a volume set identifier (VLMS\_ID); adaptation identifier (ADP\_ID); the number of HD video title sets (HDVTS\_Ns); a provider unique identifier (PVR\_ID); a POS code (POS\_CD); an end address (HDVMGI\_MAT\_EA) of an HD video manager information management table; a start address (FP\_PGC\_SA) of first play program

chain information; a start address (HDVMGM\_VOBS\_SA) of HDVMGM\_VOBS; a start address (TT\_SRPT\_SA) of TT\_SRPT; a start address (HDVMGM\_PGCI\_UT\_SA) of HDVMGM\_PGCI\_UT; a start address (PTL\_MAIT\_SA) of PTL\_MAIT; a start  
5 address (HDVTS\_ATRT\_SA) of HDVTS\_ATRT; a start address (TXTDT\_MG\_SA) of TXTDT\_MG; a start address (HDVMGM\_C\_ADT\_SA) of HDVMGM\_C\_ADT; a start address (HDVMGM\_VOBU\_ADMAP\_SA) of HDVMGM\_VOBU\_ADMAP; an HDVMGM video attribute (HDVMGM\_V\_ATR); an HDVMGM audio stream  
10 number (HDVMGM\_AST\_Ns); an HDVMGM audio stream attribute (HDVMGM\_AST\_ATR); an HDVMGM sub-picture stream number (HDVMGM\_SPST\_Ns); and an HDVMGM sub-picture stream attribute (HDVMGM\_SPST\_ATR).

A data structure in the title search pointer table  
15 (TT\_SRPT) 311 shown in FIG. 3 is shown in FIG. 5. The title search pointer table (TT\_SRPT) 311 comprises title search pointer table information (TT\_SRPTI) 311a and title search pointer (TT\_SRP) information 311b. An optional number of pieces of title search pointer  
20 (TT\_SRP) information 311b in the title search pointer table (TT\_SRPT) 311 can be set in accordance with the title number in the HD DVD video content. Common management information of the title search pointer table (TT\_SRPT) 311 is recorded in the title search  
25 pointer table information (TT\_SRPTI) 311a. Information of the number of title search pointers (TT\_SRP\_Ns) included in the title search pointer table (TT\_SRPT)

311, and end address (TT\_SRPT\_EA) information of the title search pointer table (TT\_SRPT) 311 in the file (HD\_VMG00.HDI) of HD video manager information region (HDVMGMI) are recorded.

5           Moreover, in one piece of title search pointer (TT\_SRP) information 311b, various information are recorded such as title playback type (TT\_PB\_TY) concerning the title indicated by this search pointer; angle number (AGL\_Ns); the number (PTT\_Ns) of  
10   Part\_of\_Title (PTT); Parental\_ID\_Field (TT\_PTL\_ID\_FLD) information for the title; HDVTS number (HDVTSN); HDVTS title number (HDVTS\_TTN); and the start address (HDVTS\_SA) of the present HDVTS.

          Next, a data structure in the HD video manager  
15   menu PGCI unit table (HDVMGM\_PGCI\_UT) 312 shown in FIG. 3 is shown in FIG. 6. In the HD video manager menu PGCI unit table (HDVMGM\_PGCI\_UT) 312, an HD video manager menu program chain information unit table information (HDVMGM\_PGCI\_UTI) 312a in which common  
20   management information in the HD video manager menu PGCI unit table (HDVMGM\_PGCI\_UT) 312 is recorded, and an HD video manager menu language unit (HDVMGM\_LU) 312c which is integrated for each menu description language code to display the menu and in which the management  
25   information on the menu information is recorded are recorded. The information of the HD video manager menu language unit (HDVMGM\_LU) 312c is arranged by the

number of menu description language codes supported by the HD DVD video content. In order to facilitate the access to the HD video manager menu language unit (HDVMGM\_LU) 312c for each menu description language code, the HD video manager menu PGCI unit table (HDVMGM\_PGCI\_UT) 312 includes the number of pieces of HD video manager menu language unit search pointer (HDVMGM\_LU\_SRP) information 312b including the start address information of each HD video manager menu language unit (HDVMGM\_LU) 312c. The number of pieces is equal to that of HD video manager menu language units (HDVMGM\_LU) 312c.

The HD video manager menu PGCI unit table (HDVMGM\_PGCI\_UT) 312 includes information on the number (HDVMGM\_LU\_Ns) of HD video manager menu language units; and end address (HDVMGM\_PGCI\_UT\_EA) information of the HD video manager menu PGCI unit table (HDVMGM\_PGCI\_UT) 312 in the file (HD\_VMG00.HDI) of HD video manager information region (HDVMGI).

Moreover, the information on the HD video manager menu language unit search pointer (HDVMGM\_LU\_SRP) 312b includes not only difference address information (HDVMGM\_UT\_SA) of the start position of the HD video manager menu PGCI unit table (HDVMGM\_PGCI\_UT) 312 to the start position of the corresponding HD video manager menu language unit (HDVMGM\_LU) 312c in the file (HD\_VMG00.HDI of FIG. 2) of the HD video manager

information region (HDVMGI) described above; but also the information on HD video manager menu language code (HDVMGM\_LCD) indicating the menu description language code of the corresponding HD video manager menu language unit (HDVMGM\_LU) 312c; and HD video manager presence/absence (HDVMGM\_EXST) information indicating whether or not the corresponding HD video manager menu language unit (HDVMGM\_LU) 312c includes the menu screen displayed to the user as VOB.

10           A detailed data structure in the HD video manager menu language unit #n (HDVMGM\_LU #n) 312c (FIG. 6) recorded in the HD video manager menu PGCI (HDVMGM\_PGCI\_UT) 312 shown in FIG. 3 is shown in FIG. 7.

15           The HD video manager menu language unit (HDVMGM\_LU) 312c includes various information such as HD video manager menu language unit information (HDVMGM\_LUI) 312c1 in which common management information on the menu in the HD video manager menu language unit (HDVMGM\_LU) 312c is recorded; HD video manager menu program chain information (HDVMGM\_PGCI) 312c3 including the structure shown in FIG. 7; and HDVMGM\_PGCI search pointer (HDVMGM\_PGCI\_SRP #1) information 312c2 indicating the difference address of  
20           the start position of the HD video manager menu language unit (HDVMGM\_LU) 312c to the start position of  
25           each HD video manager menu program chain information

(HDVMGM\_PGCI) 312c3 in the file (HD\_VMG00.HDI) of the HD video manager information region (HDVMGI).

The HD video manager menu language unit information (HDVMGM\_LUI) 312c1 arranged in the first region (group) in the HD video manager menu language unit #n (HDVMGM\_LU #n) 312c includes the information on the number of HDVMGM\_PGCI\_SRP s (HDVMGM\_PGCI\_SRP\_Ns); and end address (HDVMGM\_LU\_EA) information of HDVMGM\_LU. The information on HDVMGM\_PGCI search pointer (HDVMGM\_PGCI\_SRP #1) 312c2 includes start address (HDVMGM\_PGCI\_SA) information of HDVMGM\_PGCI; and HDVMGM\_PGC category (HDVMGM\_PGC\_CAT) information.

In the HDVMGM\_PGC category information (HDVMGM\_PGC\_CAT) in the HDVMGM\_PGCI search pointer #n (HDVMGM\_PGCI\_SRP #n) 312c2, selection information of audio information produced simultaneously with the screen display of the menu of HD content in the present invention, and an audio information selection flag (audio information selection) indicating the start/end trigger of audio information reproduction are recorded. Either of the following can be selected as the audio data reproduced simultaneously with the screen display of the menu of the HD content in the present invention:

(1) audio data recorded in the HD menu video object region (HDVMGM\_VOBS) 32 shown in FIG. 1E (scattered/recorded in the audio pack although not shown); and



(2) audio data which exists in the HD menu audio object region (HDMENU\_AOBS) 33 shown in FIG. 1E and in which one or more HD menu AOBs (HDMENU\_AOB) are arranged in order as shown in FIG. 19.

5           Here, when "00b" of the audio information selection flag (audio information selection) is selected, the audio data of (1) is reproduced, and sound reproduction is interrupted at the switching time of the menu. When "10b" of "11b" of the audio  
10           information selection flag (audio information selection) is selected, the audio data of the HD menu AOB (HDMENU\_AOB) present in the HD menu audio object region (HDMENU\_AOBS) 33 shown in (2) is reproduced. To reproduce the audio data shown in (2), when "11b" is  
15           designated, the reproduction of the audio data is started from the beginning every change of the menu screen. When "10b" is designated, the reproduction of the audio data is continued regardless of the switching of the menu screen. In the embodiment of the present  
20           invention, as shown in FIG. 19, a plurality of types of HD menu AOBs (HDMENU\_AOB) are stored beforehand in the HD menu audio object region (HDMENU\_AOBS) 33. The audio information number shown in FIG. 8 shows the selection information of the HD menu AOB (HDMENU\_AOB)  
25           reproduced simultaneously with the display of the corresponding PGC for menu display. The AOB is selected from the HD menu AOBs arranged in FIG. 19 by

number information indicating "the number of AOBs to be selected from above" which is the selection information of the HD menu AOB.

As shown in FIG. 8, in the HDVMGM\_PGC category (HDVMGM\_PGC\_CAT) information, entry type information for judging entry PGC, menu ID information indicating identification of the menu (e.g., the menu of the title or the like), block mode information, block type information, and PTL\_ID\_FLD information are recorded.

A data structure in the parental management information table (PTL\_MAIT) 313 shown in FIG. 3 is shown in FIG. 9. In parental management information table information (PTL\_MAITI) 313a, various information are recorded such as the number of countries (CTY\_Ns), the number of HDVTS (HDVTS\_Ns), and the end address (PTL\_MAIT\_EA) of PTL\_MAIT. A parental management information search pointer (PTL\_MAI\_SRP) 313b includes information of a country code (CTY\_CD) and the start address (PTL\_MAI\_SA) of PTL\_MAI.

Moreover, the data structure in the parental management information (PTL\_MAI) 313c shown in FIG. 9 includes parental level information (PTL\_LVLII) 313c1 as shown in FIG. 10. The parental level information (PTL\_LVLII) 313c1 includes information of Parental\_ID\_Field (PTL\_ID\_FLD\_HDVMG) 313c11 for HDVMG and Parental\_ID\_Field (PTL\_ID\_FLD\_HDVTS) 313c12 for HDVTS. Furthermore, Parental\_ID\_Field (PTL\_ID\_FLD)

exists in the information of Parental\_ID\_Field  
(PTL\_ID\_FLD\_HDVTS) 313c12 for HDVTS.

As shown in FIG. 11, the HD video title set  
attribute information table (HDVTS\_ATRT) 314 shown in  
5 FIG. 3 comprises:

(a) HD video title set attribute table information  
(HDVTS\_ATRTI) 314a including information of the number  
of HDVTS (HDVTS\_Ns) and the end address (HDVTS\_ATRT\_EA)  
of HDVTS\_ATRT;

10 (b) an HD video title set attribute search pointer  
(HDVTS\_ATR\_SRP) 314b in which the information of the  
start address (HDVTS\_ATR\_SA) of HDVTS\_ATR is recorded;  
and

(c) an HD video title set attribute (HDVTS\_ATR)  
15 314c including each information of the end address  
(HDVTS\_ATRT\_EA) of HDVTS\_ATR, category of the HD video  
title set (HDVTS\_CAT), and attribute information of the  
HD video title set (HDVTS\_ATRI).

As shown in FIG. 12, the text data manager  
20 (TXTDT\_MG) 315 shown in FIG. 3 comprises:

(a) text data manager information (TXTDT\_MGI) 315a  
including information such as a text data identifier  
(TXTDT\_ID), the number (TXTDT\_LU\_Ns) of TXTDT\_LUs, and  
end address (TXTDT\_MG\_EA) of the text data manager;

25 (b) a text data language unit search pointer  
(TXTDT\_LU\_SRP) 315b in which various information such  
as a text data language code (TXTDT\_LCD), character set

(CHRS) and start address (TXTDT\_LU\_SA) of TXTDT\_LU are recorded; and

(c) text data language unit (TXTDT\_LU) 315c.

Furthermore, as shown in FIG. 13, the text data language unit (TXTDT\_LU) 315c comprises:

(a) text data language unit information (TXTDT\_LUI) 315c1 in which end address information (TXTDT\_LU\_EA) of TXTDT\_LU is recorded;

(b) an item text search pointer search pointer for volume (IT\_TXT\_SRP\_SRP\_VLM) 315c2 in which start address (IT\_TXT\_SRP\_SA\_VLM) information of IT\_TXT\_SRP for volume is recorded;

(c) an item text search pointer search pointer for title (IT\_TXT\_SRP\_SRP\_TT) 315c3 including start address (IT\_TXT\_SRP\_SA\_TT) information of IT\_TXT\_SRP for title; and

(d) text data (TXTDT) 315c4.

As shown in FIG. 14, in the text data (TXTDT) 315c4, various information is recorded:

(a) text data information (TXTDTI) 315c41 including information of the number (IT\_TXT\_SRP\_Ns) of IT\_TXT\_SRP;

(b) an item text search pointer (IT\_TXT\_SRP) 315c42 in which information of an item text identifier code (IT\_TXT\_IDCD) and start address (IT\_TXT\_SA) of IT\_TXT are recorded; and

(c) item text (IT\_TXT) 315c43.

As shown in FIG. 15, in the HD video manager menu cell address table (HDVMGM\_C\_ADT) 316 shown in FIG. 3, various information is recorded such as:

(a) HD video manager menu cell address table information (HDVMGM\_C\_ADTI) 316a including various information such as the number of VOBs (HDVMGM\_VOB\_Ns) in HDVMGM\_VOBS and the end address (HDVMGM\_C\_ADT\_EA) of HDVMGM\_C\_ADT; and

(b) HD video manager menu cell piece information (HDVMGM\_CPI) 316b in which information is recorded such as VOB\_ID number (HDVMGM\_VOB\_IDN) of HDVMGM\_CP, Cell\_ID number (HDVMGM\_C\_IDN) of HDVMGM\_CP, start address (HDVMGM\_CP\_SA) of HDVMGM\_CP, and end address (HDVMGM\_CP\_EA) of HDVMGM\_CP.

As shown in FIG. 16, in the HD video manager menu video object unit address map (HDVMGM\_VOBU\_ADMAP) 317 shown in FIG. 3, various information is recorded such as:

(a) HD video manager menu video object unit address map information (HDVMGM\_VOBU\_ADMAPI) 317a including information of the end address (HDVMGM\_VOBU\_ADMAP\_EA) of HDVMGM\_VOBU\_ADMAP; and

(b) the start address (HDVMGM\_VOBU\_SA) of HDVMGM\_VOBU.

FIG. 17 shows a management information content with respect to the HD menu AOB (HDMENU\_AOB), and shows the inner data structure of the HD menu audio object

set information table (HDMENU\_AOBSIT) 318 shown in FIG. 3, which exists in the HD video manager information region (HDVMGI) 31 shown in FIG. 1E.

In the HD menu audio object set information table

5 information (HDMENU\_AOBSITI) 318a arranged first in the HD menu audio object set information table

(HDMENU\_AOBSIT) 318, HDMENU\_AOB\_Ns which is AOB number information in HDMENU\_AOBS, and end address information (HDMENU\_AOBSIT\_EA) of HDMENU\_AOBSIT exist. In the

10 embodiment of the present invention, a plurality of types of audio objects (audio data) for the menu can be recorded in the information storage medium.

In FIG. 17, HD menu audio object information (HDMENU\_AOBI) 318b indicates the management information

15 on the audio object (audio data) for each menu, and comprises playback information (HDMENU\_AOB\_PBI) of HDMENU\_AOB; attribute information (HDMENU\_AOB\_ATR) of HDMENU\_AOB; start address information (HDMENU\_AOB\_SA) of HDMENU\_AOB #n (corresponding HDMENU\_AOB); and end  
20 address information (HDMENU\_AOB\_EA) of HDMENU\_AOB #n (corresponding HDMENU\_AOB).

In a data structure in the HD menu video object region (HDVMGM\_VOBS) 32 shown in FIG. 1E, integrated and stored in the HD\_VMG01.HDV file of FIG. 2, as shown  
25 in FIG. 18, menu screens (video objects) in which the same menu screen is recorded in different menu description language codes are arranged.

In the embodiment of the present invention, a plurality of types of audio objects (audio data) for the menu can be recorded in the information storage medium. As described above, the recording place of the audio object (AOB) for the menu is the HD menu audio object region (HDMENU\_AOBS) 33 in the HD video manager recording region (HDVMGI) 30 as shown in FIG. 1D. This HD menu audio object region (HDMENU\_AOBS) 33 constitutes one file named HD\_MENU0.HDA as shown in FIG. 2. The respective audio objects (AOB) for the menu are arranged/recorded in order in the HD menu audio object region (HDMENU\_AOBS) 33 constituting one file named HD\_MENU0.HDA as shown in FIG. 19.

The HD video title set information region (HDVTSI) 41 shown in FIG. 1E is integrated and recorded in the VTS00100.IFO file shown in FIG. 2, and is, as shown in FIG. 20, divided into regions (management information groups) such as an HD video title set information management table (HDVTSI\_MAT) 410; HD video title set PTT search pointer table (HDVTS\_PPT\_SRPT) 411; HD video title set program chain information table (HDVTS\_PGCIT) 412; HD video title set menu PGCI unit table (HDVTSM\_PGCI\_UT) 413; HD video title set time map table (HDVTS\_TMAPT) 414; HD video title set menu cell address table (HDVTSM\_C\_ADT) 415; HD video title set menu video object unit address map (HDVTSM\_VOBU\_ADMAP) 416; HD video title set cell address table (HDVTS\_C\_ADT) 417;

and HD video title set video object unit address map  
(HDVTS\_VOBU\_ADMAP) 418.

The management information common to the  
corresponding video title set is recorded in the HD  
5 video title set information management table  
(HDVTSI\_MAT) 410. The common management information is  
arranged in the first region (management information  
group) of the HD video title set information region  
(HDVTSI) 41, therefore, the common management  
10 information in the video title set is immediately read.  
A reproduction control process of the information  
reproduction device is simplified, and a control  
process time is shortened.

The management information on the graphic unit  
15 included in HDVTS (HD video title set of the present  
invention) is recorded in the HD video title set  
information management table (HDVTSI\_MAT) 410 (see  
FIG. 20) arranged in the first region (group) in the HD  
video title set information region (HDVTSI) 41 shown in  
20 FIG. 1E. As shown in FIG. 21, in a concrete management  
information content of the HD video title set  
information management table (HDVTSI\_MAT) 410, graphic  
unit stream number information and attribute  
information are divided into a menu screen and title  
25 (display video) in HDVTS. The information is recorded  
as HDVTSM graphic unit stream number information  
(HDVTSM\_GUST\_Ns), HDVTSM graphic unit stream attribute



information (HDVTSM\_GUST\_ATR), HDVTS graphic unit stream number information (HDVTS\_GUST\_Ns), and HDVTS graphic unit stream attribute table information (HDVTS\_GUST\_ATRT).

5           Moreover, in addition to the common management information in the video title set, as shown in FIG. 21, various information are recorded in the HD video title set information management table (HDVTSI\_MAT) 410 such as an HD video title set  
10   identifier (HDVTS\_ID); an HDVTS end address (HDVTS\_EA); an HDVTSI end address (HDVTSI\_EA); a version number (VERN) of HD-DVD video standards; an HDVTS category (HDVTS\_CAT); an HDVTSI\_MAT end address (HDVTSI\_MAT\_EA); an HDVTSM\_VOBS start address (HDVTSM\_VOBS\_SA);  
15   an HDVTSTT\_VOBS start address (HDVTSTT\_VOBS\_SA); an HDVTS\_PTT\_SRPT start address (HDVTS\_PTT\_SRPT\_SA); an HDVTS\_PGCIT start address (HDVTS\_PGCIT\_SA); an HDVTSM\_PGCI\_UT start address (HDVTSM\_PGCI\_UT\_SA); an HDVTS\_TMAP start address (HDVTS\_TMAP\_SA);  
20   an HDVTSM\_C\_ADT start address (HDVTSM\_C\_ADT\_SA); an HDVTSM\_VOBU\_ADMAP start address (HDVTSM\_VOBU\_ADMAP\_SA); an HDVTS\_C\_ADT start address (HDVTS\_C\_ADT\_SA); an HDVTS\_VOBU\_ADMAP start address (HDVTS\_VOBU\_ADMAP\_SA); HDVTSM video attributes (HDVTSM\_V\_ATR); an HDVTSM audio  
25   stream number (HDVTSM\_AST\_Ns); HDVTSM audio stream attributes (HDVTSM\_AST\_ATR); a start address (HDVTSM\_SPST\_Ns) of an HDVTSM sub-picture stream

number; HDVTSM sub-picture stream attributes  
(HDVTSM\_SPST\_ATR); HDVTS video attributes  
(HDVTS\_V\_ATR); an HDVTS audio stream number  
(HDVTS\_AST\_Ns); an HDVTS audio stream attribute table  
5 (HDVTS\_AST\_ATRT); an HDVTS sub-picture stream number  
(HDVTS\_SPT\_Ns); an HDVTS sub-picture stream attribute  
table (HDVTS\_SPST\_ATRT); and an HDVTS multi-channel  
audio stream attribute table (HDVTS\_MU\_AST\_ATRT).

The data structure in the HD video title set PTT  
10 search pointer table (HDVTS\_PPT\_SRPT) 411 shown in  
FIG. 20 is shown in FIG. 22. The HD video title set  
PTT search pointer table (HDVTS\_PPT\_SRPT) 411 comprises  
various information such as:

(a) PTT search pointer table information  
15 (PTT\_SPRTI) 411a including the information such as the  
number (HDVTS\_TTU\_Ns) of HDVTS\_TTUs and an end address  
(HDVTS\_PTT\_SRPT\_EA) of HDVTS\_PTT\_SRPT;

(b) a title unit search pointer (TTU\_SRP) 411b in  
which the information of the start address (TTU\_SA) of  
20 TTU is recorded; and

(b) a PTT search pointer (PTT\_SRP) 411c including  
the information of a program chain number (PGCN) and  
program number (PGN).

In a place where the information for managing  
25 resume information is arranged in the first embodiment  
of the present invention, as shown in FIGS. 23 and 24,  
the RSM permission flag (update permission flag of

resume information) is arranged in the HDVTS\_PGC category in the HDVTS\_PGC search pointer 412.

The information of the HDVTS\_PGC search pointer 412 is arranged in the HD video title set program chain

5 information table (HDVTS\_PGCIT) 412 shown in FIG. 20, existing in the HD video title set information region (HDVTSI) 41 shown in FIG. 1F. Further in the HD video title set program chain information table (HDVTS\_PGCIT) 412, as shown in FIG. 23, the information of HD video  
10 title set PGC information table (HDVTS\_PGCITI) 412a including the information of the number (HDVTS\_PGC\_SRP\_Ns) of HDVTS\_PGC\_SRP and the end address (HDVTS\_PGCIT\_EA) of HDVTS\_PGCIT is recorded. Moreover, the information of the start address  
15 (HDVTS\_PGC\_SA) of HDVTS\_PGC is also recorded in the HDVTS\_PGC search pointer (HDVTS\_PGC\_SRP) 412b together with the above-described HDVTS\_PGC category (HDVTS\_PGC\_CAT).

The RSM permission flag shown in FIG. 24 (update  
20 permission flag of the resume information) designates whether or not the contents of the resume information are updated (resume information is successively updated in accordance with a reproduction situation of the corresponding PGC) in a stage in which the reproduction  
25 of the corresponding HDVTS\_PGC is started. That is, when the flag is "0b", the resume information is updated. When the flag is "1b", the resume information

is not updated, and the reproduction interrupted  
information of HDVTS\_PGC reproduced before  
(the corresponding program chain in the HD video title  
set of the present invention) is held. Further in the  
5 HDVTS\_PGC category (HDVTS\_PGC\_CAT), entry type  
information for judging entry PGC, title number  
information in the video title set (VTS) indicated by  
the corresponding PGC, block mode information, block  
type information, and PTL\_ID\_FLD information are  
10 recorded.

The data structure in the HD video title set menu  
PGCI unit table (HDVTSM\_PGCI\_UT) 413 shown in FIG. 20  
is shown in FIG. 25. The HD video title set menu PGCI  
unit table (HDVTSM\_PGCI\_UT) 413 comprises various  
15 information such as:

(a) HD video title set menu program chain  
information unit table information (HDVTSM\_PGCI\_UTI)  
413a including information such as the number  
(HDVTSM\_LU\_Ns) of HD video title set menu language  
20 units and the end address (HDVTSM\_PGCI\_UT\_EA) of  
HDVTSM\_PGCI\_UT;

(b) an HD video title set menu language unit  
search pointer (HDVTSM\_LU\_SRP) 413b in which  
information is recorded such as an HD video title set  
25 menu language code (HDVTSM\_LCD), presence/absence of HD  
video title set menu (HDVTSM\_EXST), and the start  
address (HDVTSM\_UT\_SA) of HDVTSM\_LU; and

(c) an HD video title set menu language unit  
(HDVTSM\_LU) 413c.

Moreover, as shown in FIG. 26, the data structure  
in the HD video title set menu language unit

5 (HDVTSM\_LU) 413c comprises:

(a) HD video title set menu language unit  
information (HDVTSM\_LUI) 413c1 including the  
information such as the number (HDVTSM\_PGCI\_SRP\_Ns) of  
HDVTSM\_PGCI\_SRP and the end address (HDVTSM\_LU\_EA) of  
10 HDVTSM\_LU;

(b) HD video title set menu program chain  
information (HDVTSM\_PGCI) 413c3 including the same data  
structure as that of FIG. 33 or 34; and

(c) an HDVTSM\_PGCI search pointer  
15 (HDVTSM\_PGCI\_SRP) 413c2 in which the information is  
recorded such as an HDVTSM\_PGC category  
(HDVTSM\_PGC\_CAT) and the start address (HDVTSM\_PGCI\_SA)  
of HDVTSM\_PGCI.

A place where information to refer to (designate)  
20 the HD menu AOB (HDMENU\_AOB) is set with respect to the  
menu by an HDVTS unit in the first embodiment of the  
present invention is the HDVTSM\_PGC category  
information (HDVTSM\_PGC\_CAT) in the HDVTS\_PGCI search  
pointer #n (HDVTSM\_PGCI\_SRP #n) 413c2 as shown in  
25 FIG. 26. The audio information number (HDVTSM\_PGC\_CAT)  
in the HDVTSM\_PGC category information shown in FIG. 27  
means an audio information number (AOB number) which

designates AOB number #n to be reproduced in  
HDMENU\_AOBS (the corresponding AOB number in AOBs  
(HDMENU\_AOB) for the menu arranged in FIG. 19).

The audio information selection means the selection  
5 information of the audio information to be reproduced  
simultaneously with the screen display of the menu of  
the HD content in the present invention, and the audio  
information selection flag (audio information  
selection) indicating the start/end trigger information  
10 of the audio information reproduction.

Here, when the audio information selection flag  
(audio information selection) "00b" is selected, the  
audio data recorded in each video object for the menu  
is reproduced, and the sound reproduction is  
15 interrupted at the switching time of the menu. When  
the audio information selection flag (audio information  
selection) "10b" or "11b" is selected, the audio data  
of the HD menu AOB (HDMENU\_AOB) existing in the HD menu  
audio object region (HDMENU\_AOBS) 33 is reproduced. To  
20 reproduce the audio data for the menu (AOB), when "11b"  
is designated, the reproduction of the audio data is  
started from the beginning every change of the menu  
screen. When "10b" is designated, the reproduction of  
the audio data is continued regardless of the switching  
25 of the menu screen. In the embodiment of the present  
invention, as shown in FIG. 19, a plurality of types of  
AOBs (HDMENU\_AOB) for the menu are stored beforehand in

the HD menu audio object region (HDMENU\_AOBS) 33.

The audio information number shown in FIG. 27 indicates the selection information of the HD menu AOB

(HDMENU\_AOB) to be reproduced simultaneously with the display of the corresponding PGC for the menu display. The AOB is selected from the AOBs for the menu arranged in FIG. 19 by number information indicating "the number of AOB to be selected from above" which is selection information of the HD menu AOB. Further in the

HDVTSM\_PGC category (HDVTSM\_PGC\_CAT), the entry type information for judging the entry PGC, menu ID information indicating the identification of the menu (e.g., the menu of the title or the like), block mode information, block type information, and PTL\_ID\_FLD information are recorded.

The data structure in the HD video title set time map table (HDVTS\_TMAPT) 414 shown in FIG. 20 is shown in FIG. 28. The HD video title set time map table (HDVTS\_TMAPT) 414 comprises:

(a) HD video title set time map table information (HDVTS\_TMAPTI) 414a in which various information is recorded such as the number (HDVTS\_TMAP\_Ns) of HDVTS\_TMAP and the end address (HDVTS\_TMAPT\_EA) of HDVTS\_TMAPT;

(b) an HD video title set time map search pointer (HDVTS\_TMAP\_SRP) 414b including the information of the start address (HDVTS\_TMAP\_SA) of HDVTS\_TMAP; and

(c) an HD video title set time map (HDVTS\_TMAP) 414c in which various information is recorded such as a length (TMU) of a time unit (second) constituting a standard in map entry, the number of map entries  
5 (MAP\_EN\_Ns), and map entry (MAP\_EN).

The HD map entry (HDMAP\_EN) comprises a "discontinuous flag" indicating a flag for judging whether or not the corresponding HDMAP\_ENA and the next HDMAP\_ENA exist in the same cell; and start address  
10 information (HDMAP\_ENA) of VOBu including a playback time corresponding to the corresponding HD map entry (HDMAP\_EN).

Moreover, as shown in FIG. 29, the data structure in the HD video title set menu cell address table  
15 (HDVTSM\_C\_ADT) 415 shown in FIG. 20 comprises:

(a) HD video title set menu cell address table information (HDVTSM\_C\_ADTI) 415a including information such as the number (HDVTSM\_VOB\_Ns) of VOBs in HDVTSM\_VOBS and the end address (HDVTSM\_C\_ADT\_EA) of  
20 HDVTSM\_C\_ADT; and

(b) HD video title set menu cell piece information (HDVTSM\_CPI) 415b in which various information is recorded such as VOB\_ID number (HDVTSM\_VOB\_IDN) of HDVTSM\_CP, Cell\_ID number (HDVTSM\_C\_IDN) of HDVTSM\_CP,  
25 start address (HDVTSM\_CP\_SA) of HDVTSM\_CP, and end address (HDVTSM\_CP\_EA) of HDVTSM\_CP.

As shown in FIG. 30, the HD video title set menu



video object unit address map (HDVTSM\_VOBU\_ADMAP) 416 shown in FIG. 20 comprises information such as:

(a) HD video title set menu video object unit address map information (HDVTSM\_VOBU\_ADMAPI) 416a in

5 which the information of the end address

(HDVTSM\_VOBU\_ADMAP\_EA) of HDVTSM\_VOBU\_ADMAP; and

(b) HD video title set menu video object unit address (HDVTSM\_VOBU\_AD) 416b including the information of the start address (HDVTSM\_VOBU\_SA) of HDVTSM\_VOBU.

10 Moreover, the data structure in the HD video title set cell address table (HDVTS\_C\_ADT) 417 shown in FIG. 20 is shown in FIG. 31. The HD video title set cell address table (HDVTS\_C\_ADT) 417 comprises various information such as:

15 (a) HD video title set cell address table information (HDVTS\_C\_ADTI) 417a including information of the number (HDVTS\_VOB\_Ns) of VOBs in HDVTS\_VOBS and the end address (HDVTS\_C\_ADT\_EA) of HDVTS\_C\_ADT; and

(b) HD video title set cell piece information  
20 (HDVTS\_CPI) 417b including various information such as VOB\_ID number (HDVTS\_VOB\_IDN) of HDVTS\_CP, Cell\_ID number (HDVTS\_C\_IDN) of HDVTS\_CP, start address (HDVTS\_CP\_SA) of HDVTS\_CP, and end address (HDVTS\_CP\_EA) of HDVTS\_CP.

25 Furthermore, the data structure in the HD video title set video object unit address map (HDVTS\_VOBU\_ADMAP) 418 shown in FIG. 20 is shown in

FIG. 32. The HD video title set video object unit address map (HDVTS\_VOBU\_ADMAP) 418 comprises various information such as:

(a) HD video title set video object unit address map information (HDVTS\_VOBU\_ADMAPI) 418a including information of the end address (HDVTS\_VOBU\_ADMAP\_EA) of HDVTS\_VOBU\_ADMAP; and

(b) HD video title set video object unit address (HDVTS\_VOBU\_AD) 418b in which information of start address (HDVTS\_VOBU\_SA) by an HDVTS\_VOBU unit.

RSM permission flag information which realizes the subject matter (A) and the audio information selection flag/audio information number which realize the subject matter (F) are arranged in the search pointer information of program chain information PGCI as shown in FIGS. 22, 7, 24 in the first embodiment of the present invention. The present invention is not limited to this embodiment, and they may also be arranged in PGCI itself. Another embodiment (second embodiment) of the present invention is shown in FIGS. 33 and 34. The PGCI information shown in FIGS. 33 and 34 correspond to:

[a] the HD video manager menu program chain information (HDVMGM\_PGCI) 312c3 shown in FIG. 7 concerning the HD video manager menu language unit (HDVMGM\_LU) 312c of FIG. 6 existing in the HD video manager menu PGCI unit table (HDVMGM\_PGCI\_UT) 312

(FIG. 3) in the HD video manager information region (HDVMGI) 31 of FIG. 1E;

[b] the HD video title set menu program chain information (HDVTSM\_PGCI) 413c3 shown in FIG. 26 and  
5 arranged in the HD video title set menu language unit (HDVTSM\_LU) 413c in FIG. 25 in the HD video title set menu PGCI unit table (HDVTSM\_PGCI\_UT) 413 in FIG. 20 showing the data structure in the HD video title set information region (HDVTSI) 41 of FIG. 1F; and

10 [c] HDVTS\_PGCI 412c (FIG. 23) in the HD video title set program chain information table (HDVTS\_PGCIT) 412 in FIG. 20 showing the data structure in the HD video title set information region (HDVTSI) 41 of FIG. 1F (the PGCI information shown in FIGS. 33 and 34  
15 may be arranged in three places [a] to [c])).

As shown in FIGS. 33 and 34, the program chain information (PGCI) comprises five regions (five management information groups) including program chain general information (PGC\_GI) 50; program chain command  
20 table (PGC\_CMDT) 51; program chain program map (PGC\_PGMAP) 52; cell playback information table (C\_PBIT) 53; and cell position information table (C\_POSIT) 54.

As shown in FIGS. 33 and 34, RSM&AOB category  
25 information (RSM&AOB\_CAT) is recorded in the last of the program chain general information (PGC\_GI) 50 arranged in the first region (management information

group) in PGC. RSM permission flag information, audio information selection flag, and audio information number exist in RSM&AOB category information (RSM&AOB\_CAT). This RSM permission flag information means the same content as that described in FIG. 24. The contents of the audio information selection flag and audio information number match those described in FIG. 8 or 27. Further in the RSM&AOB category information (RSM&AOB\_CAT), the entry type information for judging the entry PGC, block mode information, block type information, and PTL\_ID\_FLD information are recorded.

As shown in FIGS. 33 and 34, the information in the PGC graphic unit stream control table (PGC\_GUST\_CTLT) in which the control information on the stream of the graphic units to be arranged in the PGC is recorded is individually recorded in separate regions in accordance with four types of images (16:9 HD image, 16:9 SD image, 4:3 SD image, and letter boxed SD image). The separate regions are PGC\_GUST\_CTL (PGC\_GUST #0) region of a graphic unit stream #0 for HD; PGC\_GUST\_CTL (PGC\_GUST #1) region of a graphic unit stream #1 for SD wide; PGC\_GUST\_CTL (PGC\_GUST #2) region of a graphic unit stream #2 for 4:3 (SD); and PGC\_GUST\_CTL (PGC\_GUST #3) region of a graphic unit stream #3 for letter box (SD).

In addition to the above-described information,

further in the program chain general information (PGC\_GI) 50, various information is recorded such as PGC content (PGC\_CNT); PGC playback time (PGC\_PB\_TM); PGC user operation control (PGC\_UOP\_CTL); PGC audio stream control table (PGC\_AST\_CTLT); PGC sub-picture stream control table (PGC\_SPST\_CTLT); PGC navigation control (PGC\_NV\_CTL); PGC sub-picture palette (PGC\_SP\_PLT); start address (PGC\_CMDT\_SA) of PGC\_CMDT; start address (PGC\_PGMAP\_SA) of PGC\_PGMAP; start address (C\_PBIT\_SA) of C\_PBIT; and start address (C\_POSIT\_SA) of C\_POSIT.

The command information adapted for each PGC is integrated and arranged in the program chain command table (PGC\_CMDT) 51 as shown in FIG. 35. Places where the PGC information is arranged may be three places [a] to [c] as described in the description of the places with reference to FIGS. 33 and 34. The resume sequence information described in [Point 4] described in the subject matter (A) is recorded in the program chain command table (PGC\_CMDT) 51 as shown in FIG. 35. The information content of the resume sequence information in the embodiment of the present invention (resume (RSM) command sequence clearly described with reference to FIG. 35) is described in a form in which the RSM commands (RSM\_CMD) 514 are successively arranged in this region. The RSM command (RSM\_CMD) 514 described in a column in FIG. 35 means a command which

can be designated in the HD DVD video content in the present invention, and the RSM commands (RSM\_CMD) 514 arranged in the resume (RSM) command sequence region are continuously (sequentially) executed in order from above.

In the embodiment of the present invention, the arrangement of cell commands (C\_CMD) 513 described in FIG. 35 also means a sequential command series. That is, it is meant that the command processes are successively executed from above in accordance with the arrangement order of the cell commands (C\_CMD) 513 shown in FIG. 35. As described with reference to FIG. 36, a part of a cell command process procedure (first cell command number to start the sequential process of the cell command and execution range of the sequential process of the cell command for each cell) can be designated for each cell.

The RSM command (RSM\_CMD) 514 indicates a part of the command procedure to be executed "immediately before the reproduction from halfway in PGC" whose reproduction is interrupted before, after returning to the corresponding PGC (e.g., from the menu screen). On the other hand, a pre-command (PRE\_CMD) 511 means a command to be executed "immediately before reproducing the corresponding PGC from the beginning". The command executed after reproducing the corresponding PGC is a post-command (POST\_CMD) 512. In FIG. 35, the numbers

of pre-commands (PRE\_CMD) 511, post-commands (POST\_CMD) 512, cell commands (C\_CMD) 513, and RSM commands (RSM\_CMD) 514 which can be arranged in one program chain command table (PGC\_CMDT) 51 can be freely set (any of the numbers of commands described above may also be "0"). Additionally, in the embodiment of the present invention, an upper limit of a total value of added numbers of pre-commands (PRE\_CMD) 511, post-commands (POST\_CMD) 512, cell commands (C\_CMD) 513, and RSM commands (RSM\_CMD) 514 which can be arranged in one program chain command table (PGC\_CMDT) 51 is defined as 1023. Therefore, for example, when all the numbers of pre-commands (PRE\_CMD) 511, post-commands (POST\_CMD) 512, and RSM commands (RSM\_CMD) 514 are 0, the number of cell commands (C\_CMD) 513 may be set to 1023 at maximum.

As shown in FIG. 36, number information PRE\_CMD\_Ns of pre-commands (PRE\_CMD) 511, number information POST\_CMD\_Ns of post-commands (POST\_CMD) 512, number information C\_CMD\_Ns of cell commands (C\_CMD) 513, and number information RSM\_CMD\_Ns of RSM commands (RSM\_CMD) 514 which can be arranged in one program chain command table (PGC\_CMDT) 51 are recorded in the program chain command table information (PGC\_CMDTI) 510.

A concrete data structure in the RSM command (RSM\_CMD) 514 recorded in the program chain command table (PGC\_CMDT) 51 will be described hereinafter.

Here, the concrete data structure in the RSM command (RSM\_CMD) 514 will be described. The data structures in the pre-command (PRE\_CMD) 511, post-command (POST\_CMD) 512, and cell command (C\_CMD) 513 are also  
5 the same as the concrete data structure in the RSM command (RSM\_CMD) 514. In the concrete data structure in the RSM command (RSM\_CMD) 514, as shown in FIG. 36, a region for eight bytes is only allocated to each command. The contents of command are recorded in the  
10 region for eight bytes. In any command, three bits from the MSB of eight bytes enter data of "command ID-1". The contents of data of and after the three bits from the MSB differs with the value of the "command type", but the contents have information such  
15 as "I-flag for comparison" and "Compare Field" in common regardless of the command type.

Detailed structures of the program chain program map (PGC\_PGMAP) 52 and cell position information table (C\_POSIT) 54 arranged in program chain information  
20 (PGCI) are shown in FIG. 37.

Entry cell number 520 for program information in which an entry cell number (EN\_CN) is recorded in accordance with each entry is arranged in the program chain program map (PGC\_PGMAP) 52, and the number of  
25 pieces of information corresponding to the number of entry numbers are arranged. The cell position information table (C\_POSIT) 54 has a structure in which



cell position information (C\_POSI) 540 comprising a set of VOB ID number (C\_VOB\_IDN) and cell ID number (C\_IDN) of the cell is arranged in order.

It has been described with reference to FIG. 35 that a part of the cell command process procedure (the first cell command number to start the sequential process of the cell command and an execution range of the sequential process of the cell command for each cell) can be designated for each cell in a series of cell command process procedure designated to the cell command #k (C\_CMD #k) 513 from cell command #1 (C\_CMD #1) 513. Execution range information of the sequential process of the cell command which can be set for each cell is shown in FIG. 38. The places where the PGCI information is recorded may be three places [a] to [c] as in the description of the places with reference to FIGS. 33 and 34. As shown in FIG. 38, the management information on the individual cells constituting the PGC is recorded in cell playback information (C\_PBI) 530 in the cell playback information table (C\_PBIT) 53 in the PGCI which is the management information of the corresponding PGC.

In a series cell command process procedure designated to the cell command #k (C\_CMD #k) 513 from the cell command #1 (C\_CMD #1) 513 shown in FIG. 35, the information on the first cell command number to start the sequential process of the cell command

specified for each cell is recorded in cell command start number information (C\_CMD\_SN) in the cell playback information (C\_PBI) 530 as shown in FIG. 38. Moreover, cell command continuous number information

5 (C\_CMD\_C\_Ns) indicating a command number to execute the command process continuously is recorded in the cell playback information (C\_PBI) 530, including the cell command (C\_CMD) 513 designated by the cell command start number information (C\_CMD\_SN). The execution  
10 range of the sequential process of the cell command executed by the corresponding cell is specified from both information. In the embodiment of the present invention, after ending the reproduction of the corresponding cell, a series of command procedure  
15 (command sequence) is executed in a range designated by the cell command start number information (C\_CMD\_SN) and cell command continuous number information (C\_CMD\_C\_Ns) of FIG. 38.

Moreover, in the cell playback information (C\_PBI)  
20 530, information is recorded such as: a cell category (C\_CAT) indicating whether the corresponding cell constitutes the interleaved block corresponding to the multi-angle or constitutes a part of a general continuous block, or corresponds to a top or last cell  
25 of the interleaved block in a case where the cell constitutes a part of the interleaved block for the multi-angle; a cell playback time (C\_PBTM) indicating

a playback time required at the time of the reproduction of the corresponding whole cell; start address position information of first VOB of the cell (C\_FVOBU\_SA); end address position information of first ILVU of the cell (C\_FILVU\_EA); start address position information of last VOB of the cell (C\_LVOBU\_SA); and end address position information of last VOB of the cell (C\_LVOBU\_EA).

FIGS. 39A, 39B, 39C, and 39D shows a structure in which a graphic unit GU of the present embodiment is stored as an MPEG program stream. As shown in FIG. 39A, a video object (VOB) a1 comprises a plurality of video object units (VOBU) a2 shown in FIG. 39B. As shown in FIG. 39C, the VOBU comprises the MPEG program stream having a plurality of different data packs such as a navigation pack a3, video pack a4, graphic unit (GU) pack a5, audio pack a6, and sub-picture (SP) pack a7. As shown in FIG. 39D, by five different display types (HD, SD wide, 4:3, letter box, and pan scan), the GU packs a5 are stored as streams such as a graphic unit stream #1 for HD (a51), an SD wide graphic unit stream #2 (a52), a graphic unit stream #3 for 4:3 (a53), a graphic unit stream #4 for letter box (a54), and a graphic unit stream #5 for pan scan (a55). These streams are appropriately selected/switched in accordance with display conversion with respect to a display type of a main picture or a display device

which is an output destination, and a user does not directly switch the stream.

FIG. 40 shows a stream ID and a sub-stream ID allocated to each stream of the graphic unit GU. Each stream has a stream ID of a private stream 1 (1011 1101b), and has a sub-stream ID (0101 0xxx b) in order to identify a graphic unit stream. Furthermore, to identify the display type, (0101 0001b) for HD, (0101 0010b) for SD wide, (0101 0011b) for 4:3, (0101 0100b) for letter box, and (0101 0101b) for pan scan are defined.

FIG. 41 shows an example of a data structure of the graphic unit GU having mask data. As shown in the figure, payload data of a plurality of GU packs a5 are connected to one another to constitute a graphic unit GU. In FIG. 41, additional data such as a pack header and a padding packet are not described. The graphic unit GU roughly comprises header information b1, highlight information (HLI) b2, one or more mask data b3 corresponding to one or more pieces of button information b23, and graphic data b4. Here, detailed contents of the highlight information (HLI) b2 will be described (the remainder will be described later). The highlight information b2 comprises general information b21, color palette information b22, and one or more pieces of button information b23. The color palette information b22 designates a button color on the menu,

and includes a usual color palette b221 designated to a non-highlighted button color; a color palette b222 for selection designated in a highlight-selected button color by user's input selection of arrow keys; and a  
5 color palette b223 for activation which is designated to an activation color from a selected color, when the user activates the highlight-selected button. The button information b23 includes a start address b231 of the mask data indicating a button shape; a size b232 of  
10 the mask data; adjacent button position information b233 which is information for moving the button to an adjacent front/rear/left/right button by user input; and a button command b234 executed when the button is activated. In this button command, a command sequence  
15 can be constituted in which one or more commands are continuously arranged, and eight commands at maximum can be arranged in the present embodiment. When the button is activated, one to eight commands are continuously executed, and it is accordingly possible  
20 to execute a composite process such as setting and branching at once.

FIG. 42 shows another example of the data structure of the graphic unit having the mask data of FIG. 41. As shown in FIG. 42, unlike FIG. 41, the  
25 highlight information (HLI) b2 comprises general information b21, color palette information b22, mask data search information b24 corresponding to one or

more pieces of button information described later,  
and one or more pieces of button information b23.

The color palette information b22 designates a button  
color on the menu, and includes: a usual color palette

5 b221 designated to a non-highlighted button color; a  
color palette b222 for selection designated in a  
highlight-selected button color by user's input

selection of arrow keys; and a color palette b223 for  
activation which is designated to an activation color  
10 from a selected color, when the user determines the  
highlight-selected button. The mask data search  
information b24 includes a start address b241 of the  
mask data, and a size b242 of the mask data.

Furthermore, the button information b23 includes  
15 adjacent button position information b233 which is  
information for moving the button to an adjacent  
front/rear/left/right button by user input; and a  
button command b234 executed when the button is  
activated. In this button command, a command sequence  
20 can be constituted in which one or more commands are  
continuously arranged, and eight commands at maximum  
can be arranged in the present embodiment. When the  
button is activated, one to eight commands are  
continuously executed, and it is accordingly possible  
25 to execute a composite process such as setting and  
branching at once.

FIGS. 43A and 43B shows contents of header

information b1 and general information b21. The header information b1 includes: a graphic unit size (GU\_SZ) indicating a size of the whole graphic unit; attribute information (GU\_ATRI) of the graphic unit such as  
5 graphic data stored in the graphic unit, resolutions of the mask pattern (1920×1080, 1440×1080, 1280×720), aspect ratio (16:9, 4:3), and display type (HD, SD wide, 4:3, pan scan, letter box); start address (HLI\_SA) of the highlight information (HLI); and start  
10 address (GD\_SA) of the graphic data.

Moreover, the general information b21 includes: a playback start time (GU\_PB\_S\_PTM) of the graphic unit having the same value as that of a presentation time stamp (PTS) included in the header of the graphic unit  
15 (GU) pack a5; and a playback end time (GU\_PB\_E\_PTM) of the graphic unit. A display time of the graphic unit and an effective time (both start/end times are completely coincident) when execution (of the command) is possible are set using this PTS information or  
20 playback start time (GU\_PB\_S\_PTM) and playback end time (GU\_PB\_E\_PTM) information of the graphic unit. Since PTS/PTM is used in start/end time information, it is possible to set a time range with a very high precision. When the menu extends over a plurality of  
25 screens, the general information includes: a button offset number (BTN\_OFN) which gives a start number of the button in the menu screen; a button number (BTN\_Ns)

in the menu screen; the number (NSL\_BTN\_Ns) of number  
selection buttons indicating the number of buttons  
which can be selected by number input; a number  
(FOSL\_BTNN) of a forced selection button for  
5 intentionally bringing an optional button number into  
a selected state in a case where the menu screen is  
displayed; and a number (FOAC\_BTNN) of a forced  
activation button indicating a forcibly activated  
button number after elapse of a time zone which can be  
10 selected by the user.

FIG. 44 shows data stored in the graphic unit.  
An image stored in the mask data b3 is shown above on  
the right, and the mask data is a mask (button) pattern  
comprising one bit/one pixel. Each mask data  
15 corresponds to the button on the menu screen. The data  
stored in the graphic data is shown below on the right,  
and the graphic data is a 256 color graphic pattern  
comprising eight bits/one pixel.

FIG. 45 shows an example of video synthesis  
20 including a mask pattern. In FIG. 45, a video  
synthesis output (D) comprises three planes of  
a main picture (A), graphic pattern (B), and mask  
pattern (C), and data of the main picture (A) + graphic  
pattern (B) + mask pattern (C) are superposed upon each  
25 other to synthesize video. In the mask plane, buttons  
selected from buttons of (1) to (3) are superposed upon  
one another. In FIG. 45, the video synthesis output



(D) indicates a selected state of the mask (button) pattern of (1). The data of the graphic pattern (B) and mask pattern (C) are stored in the graphic unit GU.

FIG. 46 shows an example of a color/contrast information table stored in color palette information b22. A left end shows an example of the usual color palette b221, middle shows an example of the color palette b222 for selection, and a right end shows an example of the color palette b223 for activation. Each example comprises a 256 color/contrast table of "00h" to "FFh", and is represented by four bytes in total including eight bits of color data and contrast data of eight bits of red (R), green (G), and blue (B). In the example of FIG. 46, an elliptic button portion of the graphic data is "80h", a star-shaped button portion is "C7h", and a background portion is "FFh". In a button pixel portion of "80h", in the usual color palette b221, red (R: "FFh", G: "00h", B: "00h"), and translucent ("80h") are allocated. In the color palette b222 for selection, blue (R: "00h", G: "00h", B: "FFh"), and translucent ("80h") are allocated. In the color palette b223 for activation, green (R: "00h", G: "FFh", B: "00h"), and translucent ("80h") are allocated. Each background pixel portion of "FFh" comprises white (R: "FFh", G: "FFh", B: "FFh"), and transparent ("FFh").

FIG. 46 shows an example in which a place

corresponding to a "button portion" of superposed mask patterns changes to blue from red by the color palette for selection, and blue is further changed to green by user's button determination operation. Accordingly, button highlighting is executed by the user's selection operation on the menu screen, the user is allowed to grasp the selected button, the button highlighting by the user's determination operation is executed, and the user can be allowed to grasp the activated button.

FIG. 47 shows bit definition of the mask data b3 of one bit/one pixel stored in the graphic unit GU. When a value of the bit is "1b", the selection (color, contrast) or activation (color, contrast) designated by the graphic pattern is displayed. When the bit value is "0b", the background (usual (color, contrast) of main picture plane or graphic plane is displayed) transmits light.

FIG. 48 shows an information reproduction device (player) which reads and reproduces information stored in a disc-shaped information storage medium 1. That is, the information storage medium 1 is attached to a disk drive 101. The disk drive 101 rotates/drives the attached information storage medium 1, and reads the information stored in the information storage medium 1 using an optical pickup (not shown).

The information read by the disk drive 101 is supplied to a data processor 102, subjected to an error

correction process, and stored in a track buffer (not shown) in the data processor 102. Moreover, in the information stored in the track buffer, management information of the HD video manager information region 31 and HD video title set information region 41 are  
5 recorded in a memory 122, and used in reproduction control, data management or the like. In the information stored in the track buffer, the information of the video object regions 32, 42, 43 are transferred  
10 to a separation unit 103, and separated for each of the video pack a4, graphic unit pack a5, audio pack a6, and sub-picture pack a7. The information of the video pack a4 is supplied to a video decoder unit 111, the information of the sub-picture pack a7 is supplied to a  
15 sub-picture decoder unit 112, the information of the graphic unit pack a5 is supplied to a graphic decoder unit 113, the information of the audio pack a6 is supplied to an audio decoder unit 114, and a decode process is performed.

20 Main picture information decoded in the video decoder unit 111, sub-picture information decoded in the sub-picture decoder unit 112, and graphic information decoded in the graphic decoder unit 113 are supplied to a video processor 104, and subjected to a  
25 superimposition process. Thereafter, the information is converted to analog information in a digital/analog (D/A) converter 132, and output as an image signal to

an image display device (e.g., cathode ray tube: CRT, etc.) (not shown). Audio information decoded in the audio decoder unit 114 is converted to the analog information in a D/A converter 133, and output as  
5 an audio signal to an audio reproduction device (e.g., a speaker, etc.) (not shown).

A series of reproduction operation with respect to the information storage medium 1 is generally controlled by a micro processing unit (MPU) 121. The  
10 MPU 121 receives operation information from a key input device 131 to control each unit based on program stored in a read only memory (ROM) 123.

FIGS. 49, 50, 51 are explanatory views of model examples A, B, and C of a video system decoder block following the separation unit 103 of FIG. 48. The  
15 video decoder unit 111 comprises a video input buffer, video decoder, and video decoder buffer, and the video data decoded by the video decoder is sent to the video processor 104 in a subsequent stage. The sub-picture  
20 decoder unit 112 comprises a sub-picture unit input buffer, sub-picture decoder, and sub-picture decoder buffer, and the sub-picture data decoded in the sub-picture decoder is sent to the video processor 104 in the subsequent stage. The graphic decoder unit 113  
25 comprises: a graphic unit input buffer 113a which buffers the graphic unit pack a5 separated by the separation unit 103 and which is capable of storing at

least one graphic unit; a highlight decoder 113b which decodes the highlight information b2 and mask data b3 of the graphic unit stored in the input buffer 113a, and a highlight buffer 113c; and a graphic decoder 113e  
5 which decodes the graphic data b4 of the graphic unit stored in the input buffer 113a, and a graphic buffer 113f. Furthermore, the button pattern decoded by the highlight decoder 113b is mixed with the graphic data decoded by the graphic decoder 113e by a mixer 113d of  
10 the subsequent stage, subjected to palette selection 113g and highlight process 113h, and sent to the video processor 104.

FIG. 49 shows an example of decoder model "A" having the graphic decoder. In the decoder model "A",  
15 in the data decoded by each decoder described above, the video data, sub-picture data, and graphic data are mixed and superimposed by a mixer 104a in the video processor 104. Furthermore, when a connected display device is standard television (SDTV), the data is  
20 subjected to a down conversion process by a down converter 104b to output video.

FIG. 50 shows an example of decoder model B having the graphic decoder. In the decoder model B, in the data decoded by each decoder described above, the video  
25 data and graphic data are first mixed and superimposed by a first mixer 104a in the video processor 104. Thereafter, when a connected display device is standard

television (SDTV), the data is subjected to a down conversion process by a down converter 104b.

Furthermore, when the connected display device has an aspect ratio of 4:3, a letter box (LB)/pan scan (PS)

5 converter 104c subjects the data to a letter box or pan scan conversion process. Thereafter, in a second mixer 104d, the data is mixed with and superimposed upon sub-picture data corresponding to a display type (HD, SD wide, 4:3, pan scan, letter box) to output video

10 FIG. 51 shows an example of decoder model C having the graphic decoder. In the decoder model C, in the data decoded by each decoder described above, when a connected display device is standard television (SDTV), the data is first subjected to a down conversion  
15 process by a down converter 104b. Furthermore, when the connected display device has an aspect ratio of 4:3, a letter box/pan scan converter 104c subjects the data to a letter box or pan scan conversion process. Thereafter, in a subsequent-stage mixer 104a, the data  
20 is mixed with and superimposed upon sub-picture data and graphic data corresponding to a display type (HD, SD wide, 4:3, pan scan, letter box) to output video.

FIG. 52 shows another example having button position information in the data structure of the  
25 graphic unit GU shown in FIGS. 41 and 42. As shown in FIG. 52, the payload data of a plurality of graphic unit packs a5 are connected to one another to

constitute the graphic unit GU. In the drawing, additional data such as a pack header and padding packet is not described. The graphic unit GU roughly comprises header information e1, highlight information (HLI) e2, and graphic data e4, and does not have mask data e3. Here, detailed contents of the highlight information (HLI) e2 will be described (the header information e1 and color palette information e22 are the same as those of FIGS. 41 and 42).

The highlight information e2 comprises general information e21, color palette information e22, and one or more pieces of button information e23. The color palette information e22 gives a button color on the menu, and includes: a plurality of usual color palettes e221 designated to a non-highlighted button color; a plurality of color palettes e222 for selection designated in a highlight-selected button color by user's input selection of arrow keys; and a plurality of color palettes e223 for activation designated to an activation color from a selected color, when the user activates the highlight-selected button.

The button information e23 includes: used color palette information e231 which designates a plurality of color palette numbers for usual, selection, and activation; the number e232 of hot spot information of the button which gives a plurality of selectable positions (hot spots) with one piece of button

information on the menu screen; hot spot information  
e233 for the corresponding number of buttons; adjacent  
button position information e234 which is information  
for moving the button to the front/back/left/right  
5 button by user input; and a button command e235  
executed when the button is activated. In this button  
command, a command sequence can be constituted in which  
one or more commands are continuously arranged, and  
eight commands at maximum can be arranged in the  
10 present embodiment. When the button is activated, one  
to eight commands are continuously executed, and it is  
accordingly possible to execute a composite process  
such as setting and branching at once.

FIG. 53 shows an example of video synthesis  
15 including the graphic unit having the button position  
information shown in FIG. 52. In FIG. 53, video  
synthesis output comprises: two planes of main picture  
and graphic pattern; and button position information  
e233 of each button (the user can designate a plurality  
20 of pointable hot spots with respect to one piece of  
button information on the menu screen, the executed  
button command is the same). The main picture +  
graphic pattern + (1) to (3) button position  
information are superposed upon one another to perform  
25 the video synthesis. In FIG. 53, the video synthesis  
output shows a state in which the button position  
information is selected. The graphic pattern and each



button position information are stored in the graphic unit. In the example of FIG. 53, two hot spots are designated in each button position information, and button position information (1) for button 1 includes position information of hot spots 11 and 12, and corresponds to elliptic and star-shaped buttons in an upper part of the graphic pattern. Even when either button is selected/decided, the same button command e235 is issued, and a selection/activation operation of the menu is the same. Similarly, button position information (2) for button 2 includes position information of hot spots 21 and 22, and corresponds to elliptic and star-shaped buttons in a middle part of the graphic pattern. Button position information (3) for button 3 includes position information of hot spots 31 and 32, and corresponds to elliptic and star-shaped buttons in a lower part of the graphic pattern.

FIG. 54 shows an example of video synthesis further including sub-picture data in the video synthesis shown in FIG. 45. In FIG. 54, video synthesis output comprises four planes of main picture, sub-picture, graphic pattern, and mask pattern. The data of main picture + sub-picture + graphic pattern + mask pattern are superposed upon one another to perform the video synthesis. In the mask plane, the buttons selected from the buttons of (1) to (6) are superposed. In FIG. 54, the video synthesis output shows a state in

which the mask (button) pattern of (1) is selected.  
The data of graphic pattern and mask (button) pattern  
are stored in the graphic unit GU.

FIG. 55 shows a video synthesis flow associated  
5 with a video decoder including a graphic decoder. In  
FIG. 55, in the video synthesis:

(1) the video data is decoded by the video  
decoder (step S1);

(2) the sub-picture data is decoded by the  
10 sub-picture decoder (step S2);

(3) the graphic data is decoded by the graphic  
decoder (step S3);

(4) the mask data is decoded by the highlight  
decoder (step S4);

15 (5) the graphic data is mixed with the mask data  
with the mixer (step S5);

(6) the color palette selection and highlight  
process are executed (step S6);

(7) each data decoded by the video, sub-picture,  
20 and graphic decoders are mixed by the mixer (step S7);  
and

(8) conversion processes such as down conversion,  
letter box (LB), and pan scan (PS) are executed if  
necessary to output video (step S8).

25 As described above, in an information storage  
medium in which the graphic unit GU is recorded, and a  
system capable of decoding the graphic unit GU, 256

color graphic data is capable of constructing not only a conventional rectangular button but also buttons having complicated shapes such as elliptic and star shapes, and versatile menu screens can be presented to the user. Furthermore, since the graphic unit GU is constructed separately from a sub-picture stream for use in subtitles, unlike a conventional DVD menu of SD, a menu selection period can be set with time information of the graphic unit GU without being influenced by a display period of the sub-picture. Therefore, a degree of freedom of a content maker is expanded, and more versatile contents can be supplied to the user.

As described above, according to the present embodiment, a representing power of read-only DVD video content to the user is further enhanced, and comparatively simple authoring makes possible the preparation of the content easy to use by the user. As a result, there can be provided a data structure based on format standards capable of further enhancing an appeal of DVD video to the user, an information storage medium in which the data structure is recorded, and an information reproduction device capable of reproducing this information storage medium.

It is to be noted that this invention is not limited to the above-described embodiments as such, and constituting elements may be modified and embodied

without departing from the scope in an implementation stage. Various inventions may be formed by an appropriate combination of a plurality of constituting elements described in the above-described embodiments.

5 For example, some constituting elements may also be omitted from all the constituting elements described in the embodiments. Furthermore, the constituting elements in the different embodiments may be also appropriately combined.

## C L A I M S

1. An information storage medium which stores a graphic unit capable of being superimposed upon a main picture and output/displayed.


5           2. The information storage medium according to claim 1, wherein the graphic unit includes highlight information which highlights a button, mask data which embosses a button shape of a selected button, and graphic data which represents all button shapes.

10           3. The information storage medium according to claim 2, wherein the highlight information includes color palette information, button information, adjacent button information, and button command.

            4. An information reproduction device comprising:  
15           means for reproducing a graphic unit capable of being superimposed upon a main picture and output/displayed from an information storage medium;  
and

            means for separating sub-picture information from  
20           the reproduced graphic unit.

            5. An information reproduction method comprising:  
            reproducing a graphic unit capable of being  
superimposed upon a main picture and output/displayed  
from an information storage medium; and  
25           reproducing highlight information from the  
reproduced graphic unit.

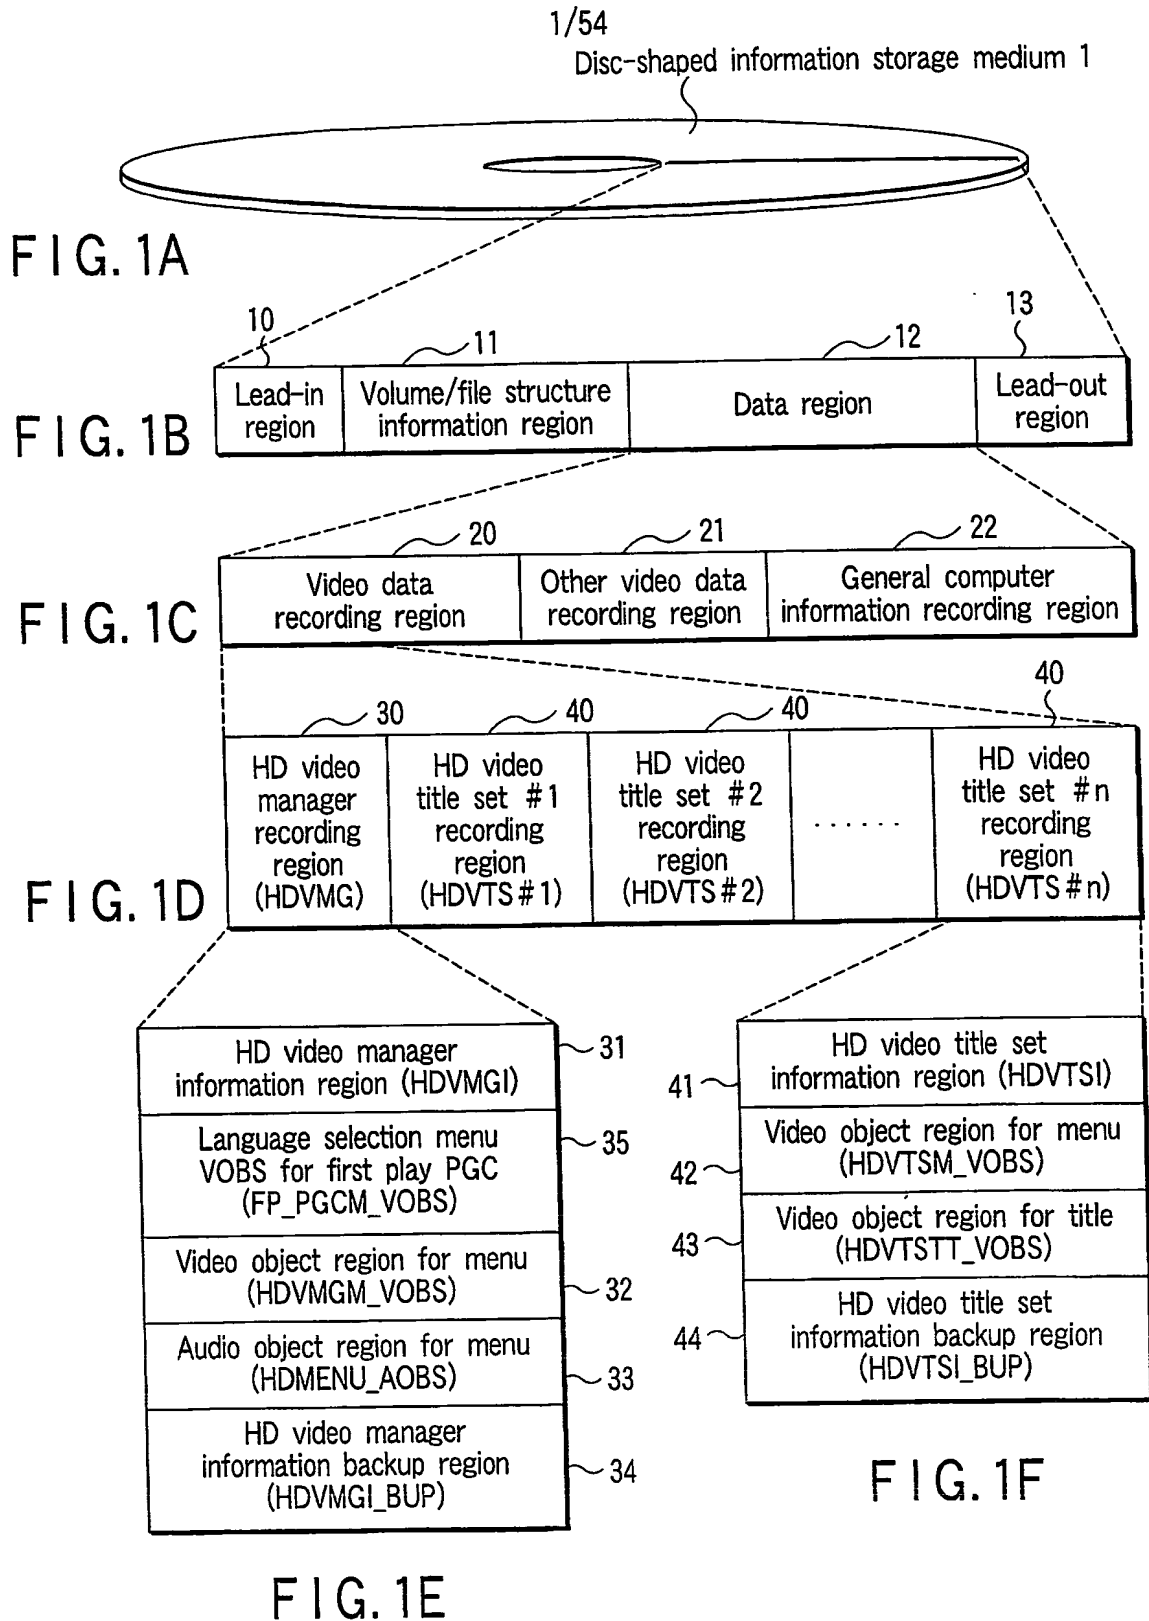

2/54

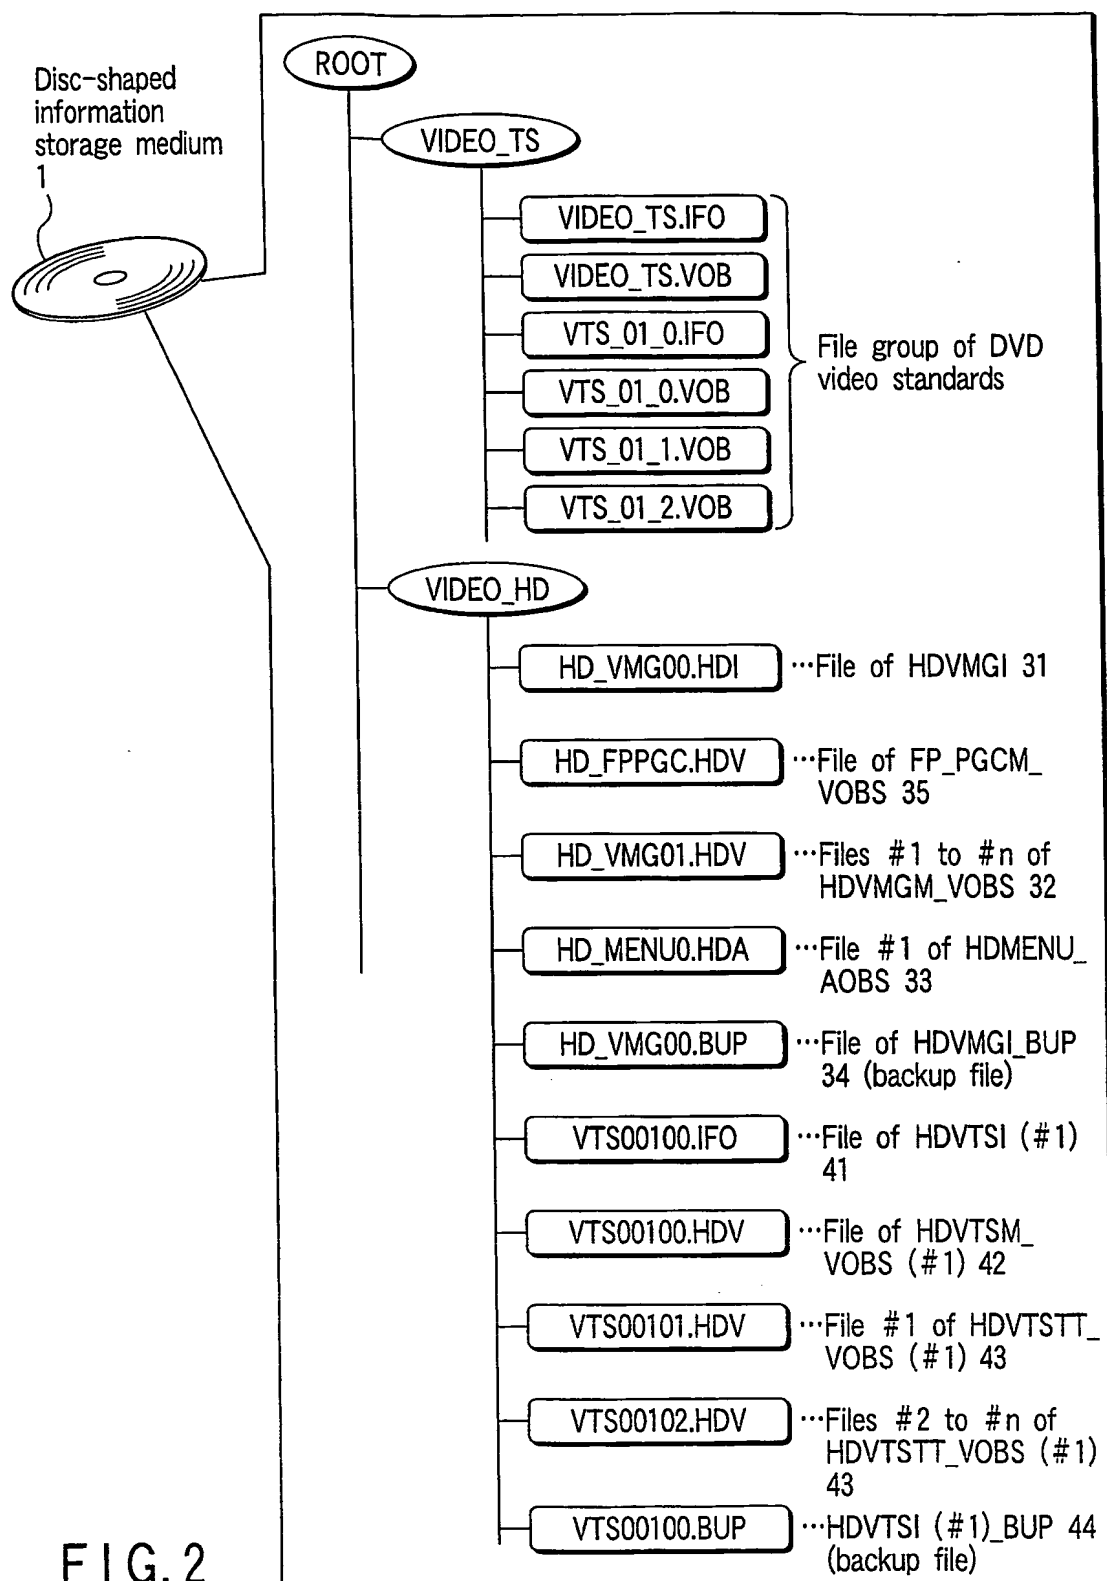


FIG. 2

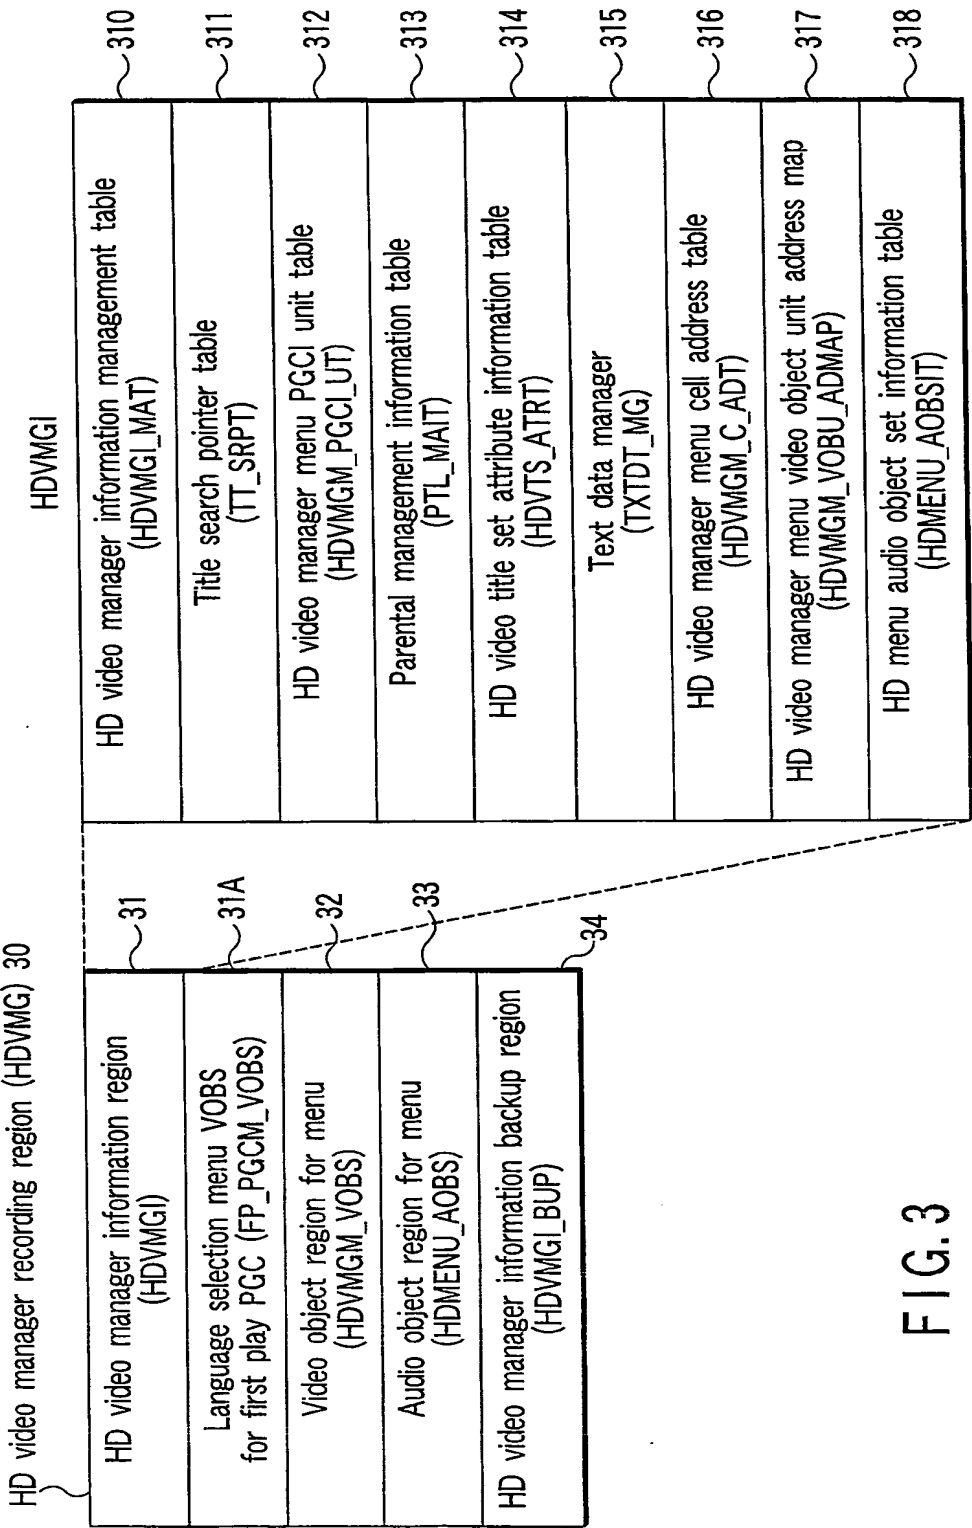


FIG. 3



4/54

## HDVMGI\_MAT

<p>310</p> <p>HD video manager information management table (HDVMGI_MAT)</p>	HDVMG_ID	HD video manager identifier
	HDVMG_EA	End address of HD video manager
	HDVMGI_EA	End address of HD video manager information
	VERN	Version number of HD-DVD video standards
	HDVMG_CAT	HD video manager category
	VLMS_ID	Volume set identifier
	ADP_ID	Adaptation identifier
	HDVTS_Ns	Number of HD video title sets
	PVR_ID	Identifier unique to provider
	POS_CD	POS code
	HDVMGI_MAT_EA	End address of HD video manager management information table
	FP_PGCI_SA	Start address of first play program chain information
	HDVMGM_VOBS_SA	Start address of HDVMGM_VOBS
	HDMENU_AOBS_SA	Start address of HDVMGM_AOBS
	TT_SRPT_SA	Start address of TT_SRPT
	HDVMGM_PGCI_UT_SA	Start address of HDVMGM_PGCI_UT
	PTL_MAIT_SA	Start address of PTL_MAIT
	HDVTS_ATRT_SA	Start address of HDVTS_ATRT
	TXTDT_MG_SA	Start address of TXTDT_MG
	HDVMGM_C_ADT_SA	Start address of HDVTSM_C_ADT
	HDVMGM_VOBU_ADMAP_SA	Start address of HDVTSM_VOBU_ADMAP
	HDMENU_AOBSIT_SA	Start address of information table HDVMGM_AOBS
	HDVMGM_V_ATR	Video attribute of HDVMGM
	HDVMGM_AST_Ns	Number of HDVMGM audio streams
	HDVMGM_AST_ATR	Attribute of HDVMGM audio stream
	HDVMGM_SPST_Ns	Number of HDVMGM sub-picture streams
	HDVMGM_SPST_ATR	Attribute of HDVMGM sub-picture stream
	HDVMGM_GUST_Ns	Number of HDVMGM graphic unit streams
	HDVMGM_GUST_ATR	Attribute of HDVMGM graphic unit stream
	FP_PGCI	First play PGCI

FIG. 4

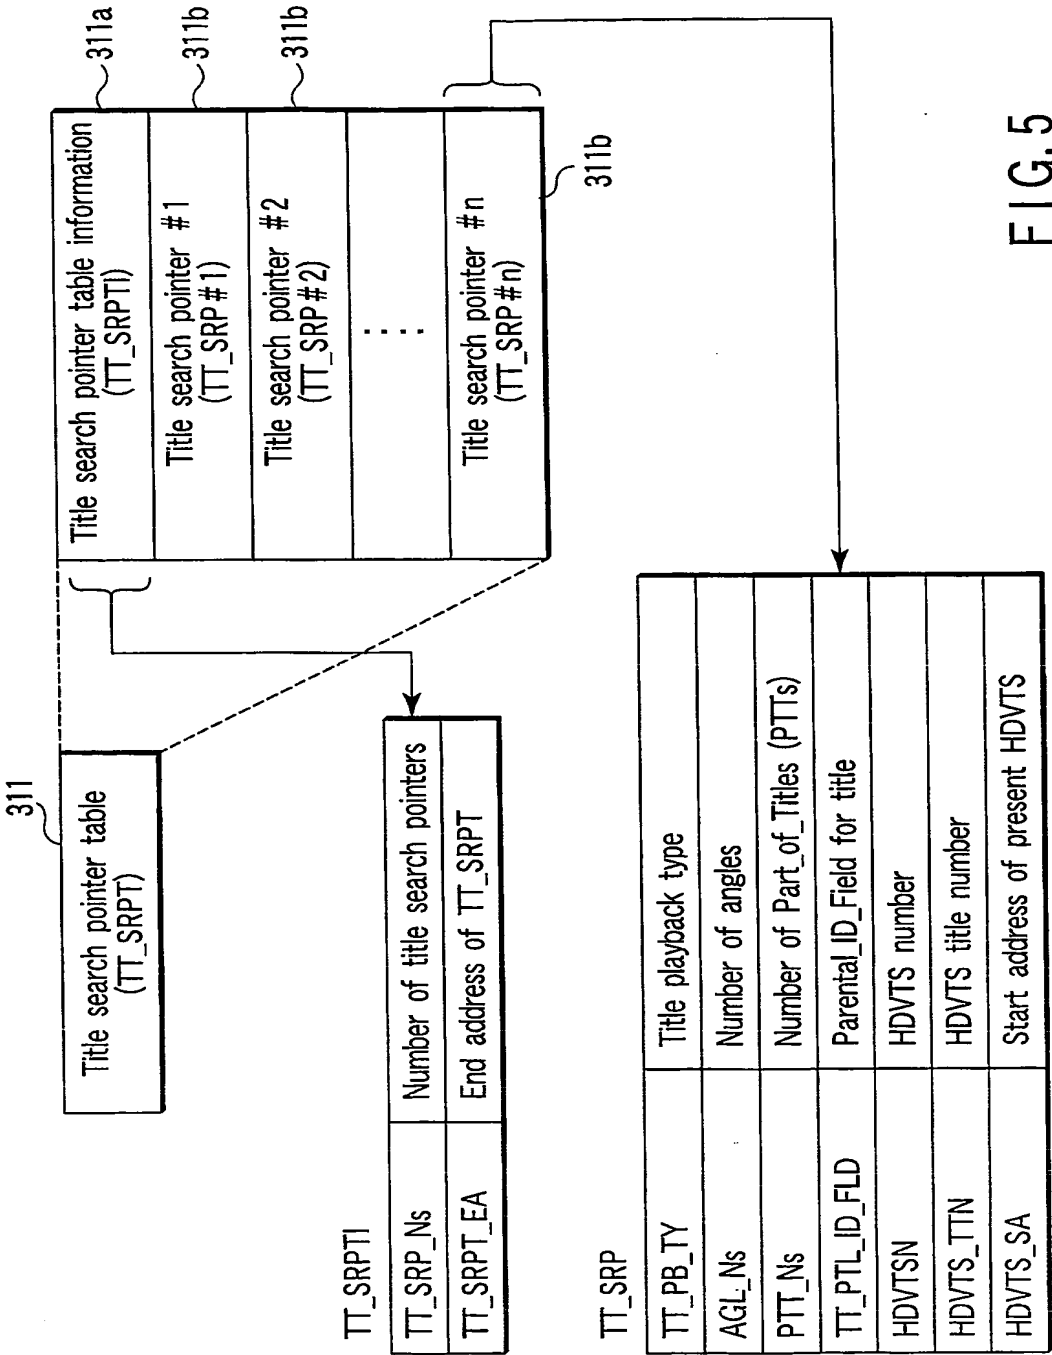


FIG. 5

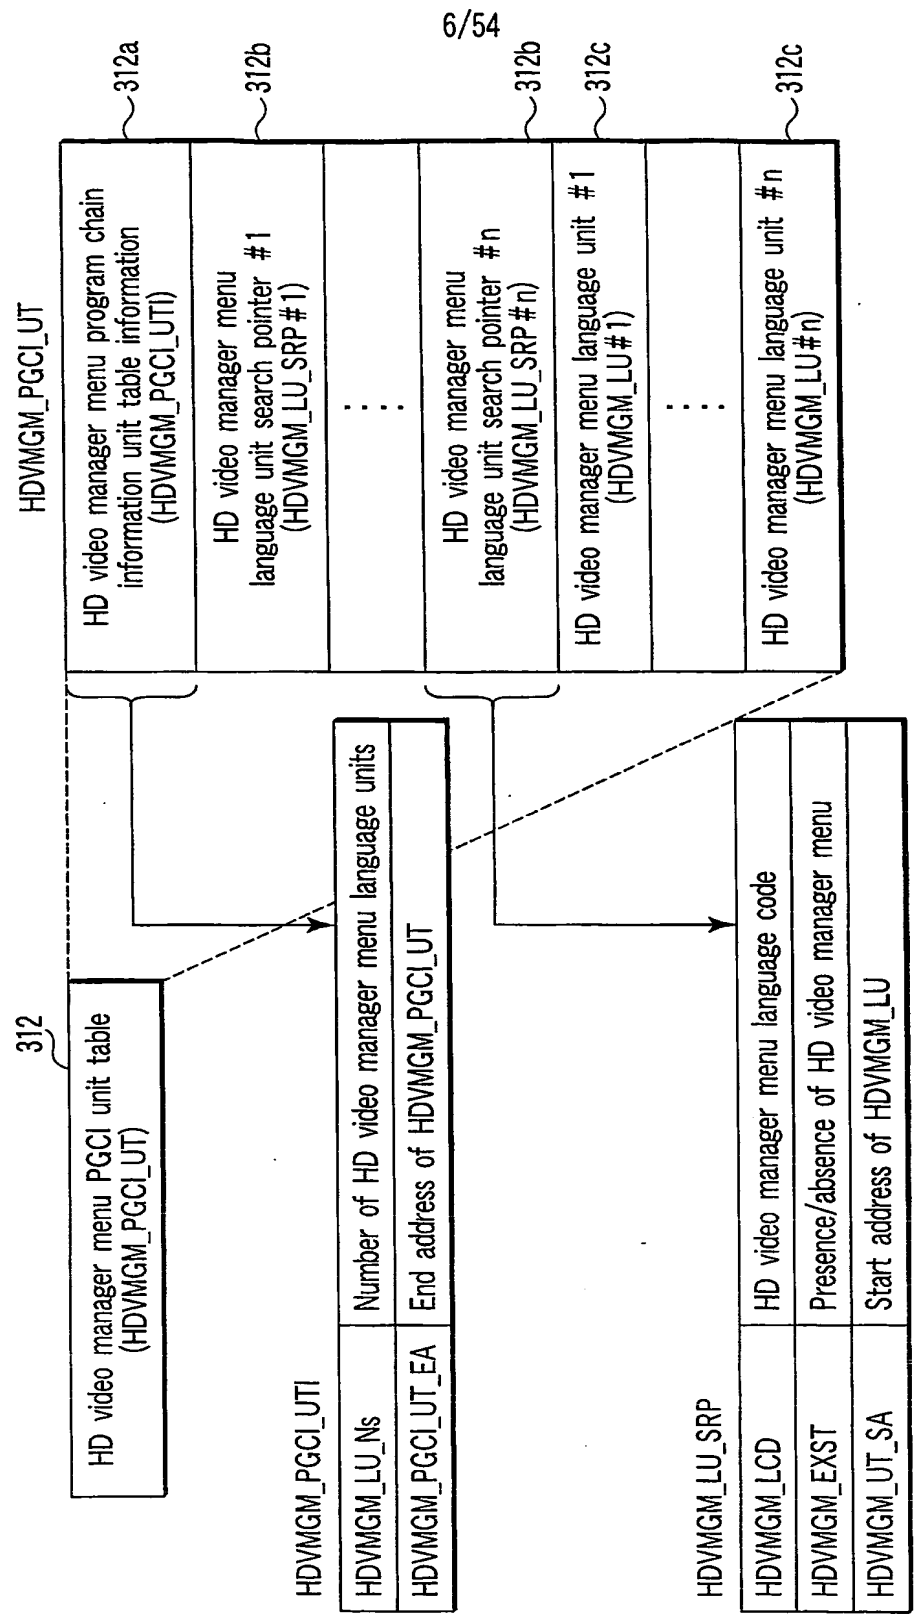


FIG. 6

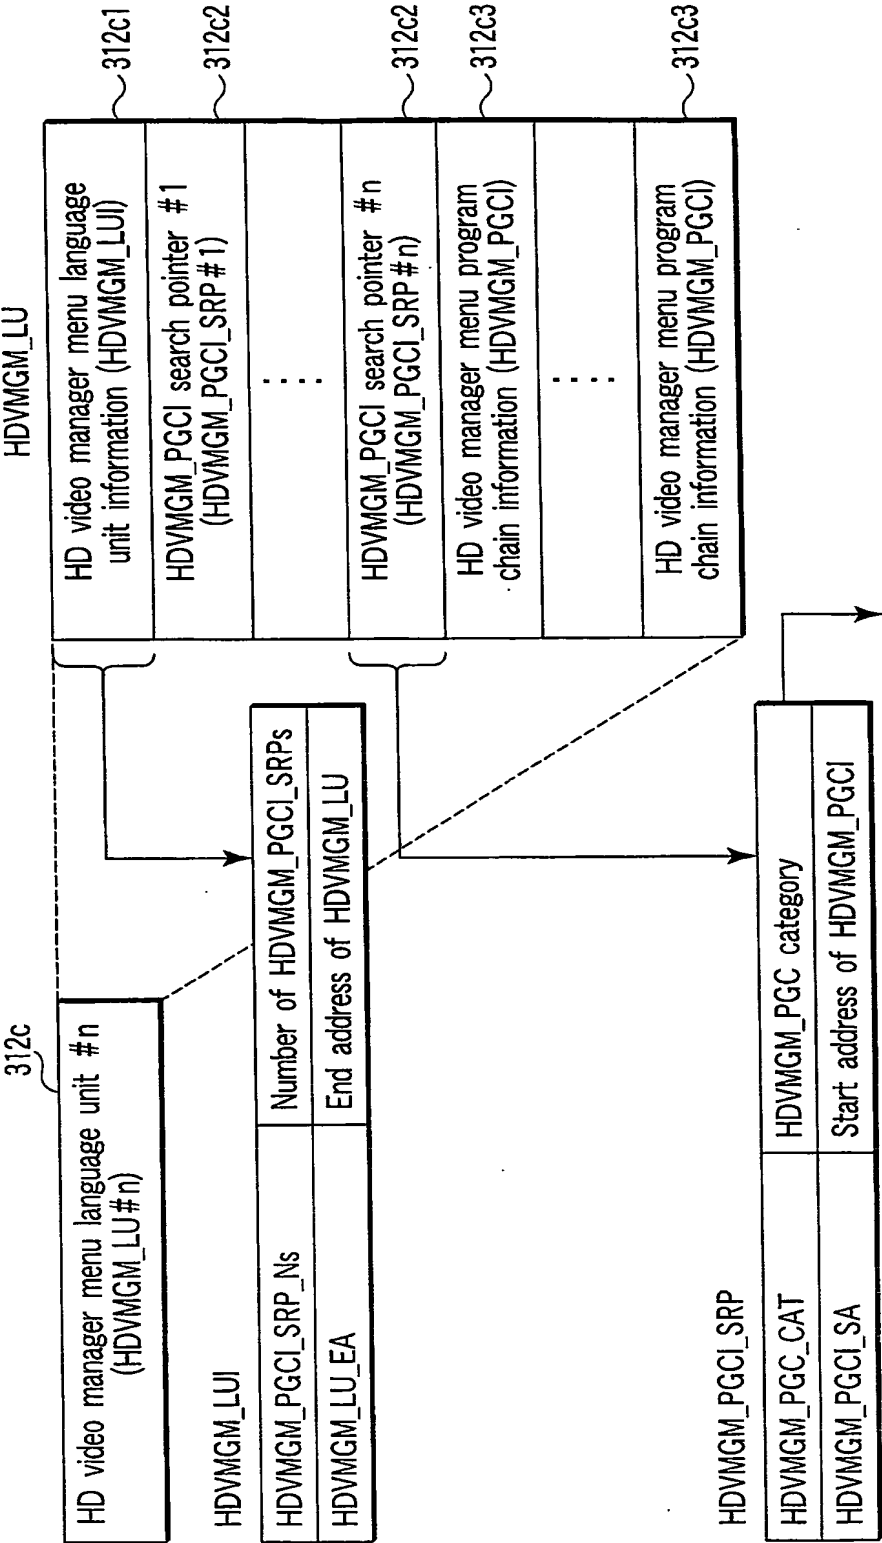


FIG. 7

HDMVMGM\_PGC\_CAT

Byte \ Bit	b7	b6	b5	b4	b3	b2	b1	b0								
0	Entry type	Reserved	Audio information selection		Menu											
1	Block mode		Block type						Audio information number							
2	PTL_ID_FLD (upper bit)															
3	PTL_ID_FLD (lower bit)															

Audio information selection  
Indicate selection of audio reproduction of HDMENU\_AOBS or HDMVMGM\_VOBS, and start/end trigger of HDMENU\_AOBS  
...00b : Audio in VOB designated by PGC is reproduced (stop HDMENU\_AOBS)  
...10b : HDMENU\_AOBS is continuously reproduced (ignore audio in VOB)  
...11b : Start reproduction of HDMENU\_AOBS (ignore audio in VOB)

Audio information number  
Designate AOB number #n to be reproduced in HDMENU\_AOBS

FIG. 8

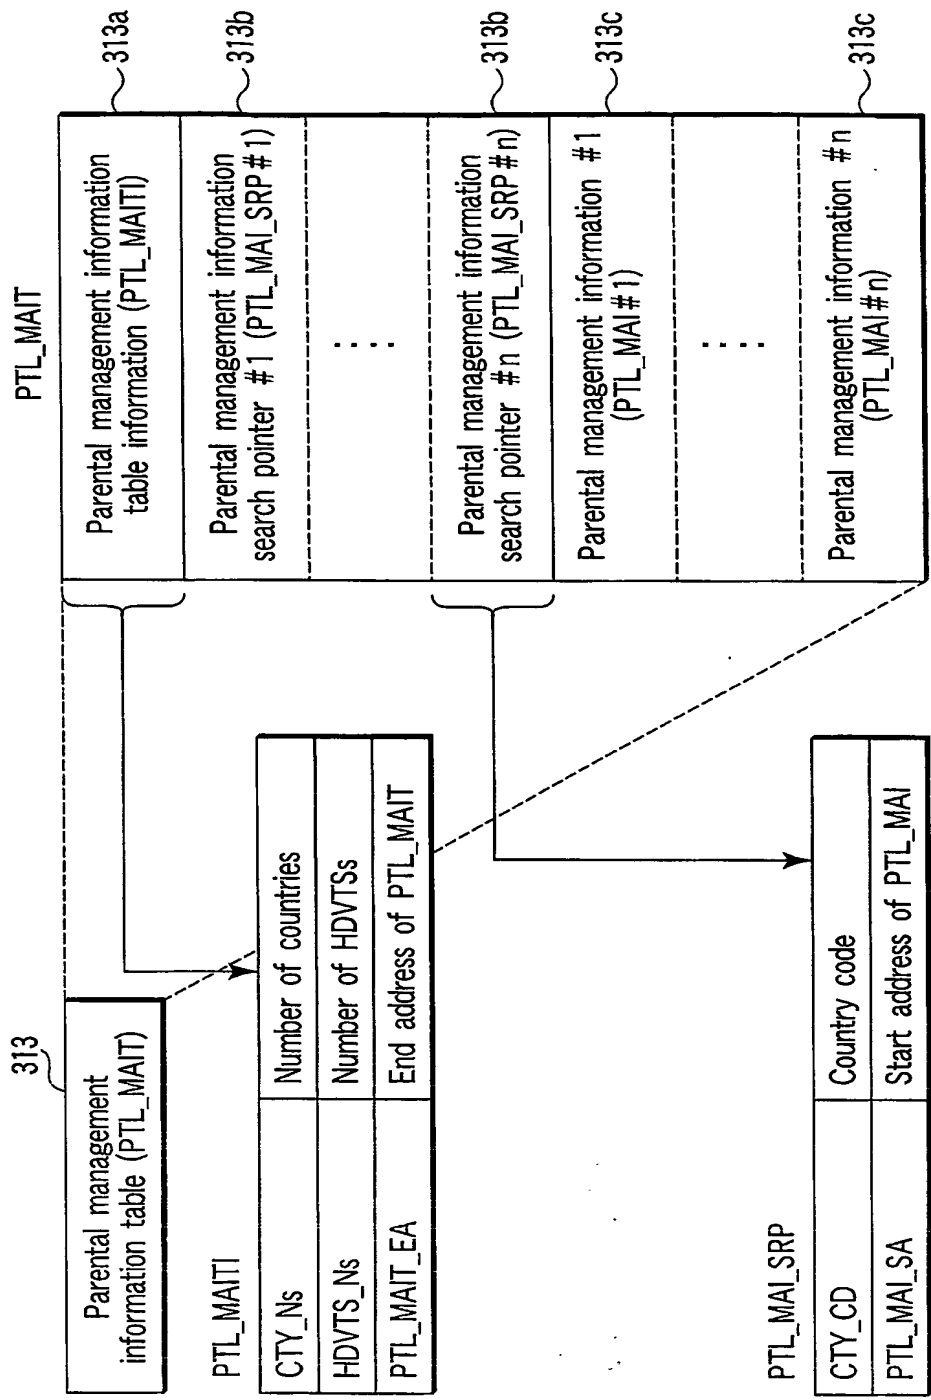


FIG. 9

10/54

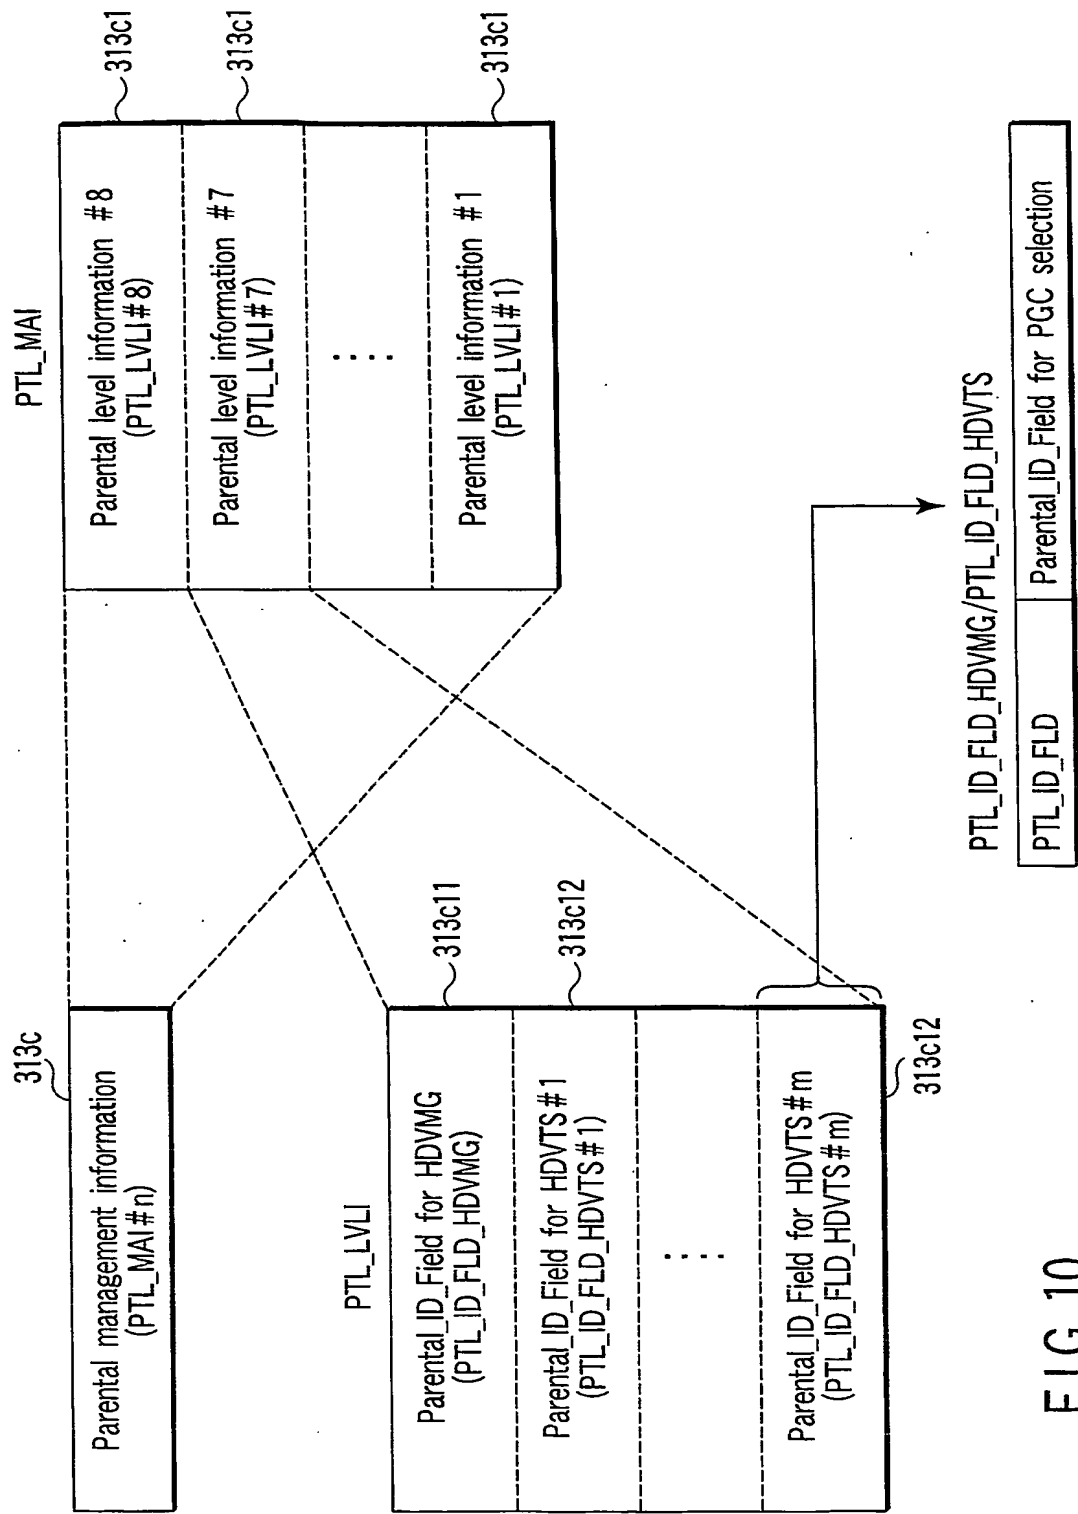
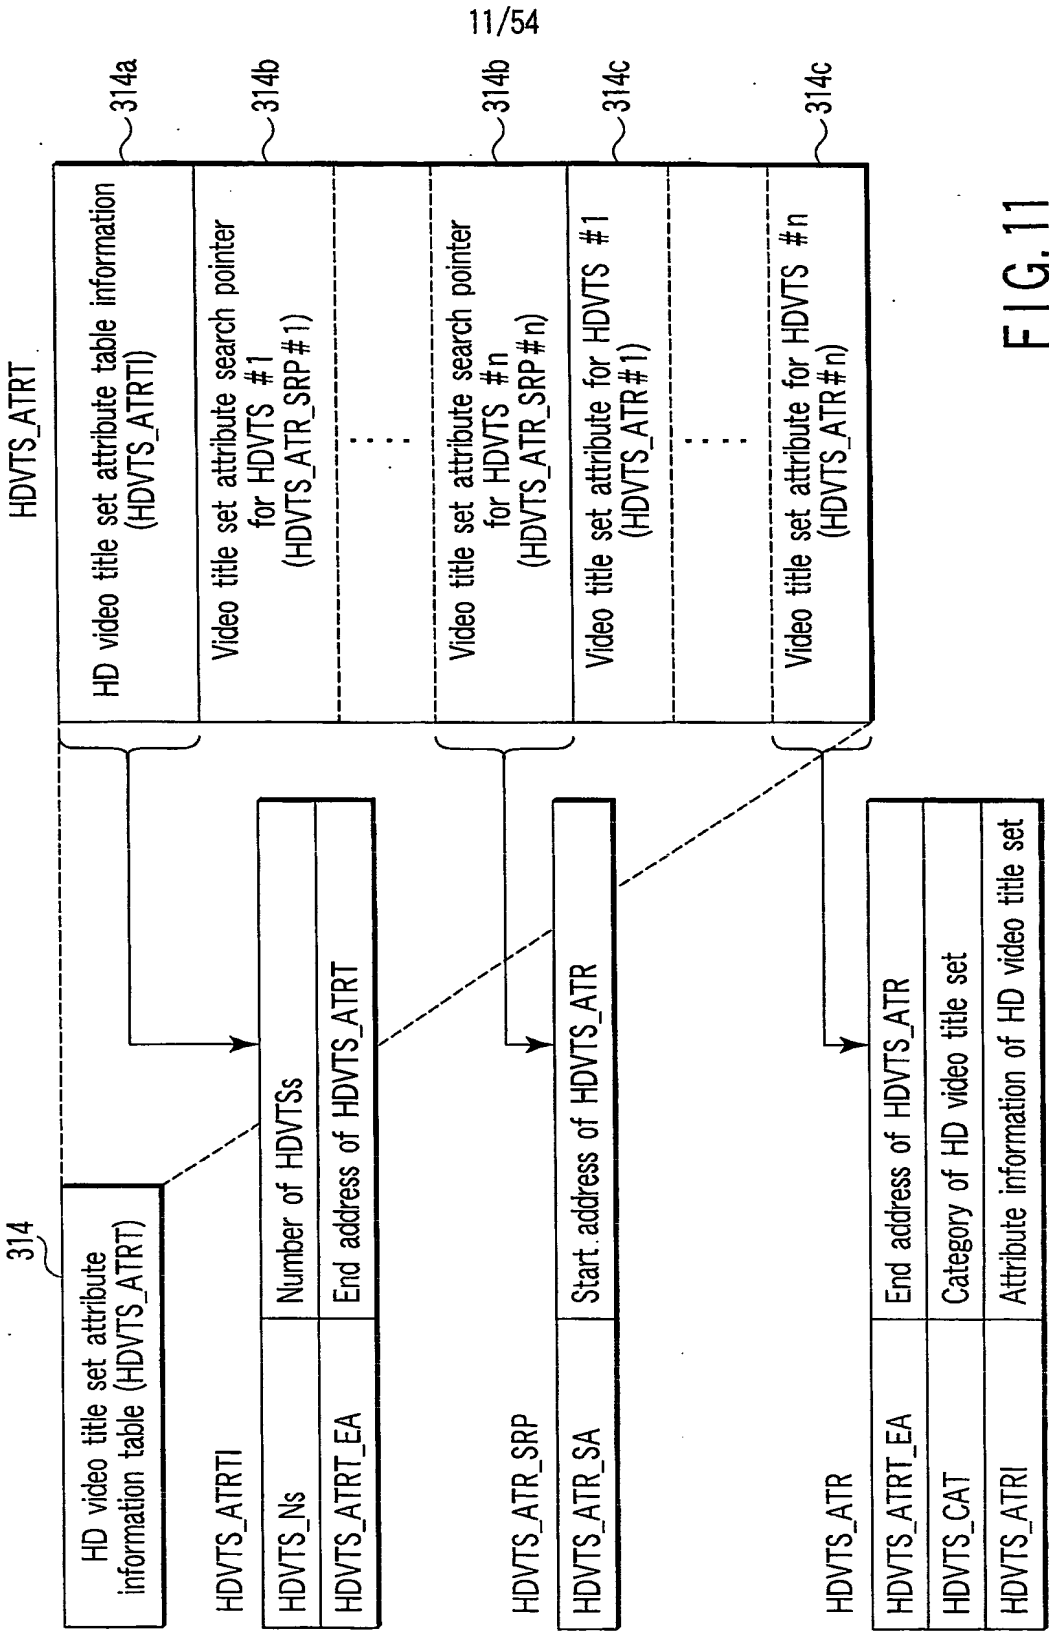


FIG. 10





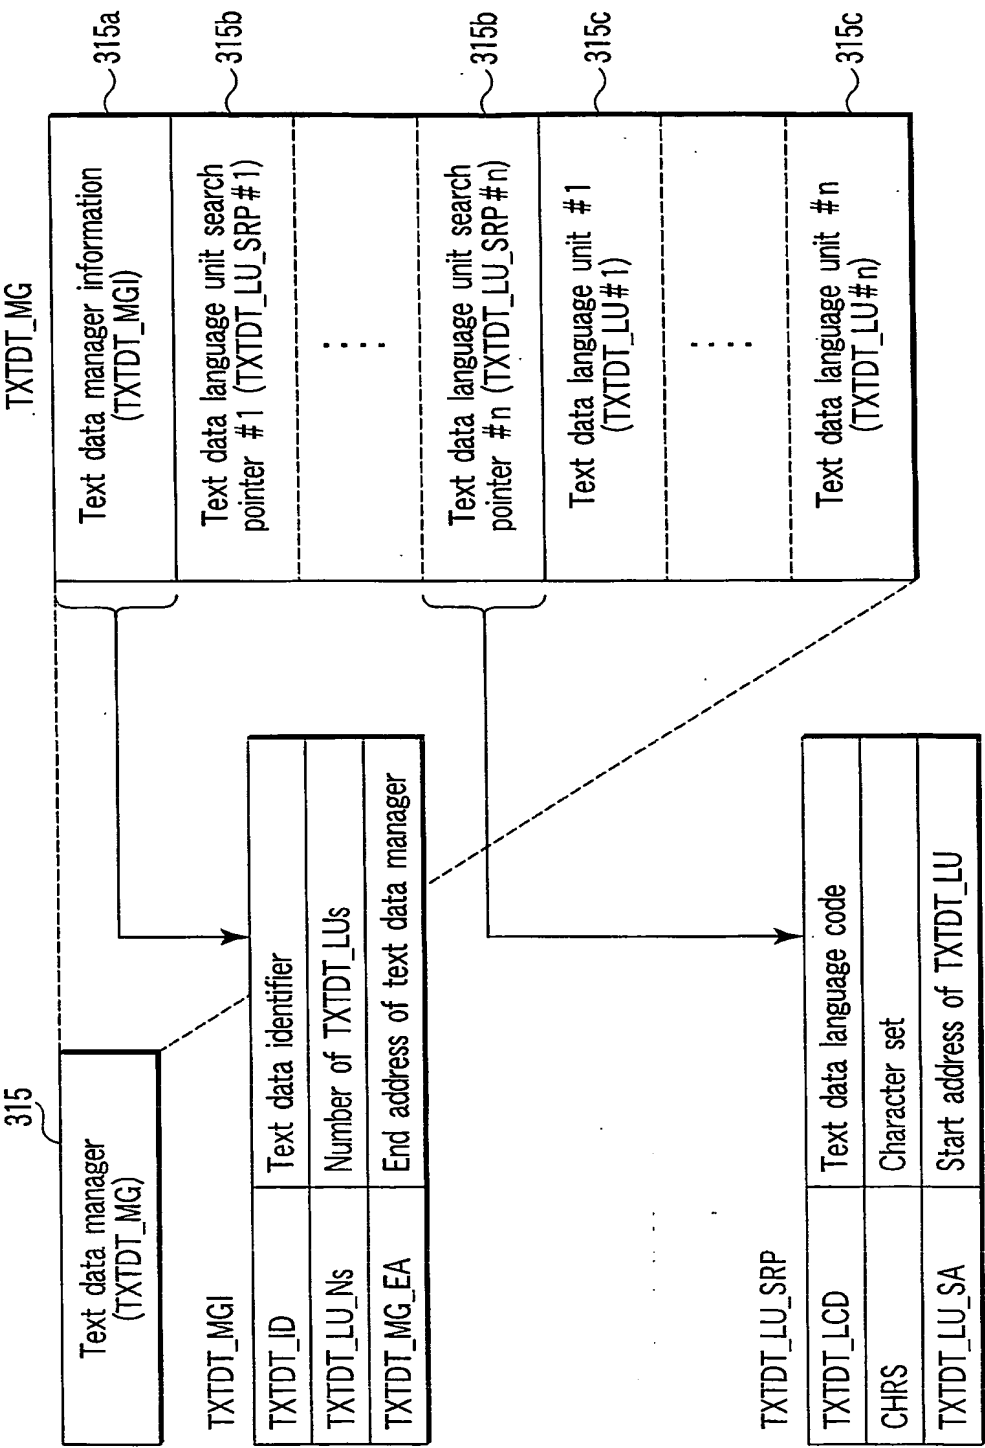


FIG. 12

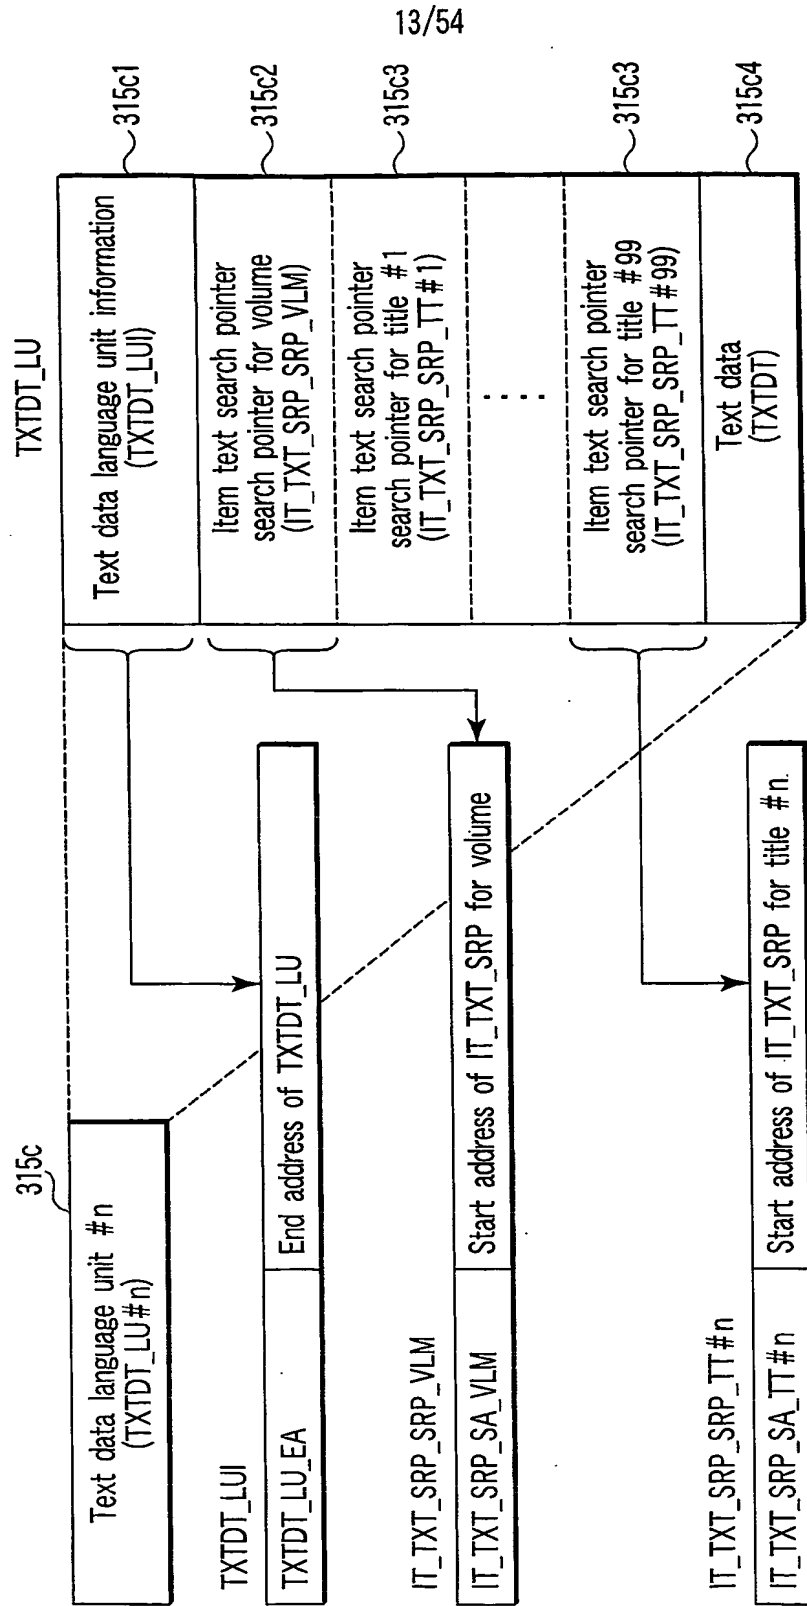


FIG.13

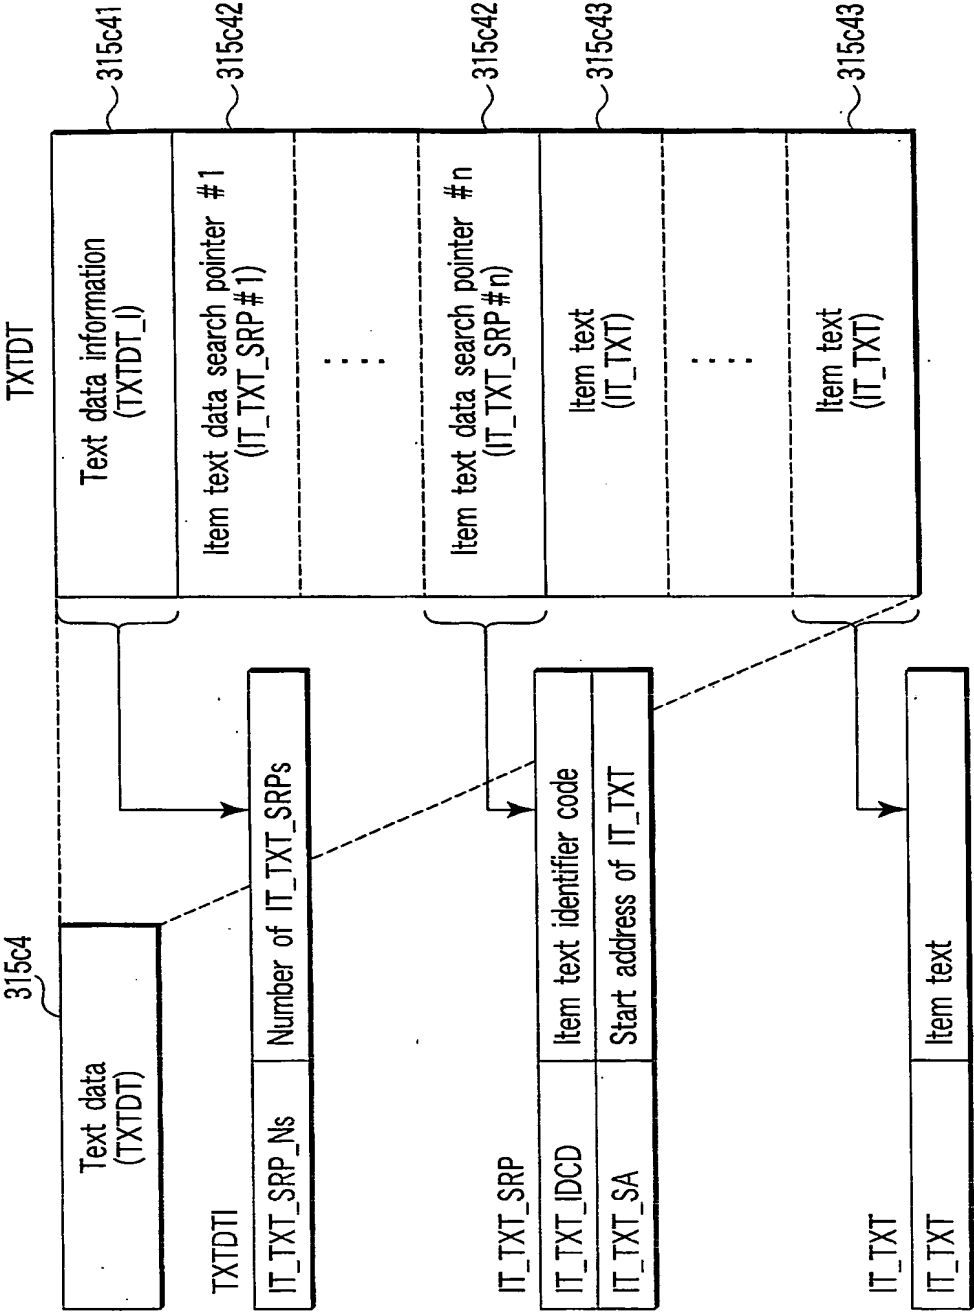


FIG. 14

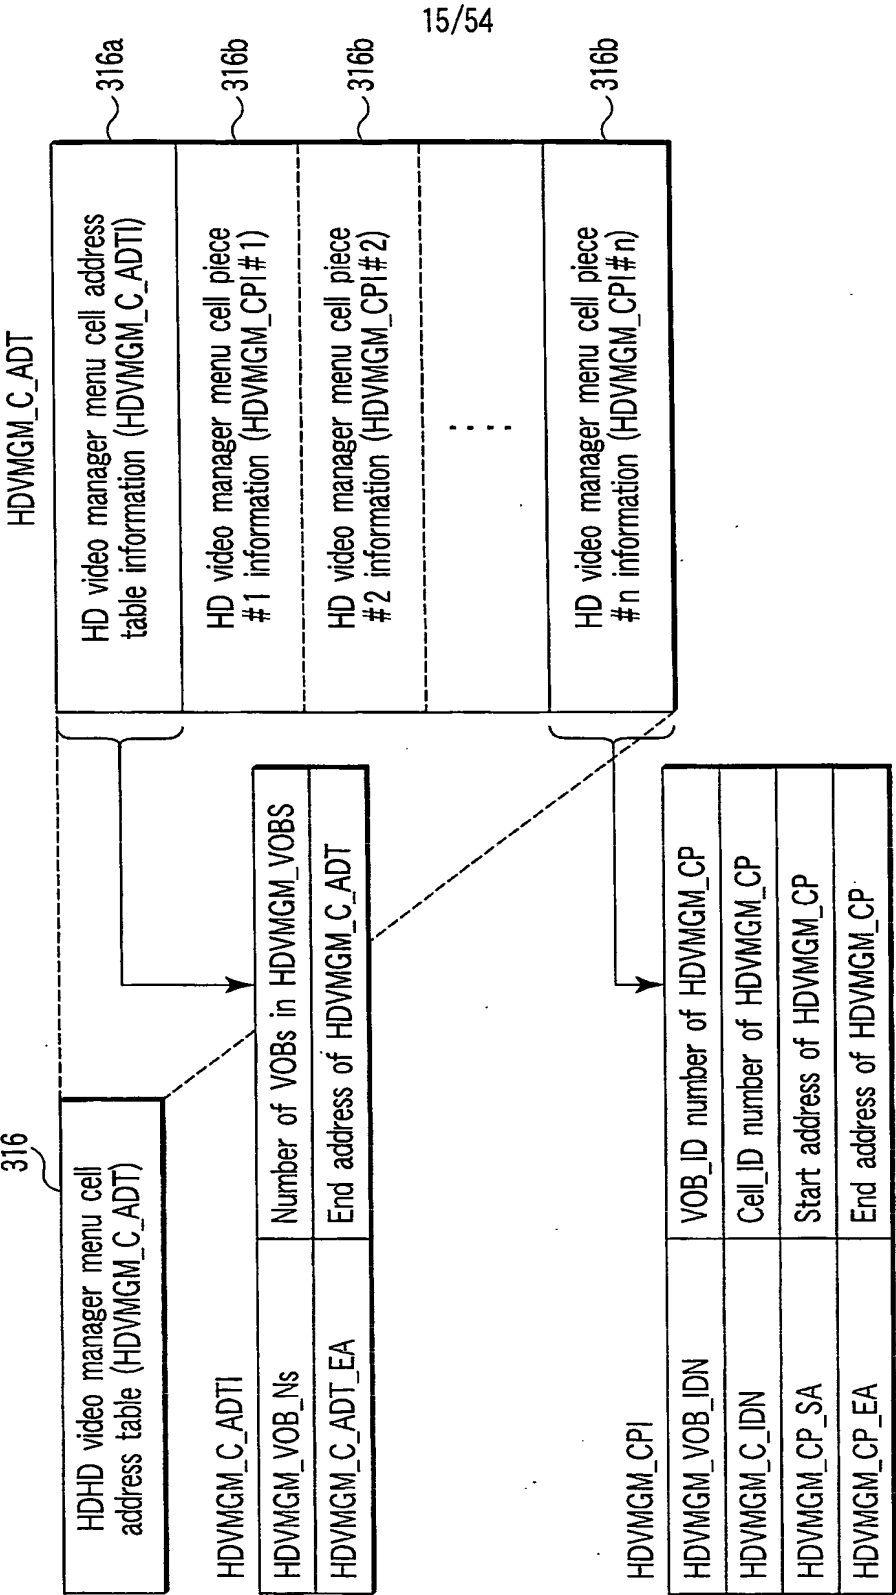


FIG.15

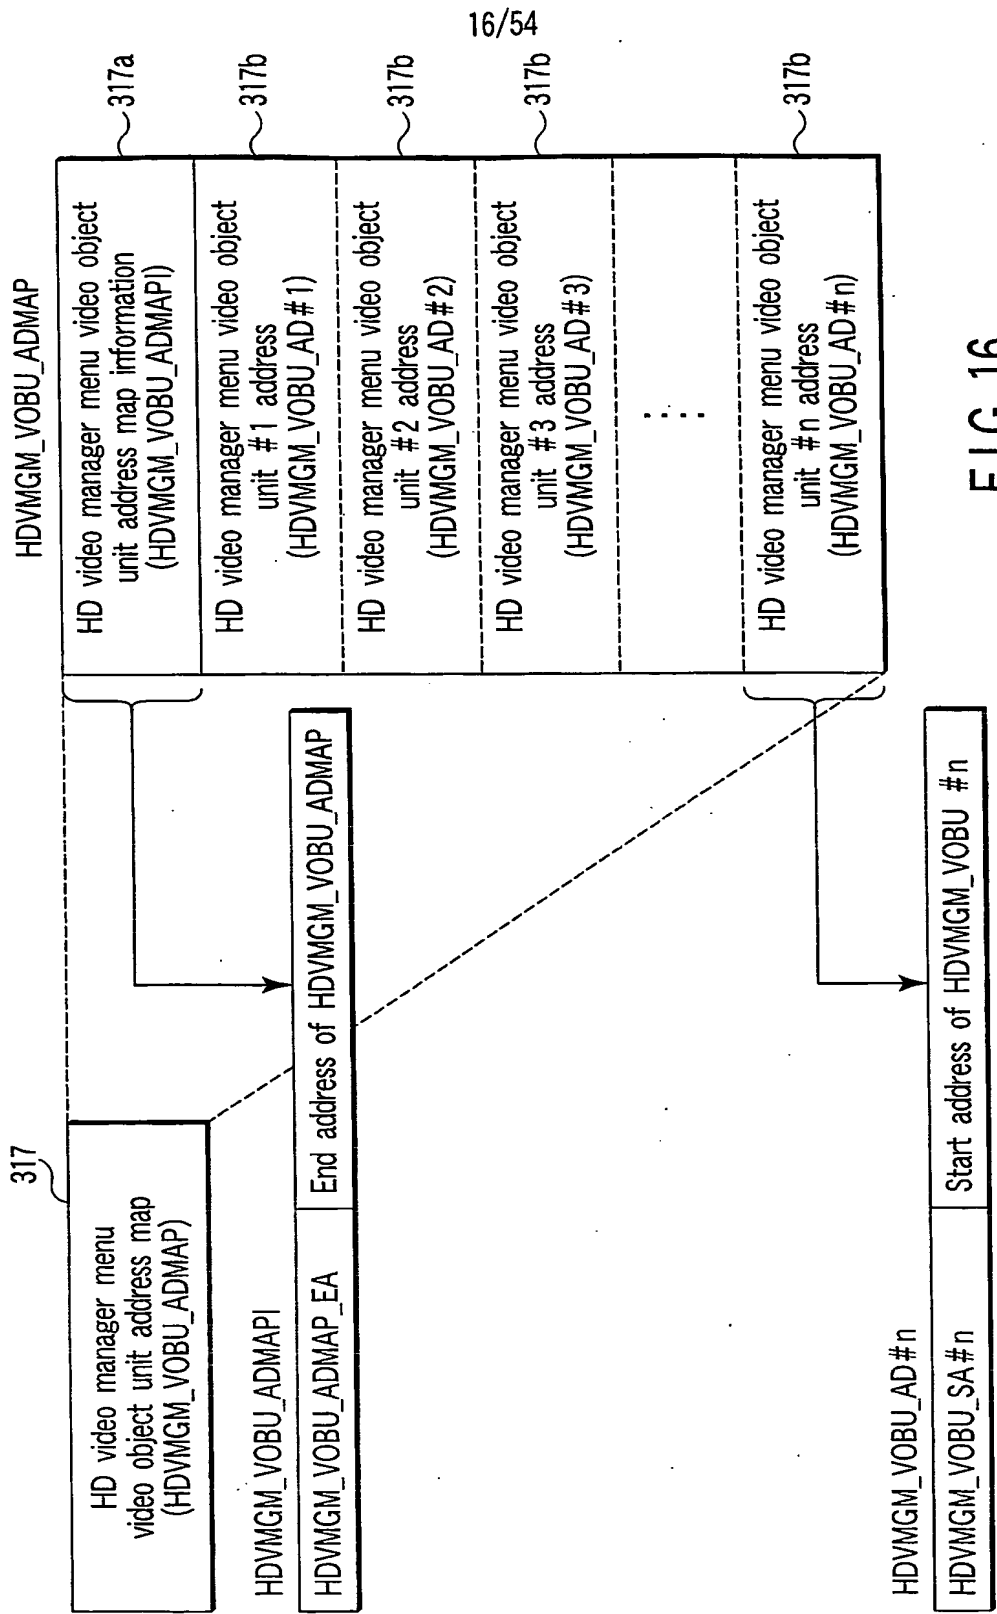


FIG. 16

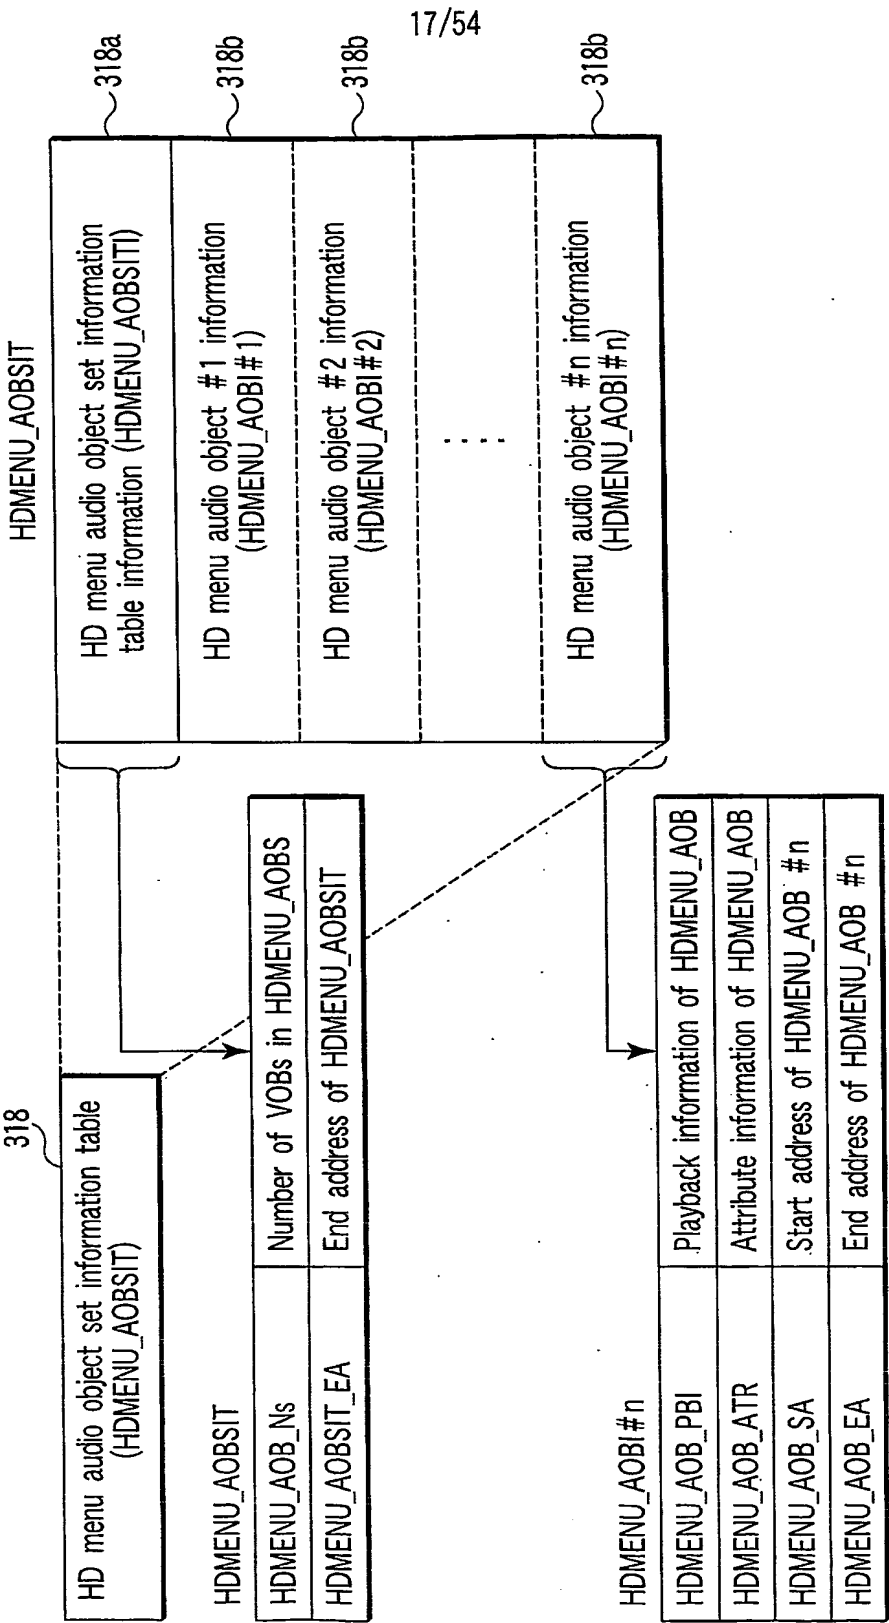
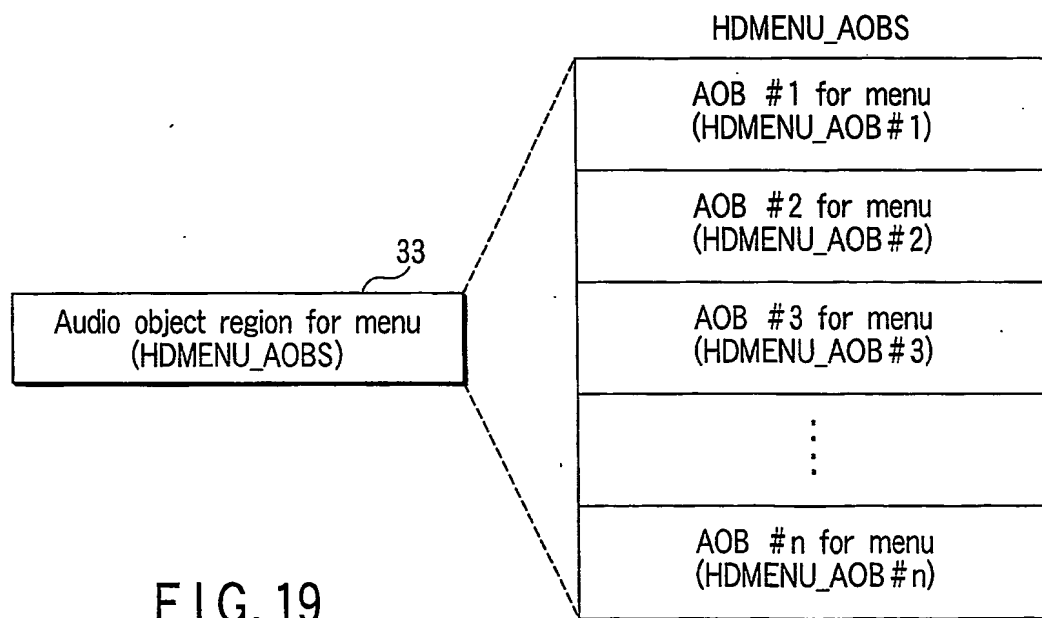
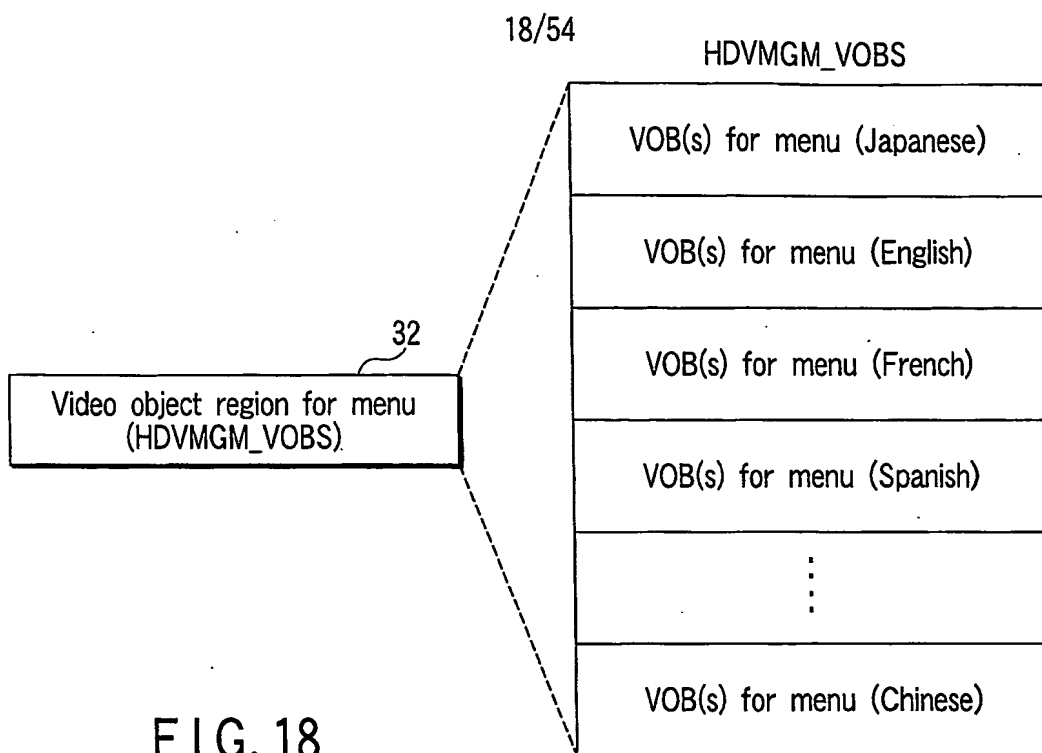


FIG.17



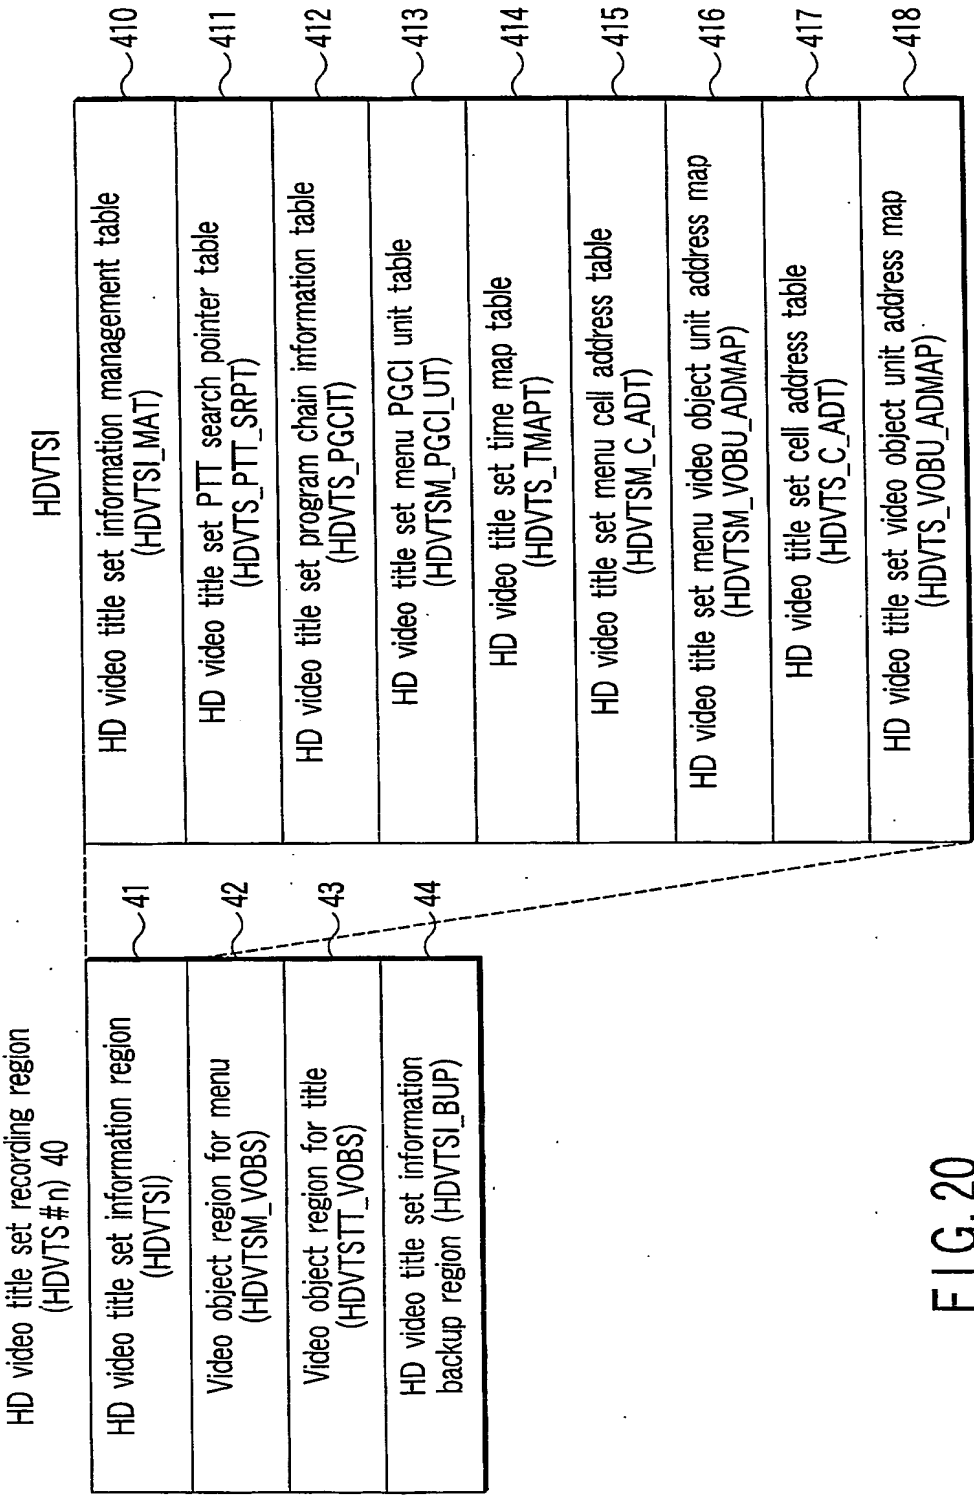


FIG. 20



20/54

<p>410</p> <p>HD video title set information management table (HDVTSI_MAT)</p>	HDVTSI_MAT	
	HDVTS_ID	HD video title set identifier
	HDVTS_EA	End address of HDVTS
	HDVTSI_EA	End address of HDVTSI
	VERN	Version number of HD-DVD video standards
	HDVTS_CAT	HDVTS category
	HDVTSI_MAT_EA	End address of HDVTSI_MAT
	HDVTSM_VOBS_SA	Start address of HDVTSM_VOBS
	HDVTSTT_VOBS_SA	Start address of HDVTSTT_VOBS
	HDVTS_PTT_SRPT_SA	Start address of HDVTS_PPT_SRPT
	HDVTS_PGCIT_SA	Start address of HDVTSM_PGCIT
	HDVTSM_PGCI_UT_SA	Start address of HDVTSM_PGCI_UT
	HDVTS_TMAP_SA	Start address of HDVTS_TMAP
	HDVTSM_C_ADT_SA	Start address of HDVTSM_C_ADT
	HDVTSM_VOBU_ADMAP_SA	Start address of HDVTSM_VOBU_ADMAP
	HDVTS_C_ADT_SA	Start address of HDVTS_C_ADT
	HDVTS_VOBU_ADMAP_SA	Start address of HDVTS_VOBU_ADMAP
	HDVTSM_V_ATR	Video attribute of HDVTSM
	HDVTSM_AST_Ns	Number of HDVTSM audio streams
	HDVTSM_AST_ATR	HDVTSM audio stream attribute
	HDVTSM_SPST_Ns	Number of HDVTSM sub-picture streams
	HDVTSM_SPST_ATR	HDVTSM sub-picture stream attribute
	HDVTS_V_ATR	Video attribute of HDVTS
	HDVTS_AST_Ns	Number of HDVTS audio streams
	HDVTS_AST_ATRT	HDVTS audio stream attribute table
	HDVTS_SPST_Ns	Number of HDVTS sub-picture streams
	HDVTS_SPST_ATRT	HDVTS sub-picture stream attribute table
	HDVTS_MU_AST_ATRT	HDVTS multi-channel audio stream attribute table
	HDVTSM_GUST_Ns	Number of HDVTSM graphic unit streams
	HDVTSM_GUST_ATR	HDVTSM graphic unit stream attribute
	HDVTS_GUST_Ns	Number of HDVTS graphic unit streams
	HDVTS_GUST_ATRT	HDVTS graphic unit stream attribute table

FIG. 21

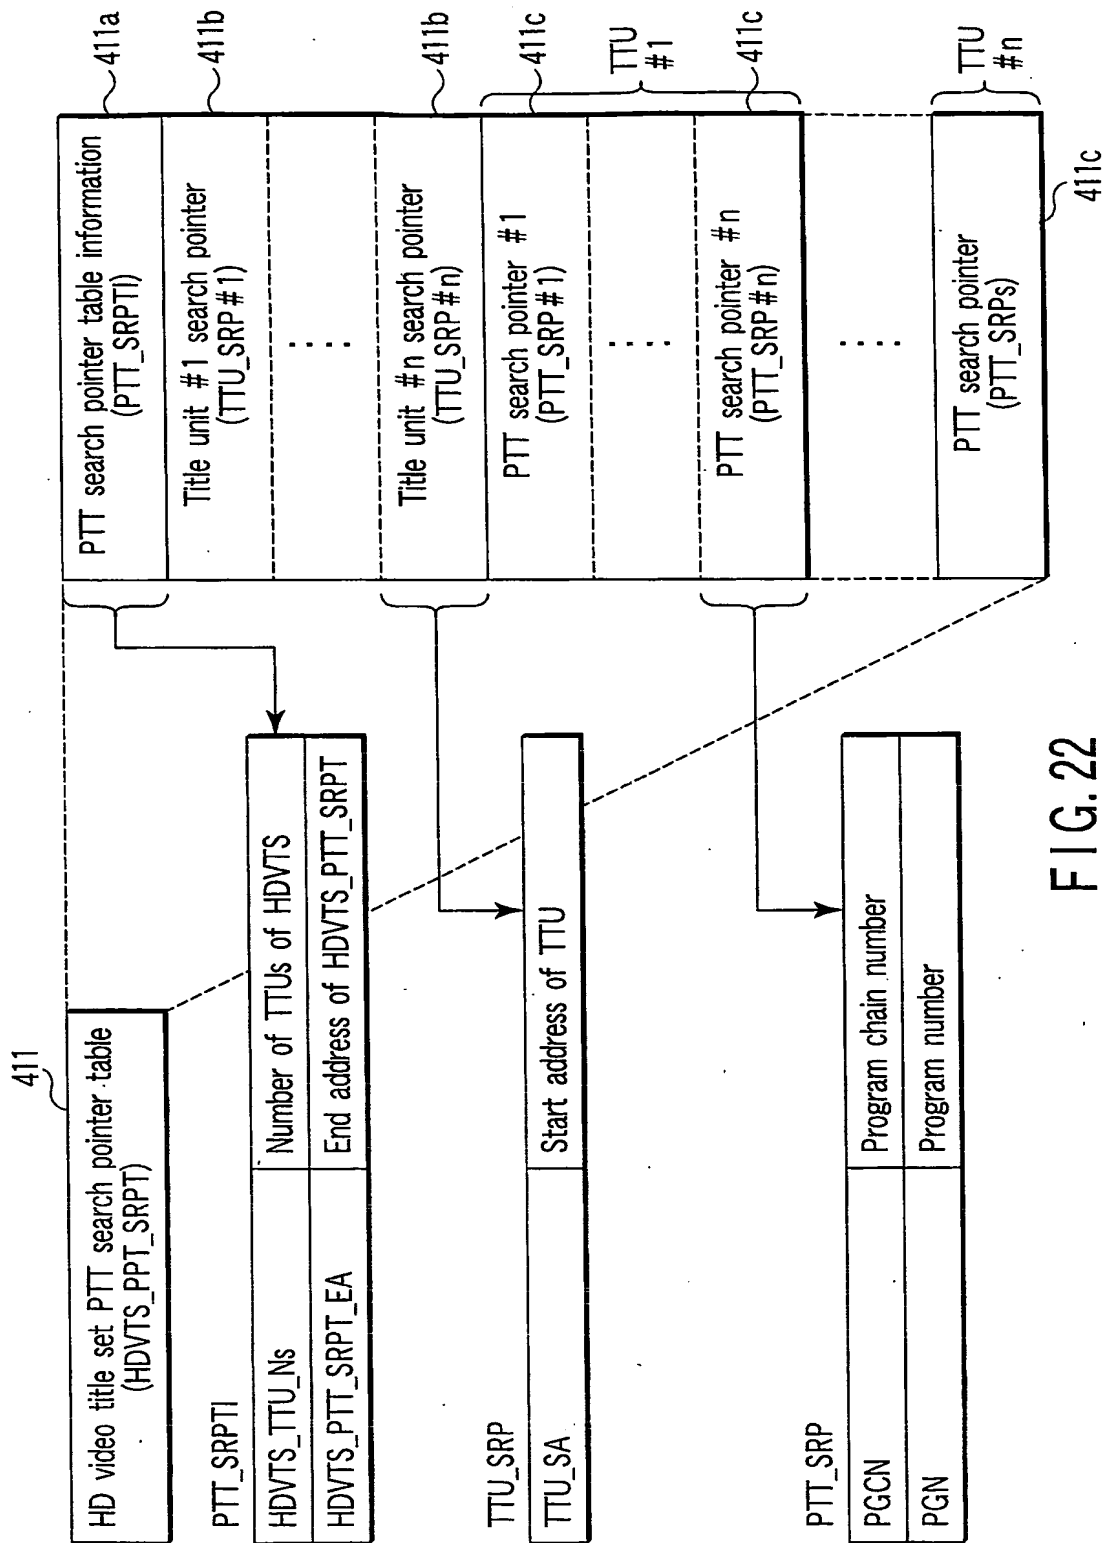


FIG. 22

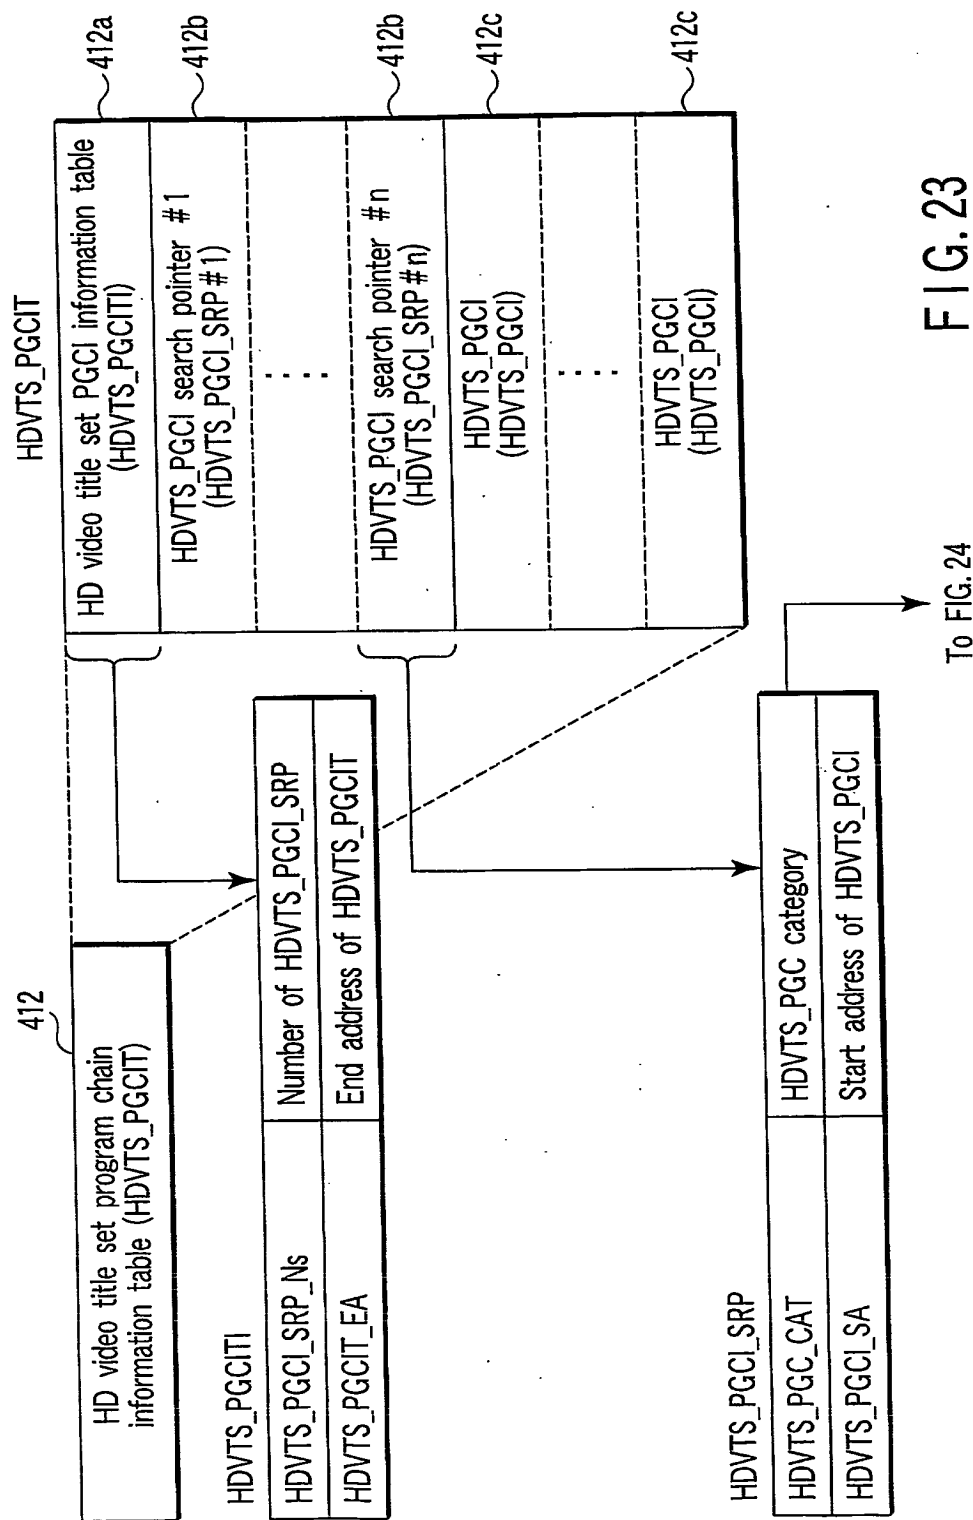


FIG. 23

To FIG. 24

HDVTS\_PGC\_CAT

Bit Byte	b7	b6	b5	b4	b3	b2	b1	b0
0	Entry type		VTS_ITTN					
1	Block mode		Block type		Reserved			RSM permission
2	PTL_ID_FLD (upper bit)							
3	PTL_ID_FLD (lower bit)							

RSM permission  
Indicate whether or not reproduction resume by RSM command or Resume () function is permitted by this PGC  
...0b : Permission (update RSM information)  
...1b : Prohibition (RSM information is not updated)

FIG. 24

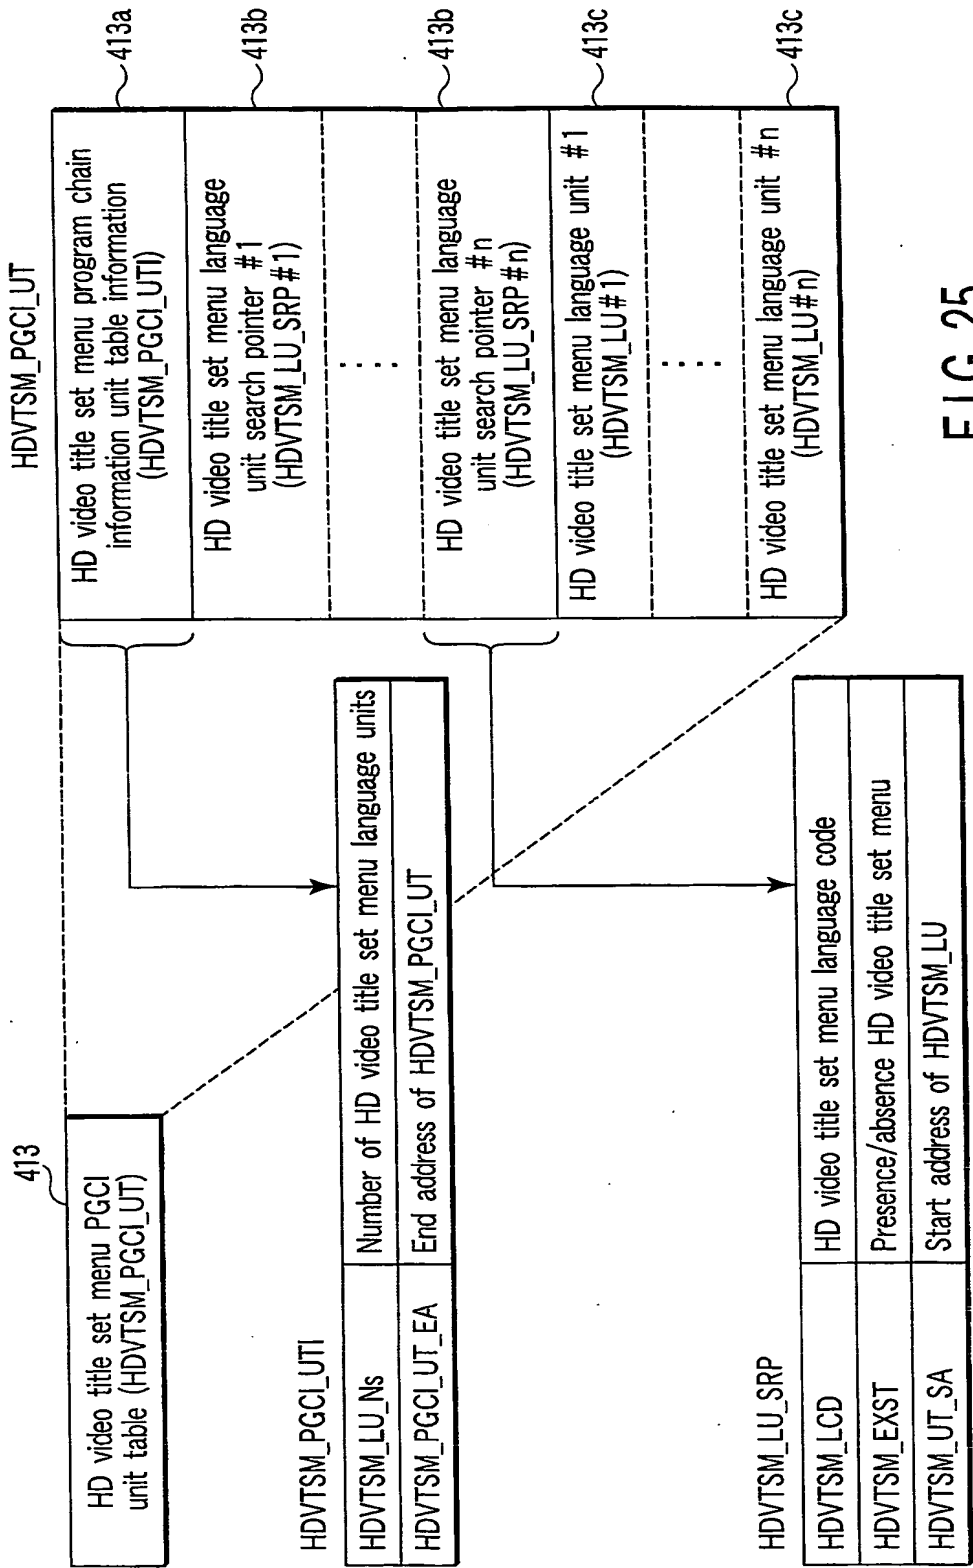


FIG. 25

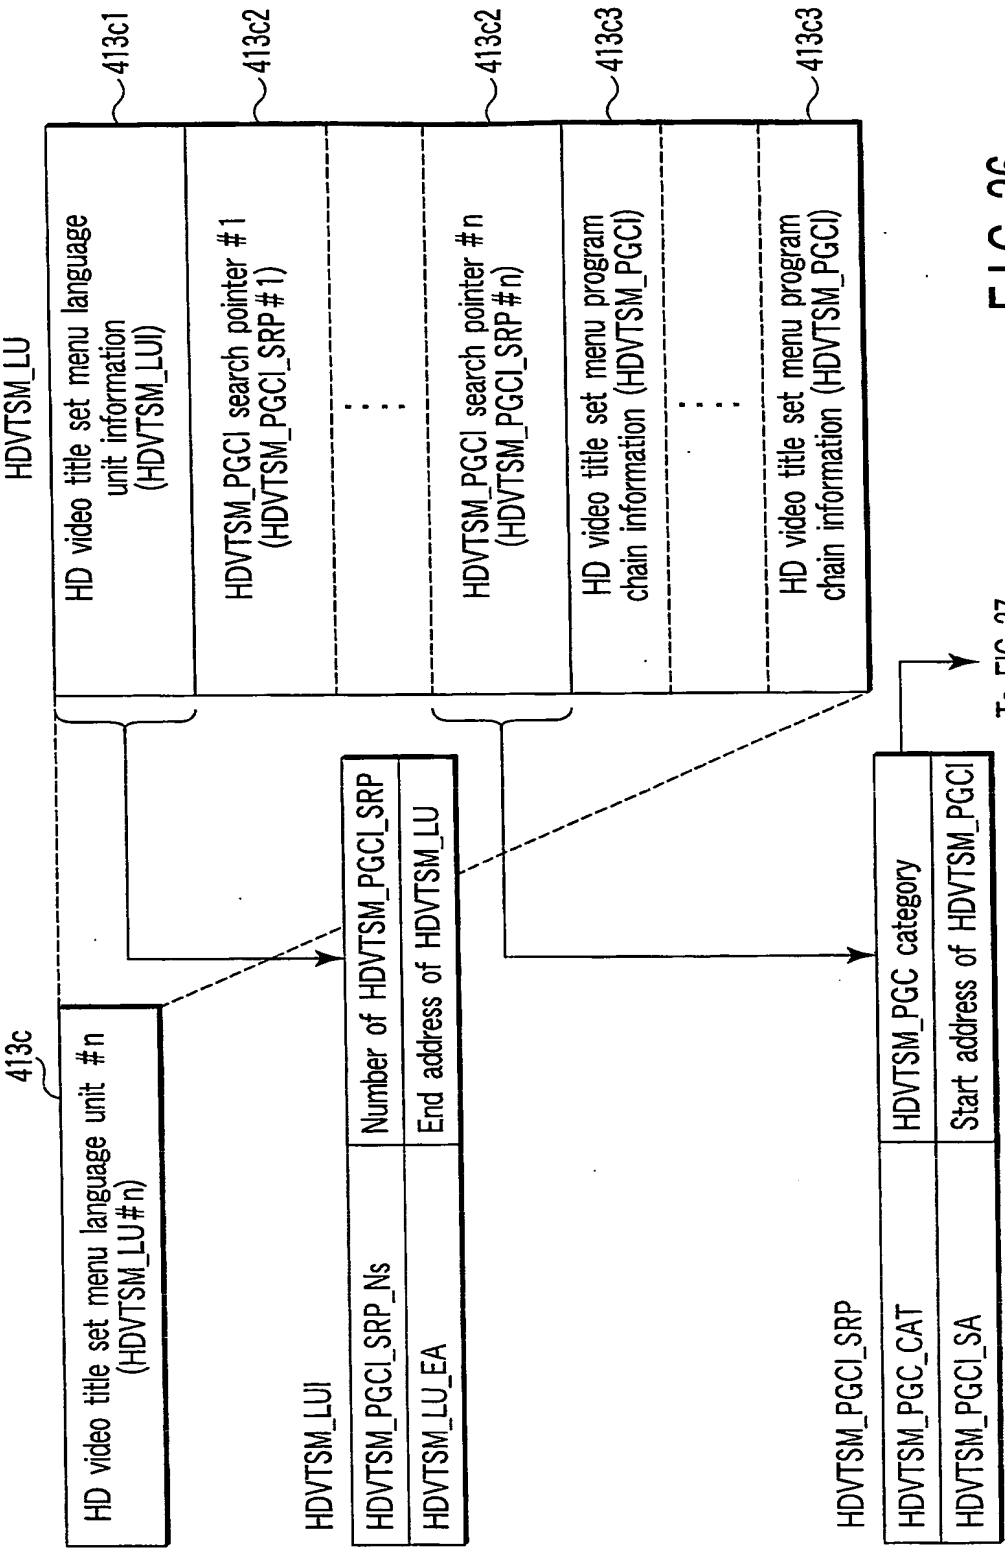


FIG. 26

HDTVSM\_PGC\_CAT

Byte \ Bit	b7	b6	b5	b4	b3	b2	b1	b0
0	Entry type	Reserved	Audio information selection		Menu ID			
1	Block mode		Block type		Audio information number			
2	PTL_ID_FLD (upper bit)							
3	PTL_ID_FLD (lower bit)							

Audio information selection  
Indicate selection of audio reproduction of HDMENU\_AOBS or HDTVSM\_VOBS, and start/end trigger of HDMENU\_AOBS  
...00b : Audio in VOB designated by PGC is reproduced (stop HDMENU\_AOBS)  
...10b : HDMENU\_AOBS is continuously reproduced (ignore audio in VOB)  
...11b : Reproduction of HDMENU\_AOBS is started (ignore audio in VOB)

Audio information number  
Designate AOB number #n to be reproduced in HDMENU\_AOBS

FIG. 27

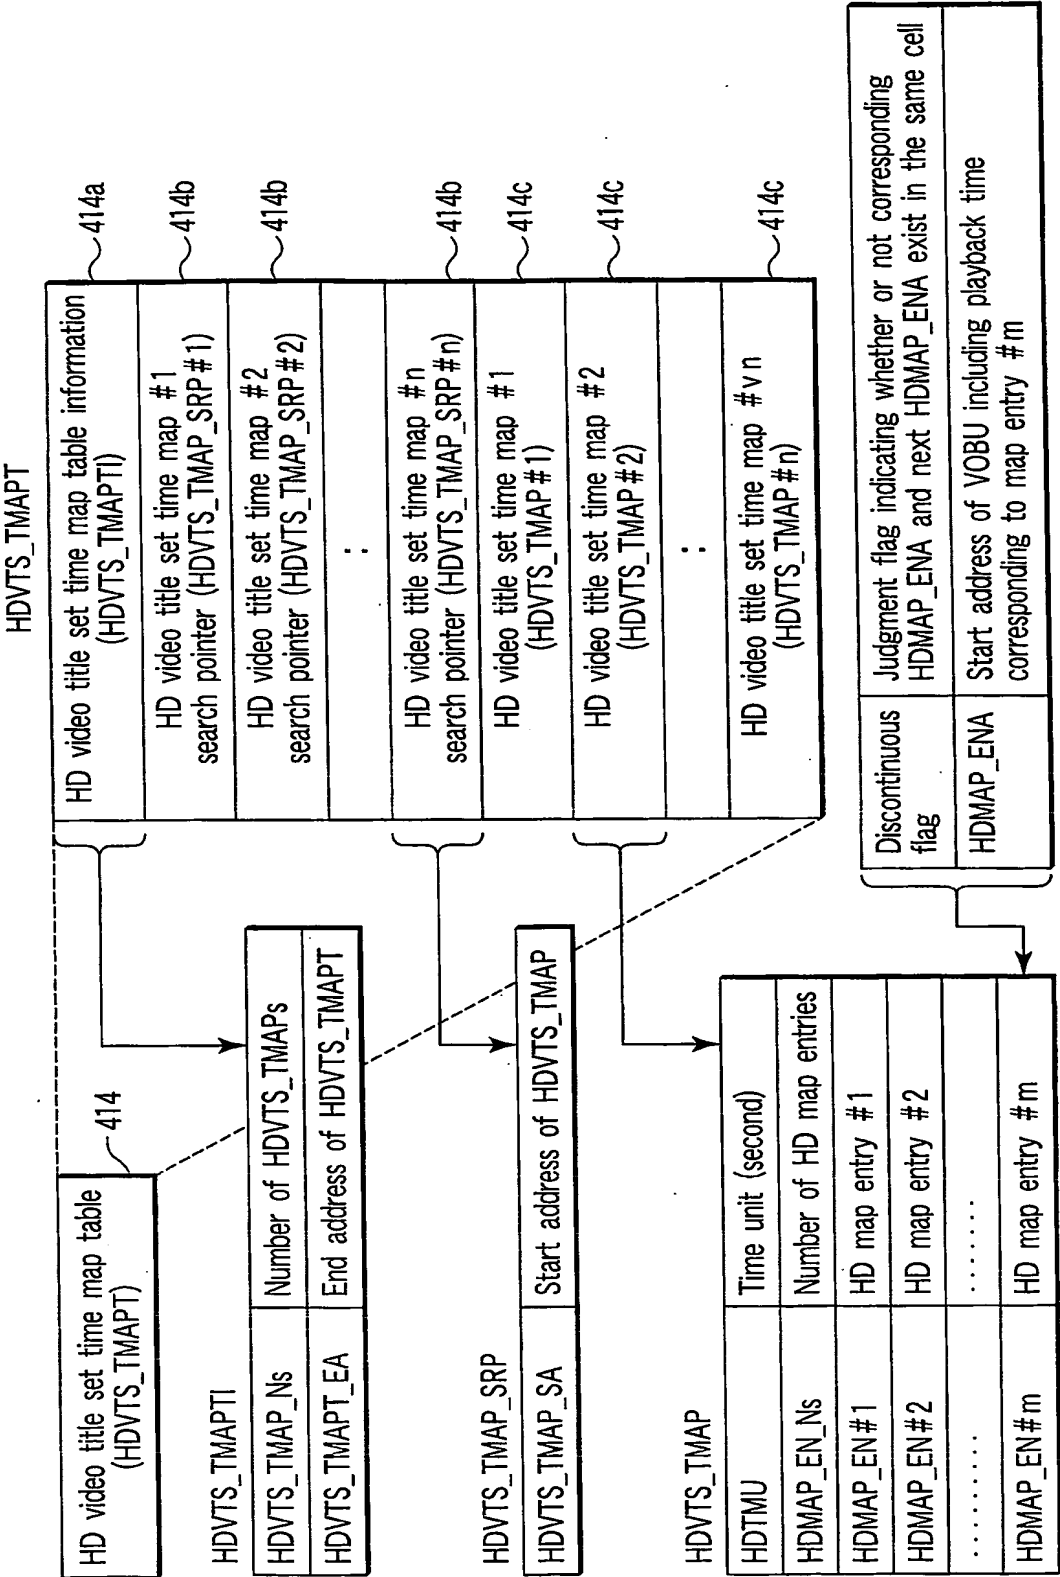


FIG. 28



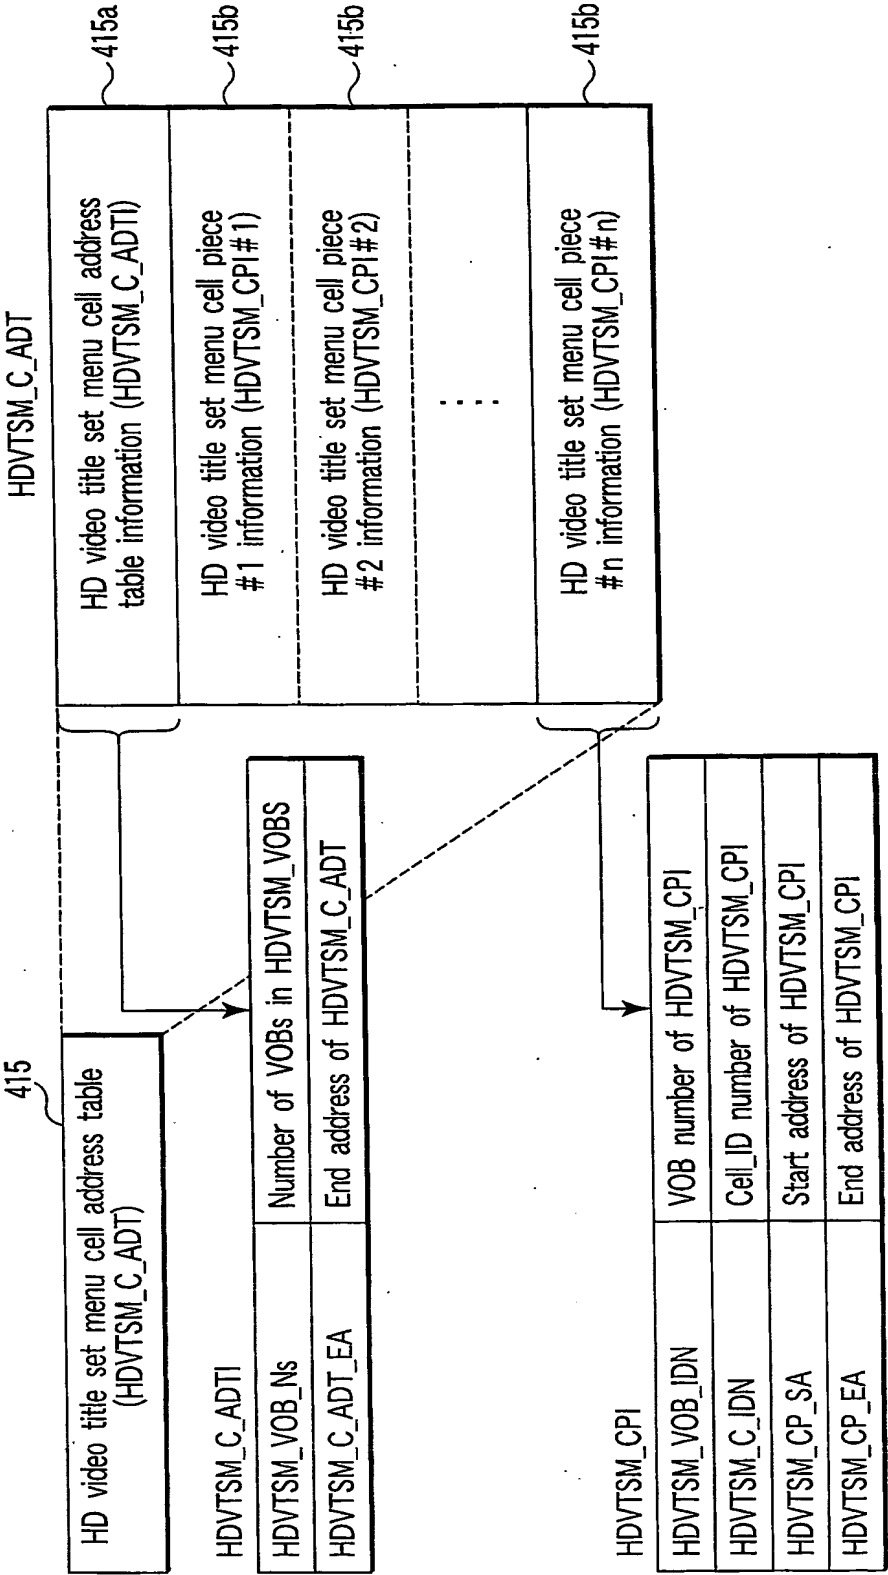


FIG. 29

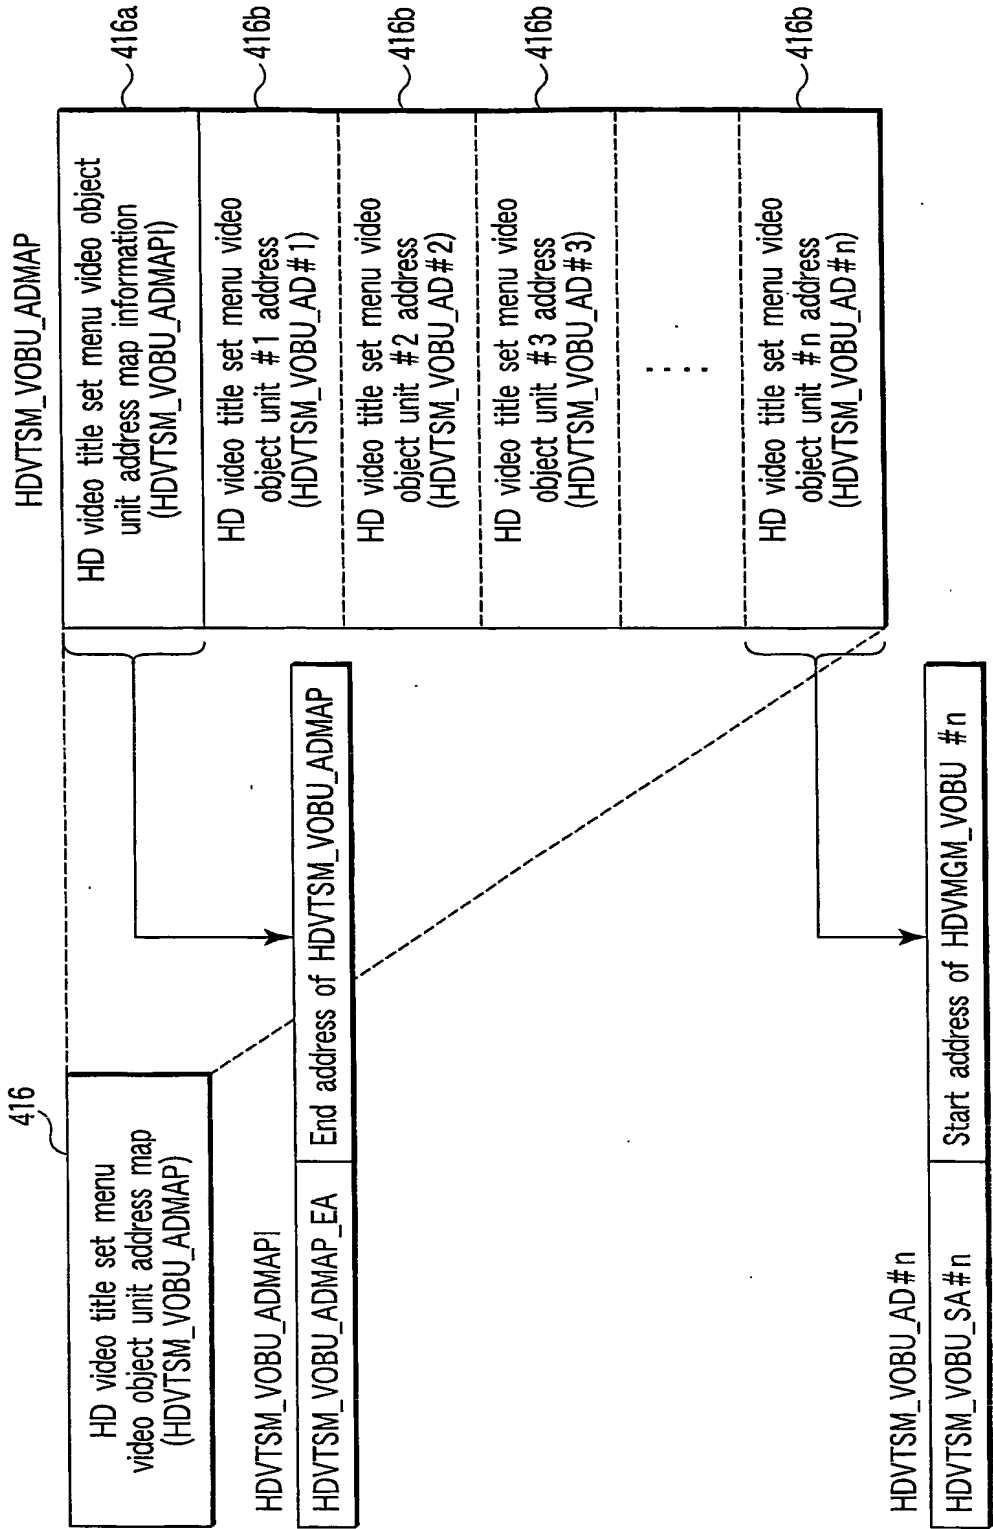


FIG. 30

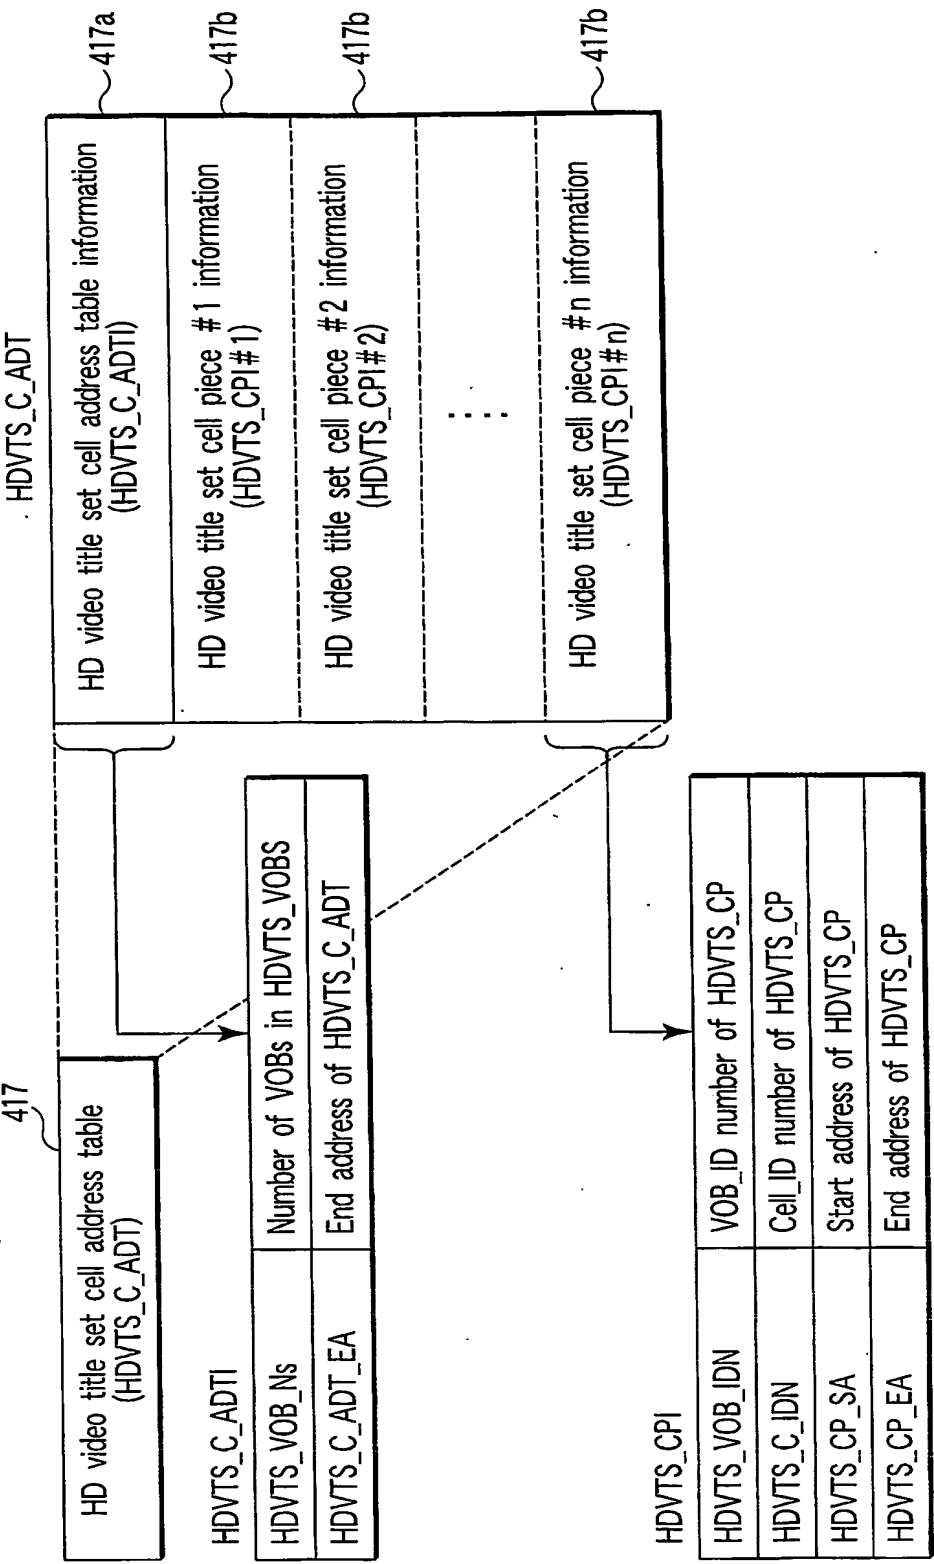


FIG. 31

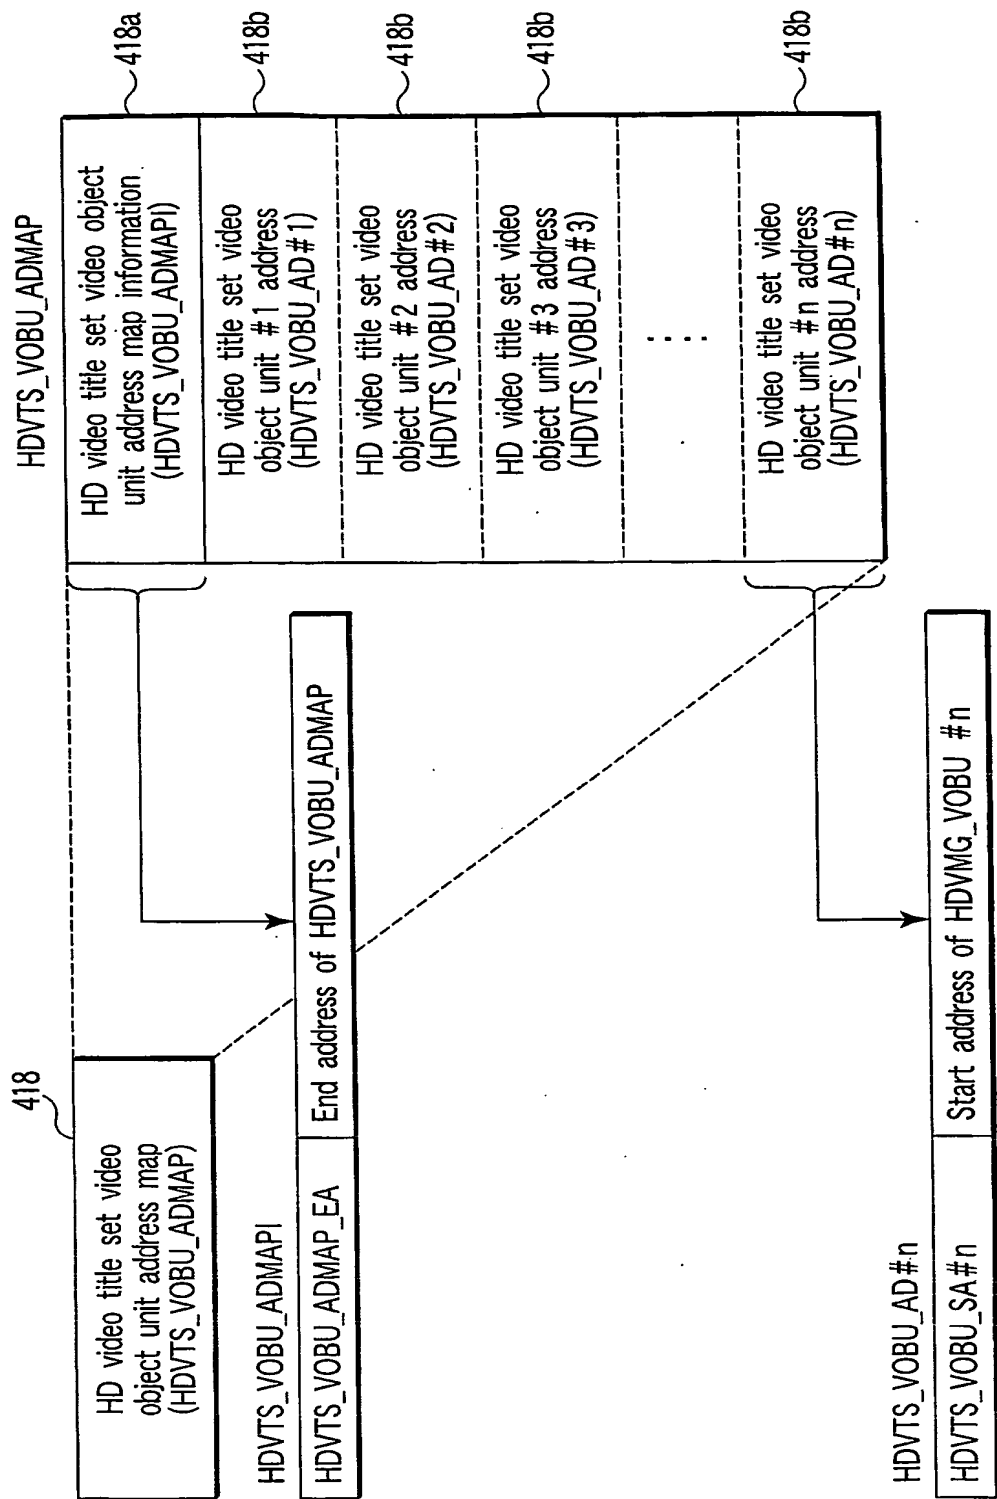


FIG. 32

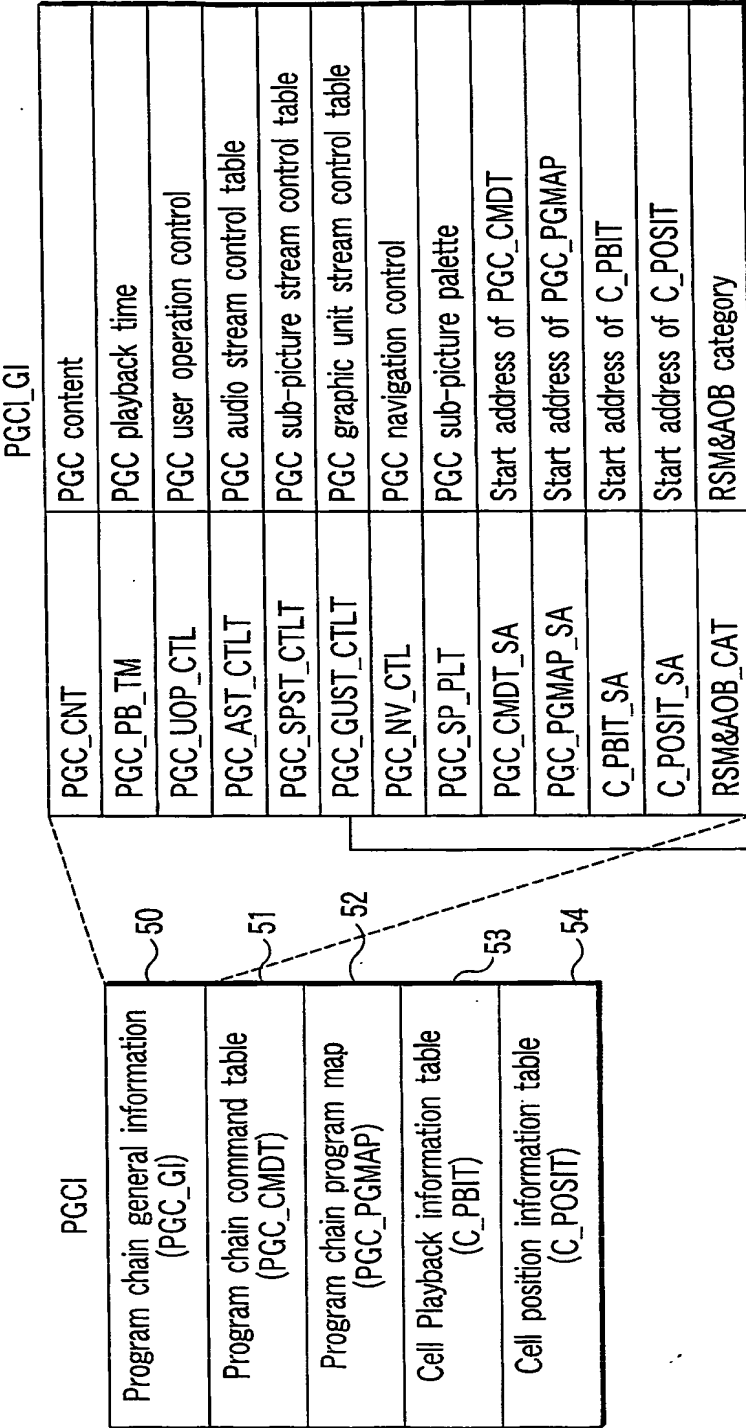


FIG. 33

33/54

## PGCI\_GI

PGC_CNT	PGC content
PGC_PB_TM	PGC playback time
PGC_UOP_CTL	PGC user operation control
PGC_AST_CTLT	PGC audio stream control table
PGC_SPST_CTLT	PGC sub-picture stream control table
PGC_GUST_CTLT	PGC graphic unit stream control table
PGC_NV_CTL	PGC navigation control
PGC_SP_PLT	PGC sub-picture palette
PGC_CMDT_SA	Start address of PGC_CMDT
PGC_PGMAP_SA	Start address of PGC_PGMAP
C_PBIT_SA	Start address of C_PBIT
C_POSIT_SA	Start address of C_POSIT
RSM&AOB_CAT	RSM&AOB category

## RSM&amp;AOB\_CAT

Bit Byte	b7	b6	b5	b4	b3	b2	b1	b0
0	Entry type	RSM permission	Audio selection		Audio number			
1	Block mode		Block type		Reserved			
2	PTL_ID_FLD (upper bit)							
3	PTL_ID_FLD (lower bit)							

## RSM permission

Indicate whether or not reproduction resume by RSM command or Resume () function is permitted by this PGC

...0b: Permission (update RSM information)

...1b: Prohibition (RSM information is not updated)

## PGC\_GUST\_CTLT

PGC_GUST#0	PGC_GUST_CTL of HD graphic unit stream #0
PGC_GUST#1	PGC_GUST_CTL of SD wide graphic unit stream #1
PGC_GUST#2	PGC_GUST_CTL of 4:3 graphic unit stream #2
PGC_GUST#3	PGC_GUST_CTL of letter box graphic unit stream #3

FIG. 34

34/54

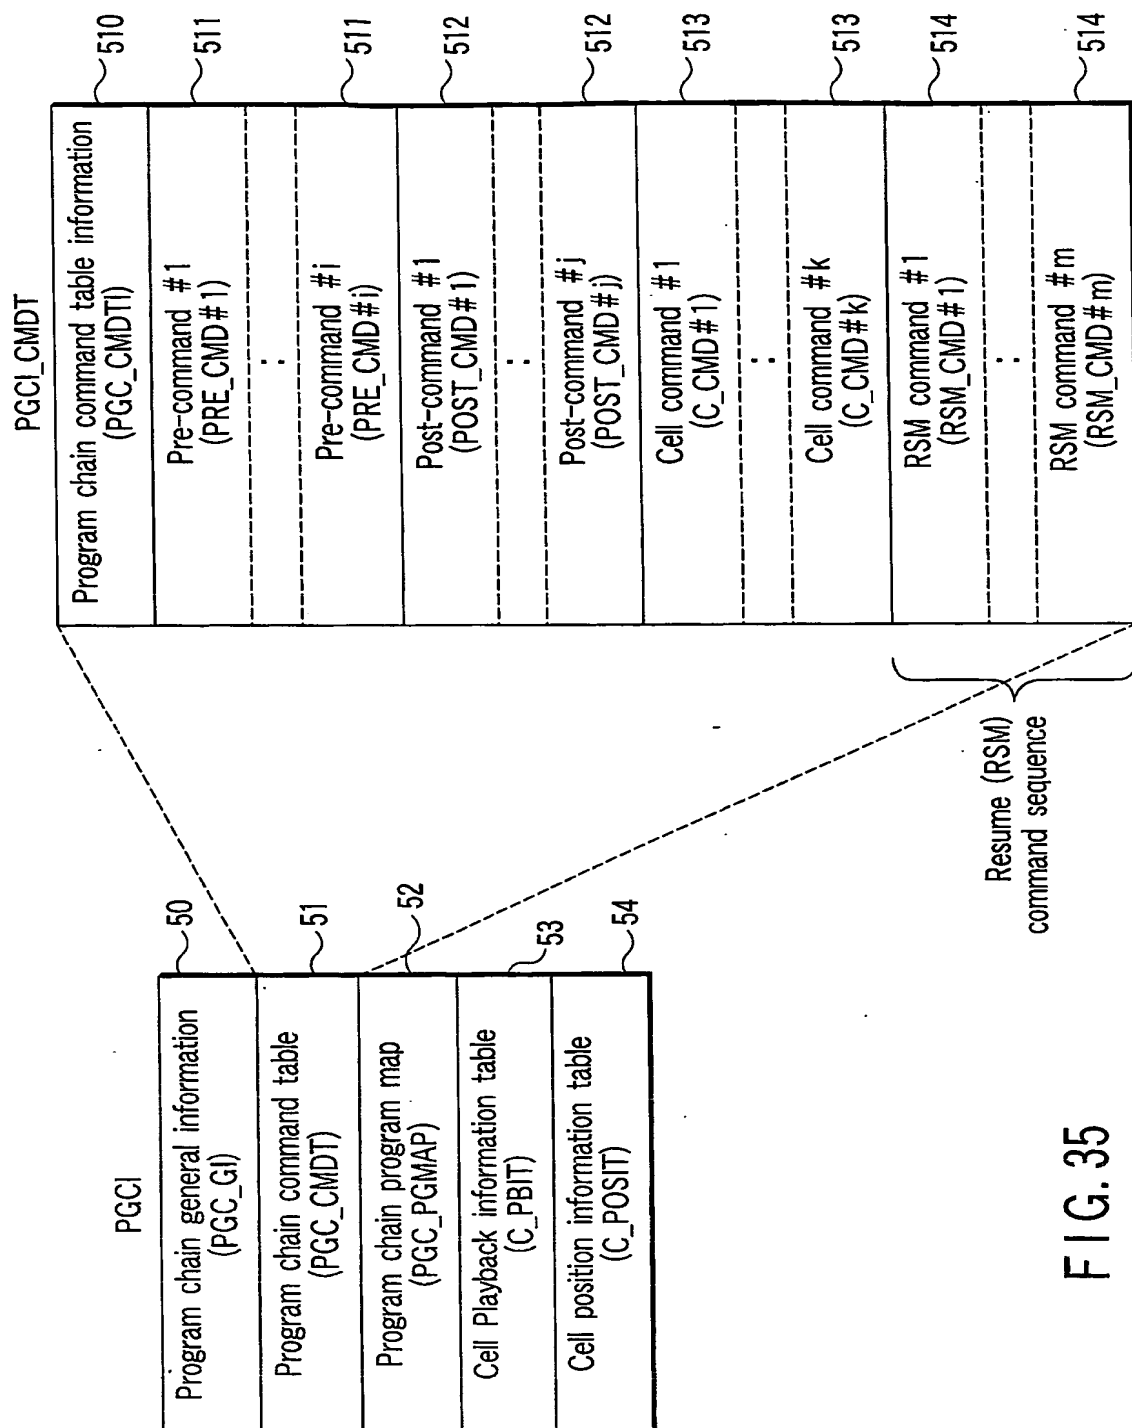
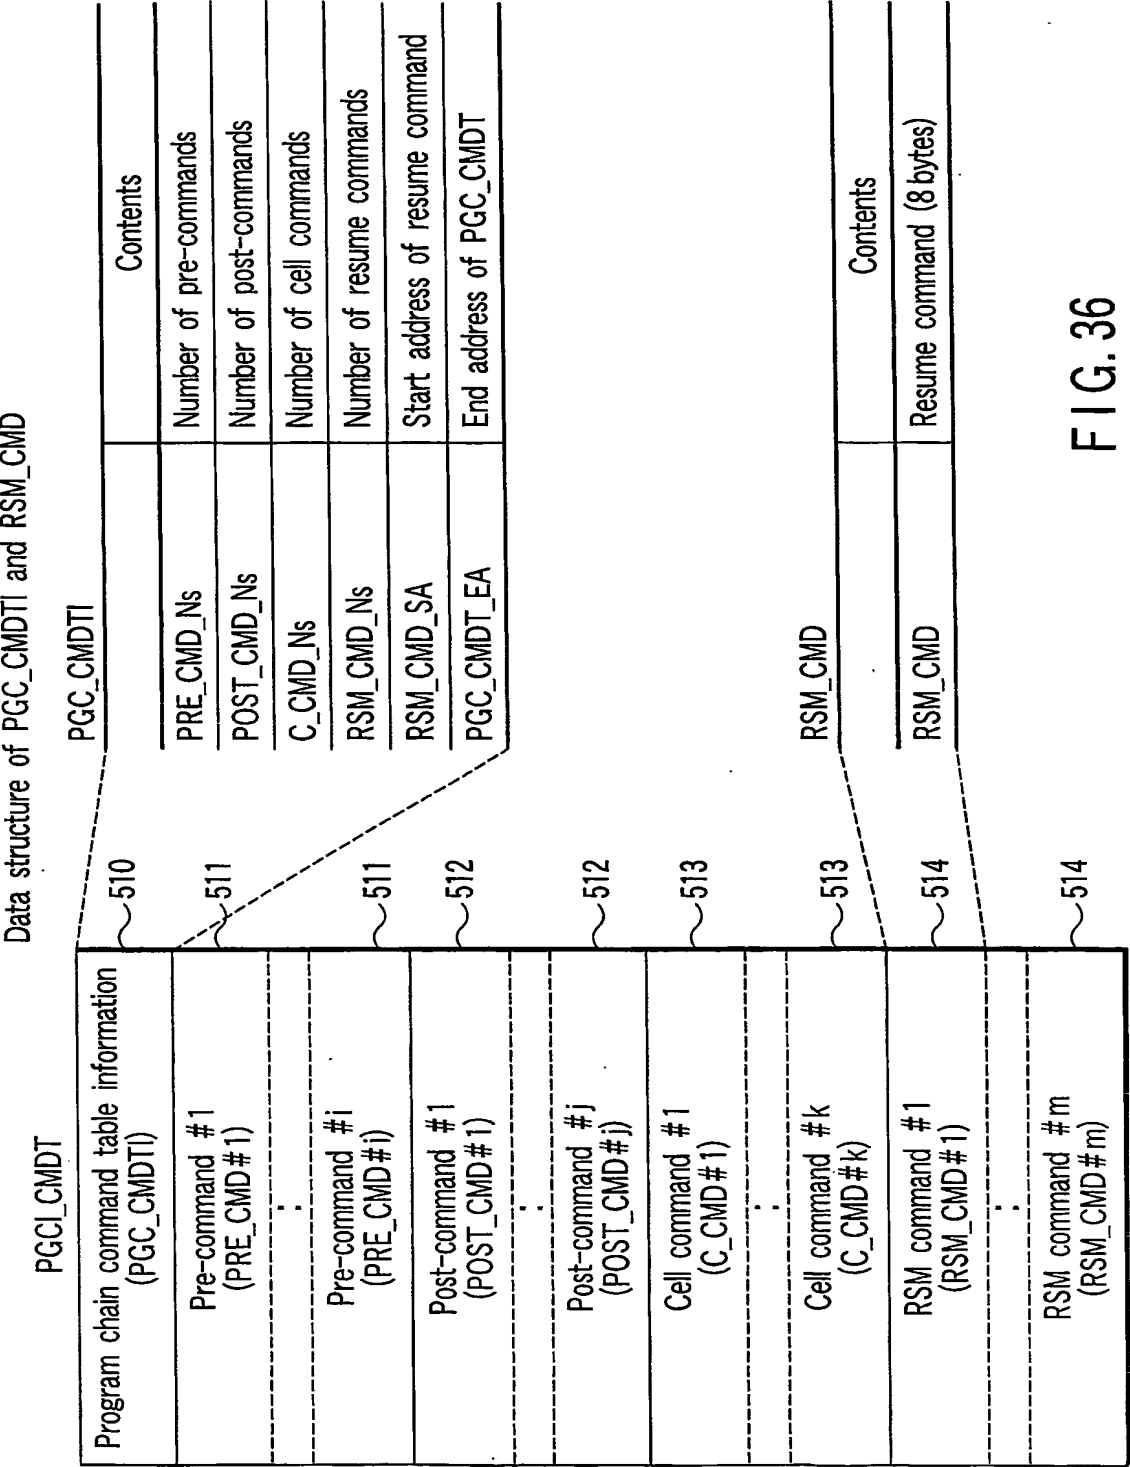


FIG. 35





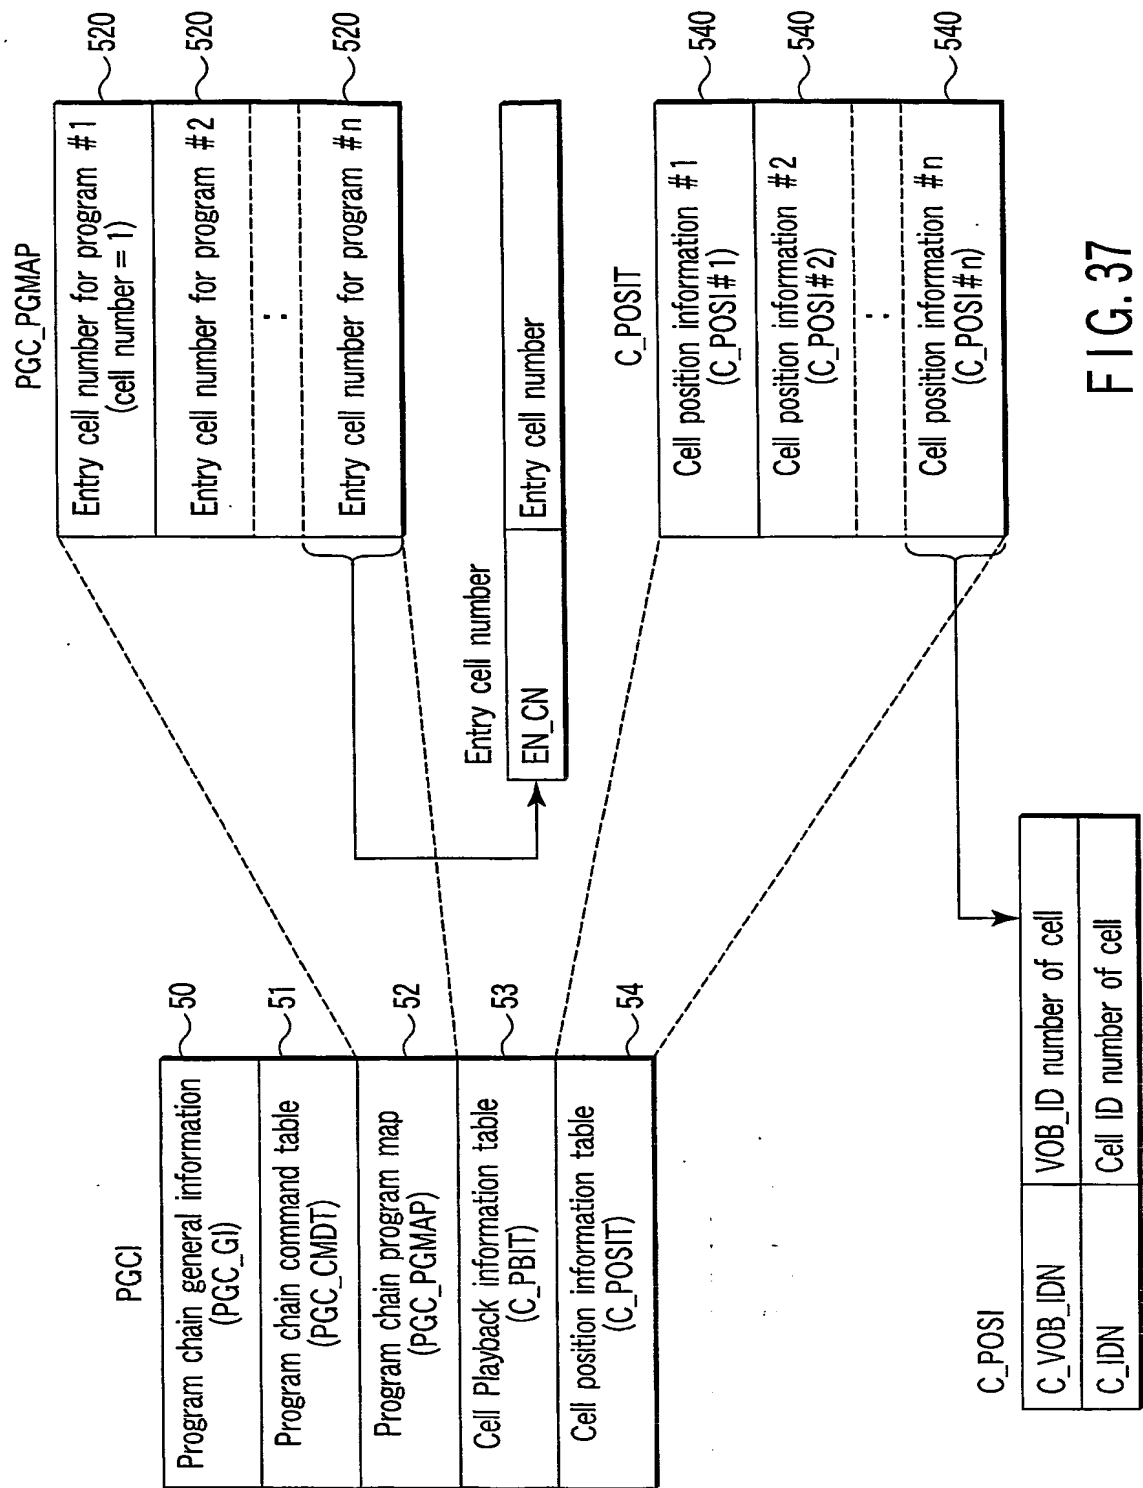


FIG. 37


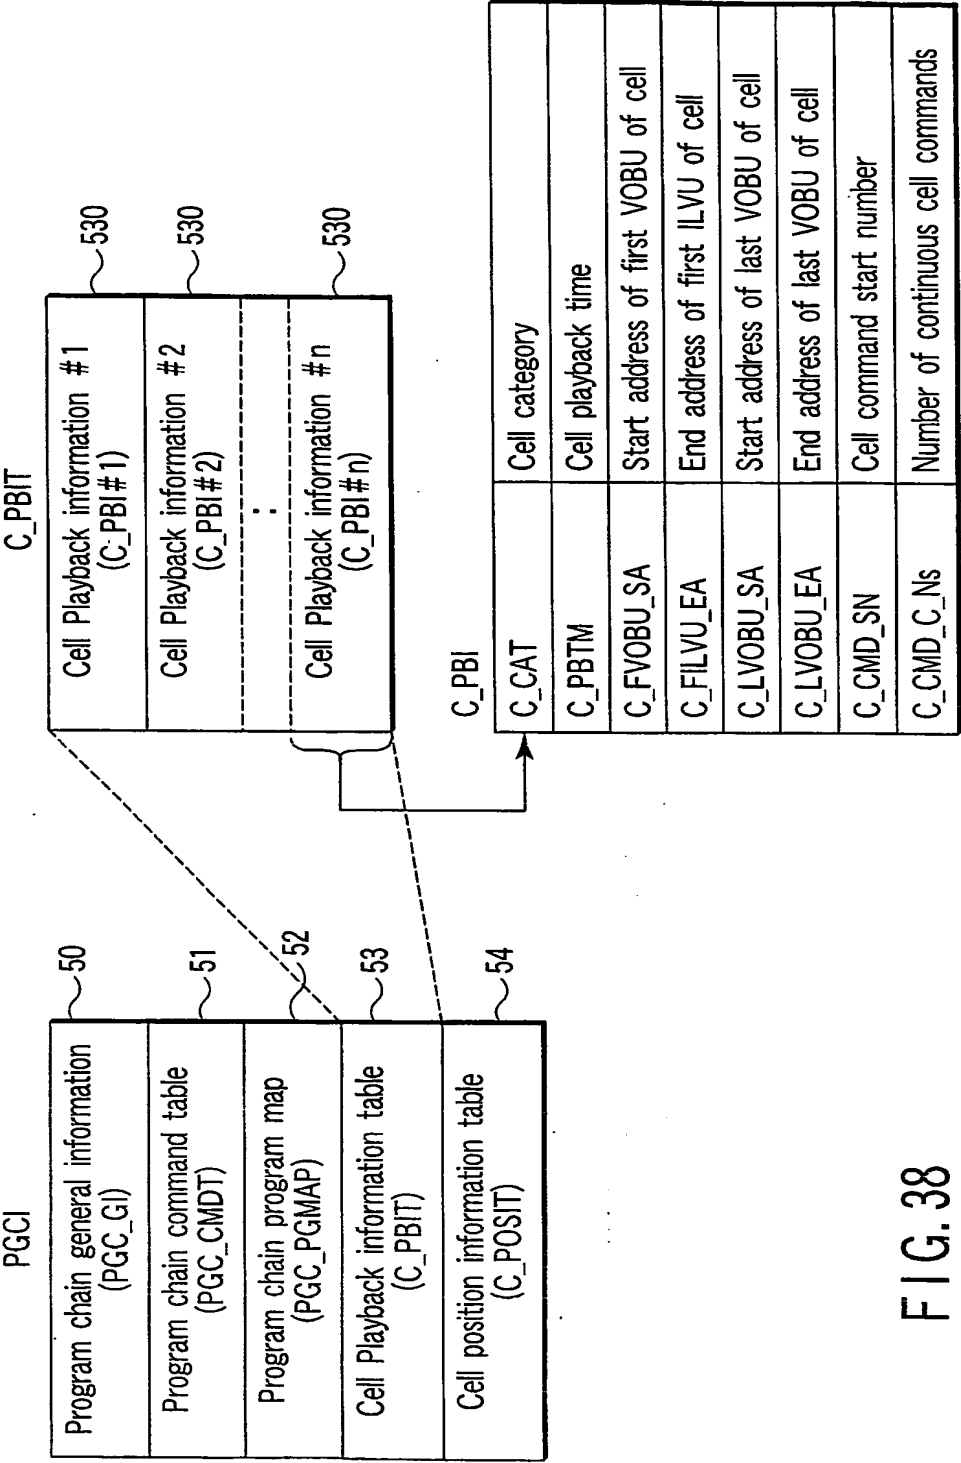


FIG. 38

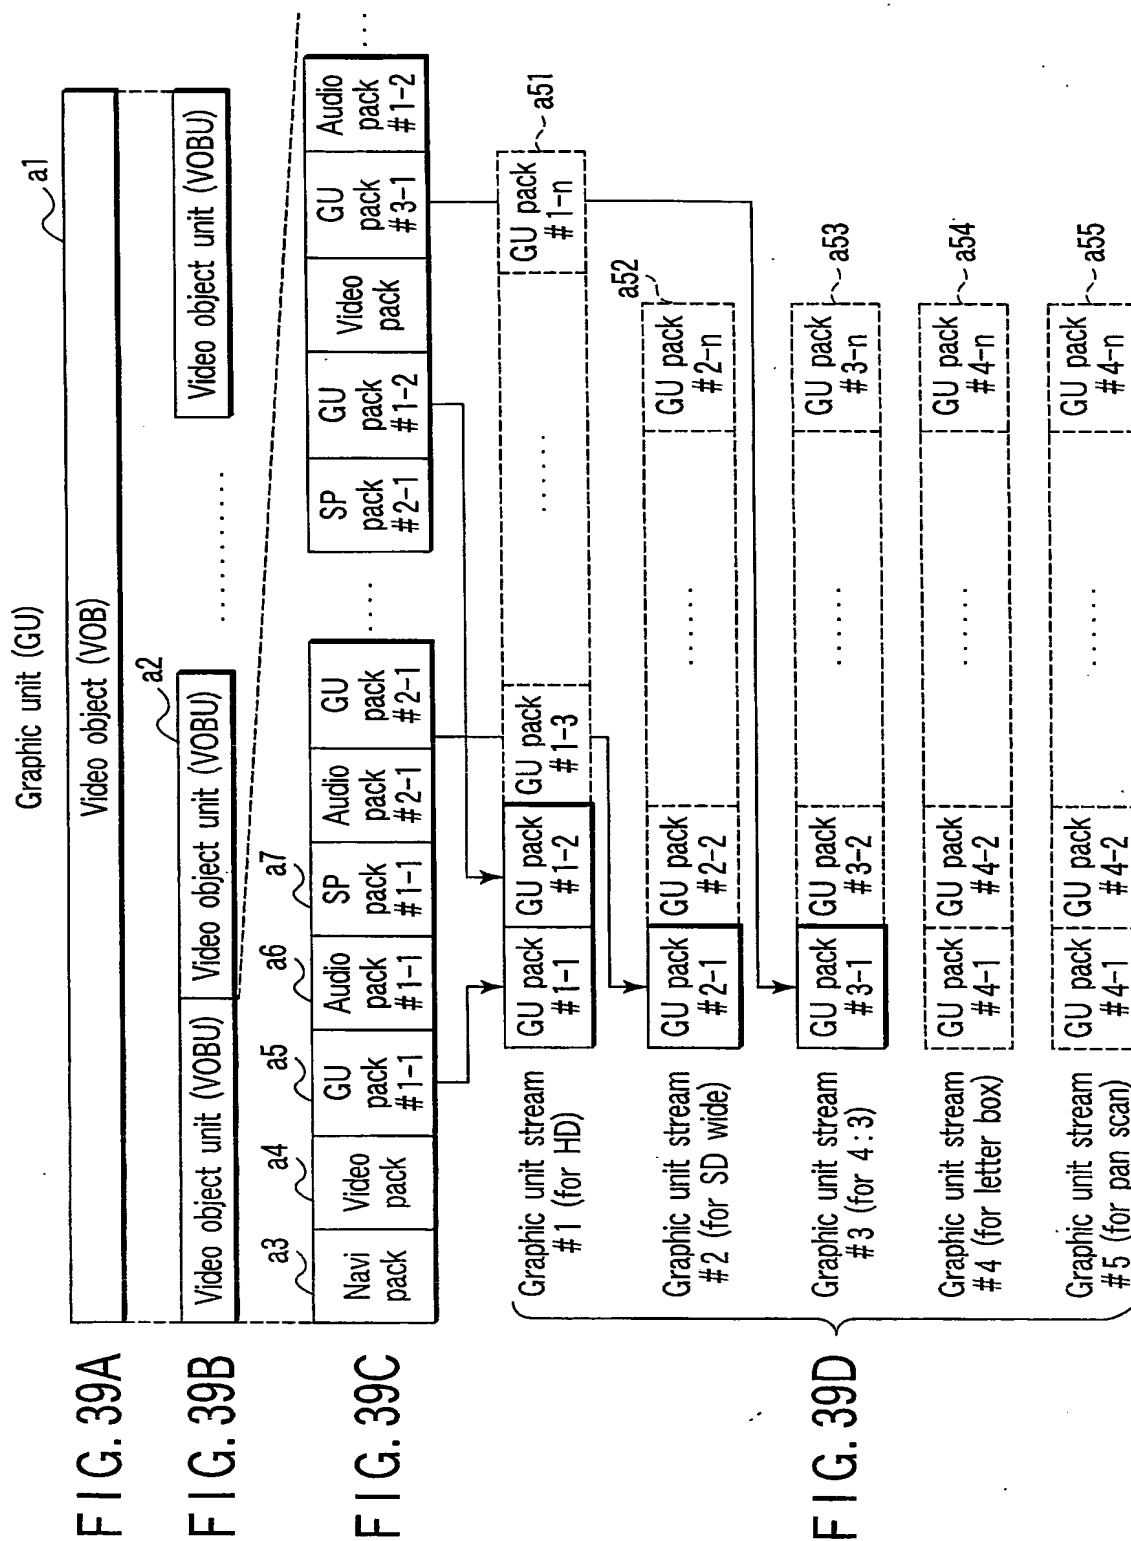

Sub-stream ID of graphic unit stream

Private stream 1: 1011 1101b

Sub-stream ID 0101 0xxb	Graphic stream number	Contents
0101 0001b	1	Graphic unit for HD
0101 0010b	2	Graphic unit for SD wide
0101 0011b	3	Graphic unit for 4 : 3
0101 0100b	4	Graphic unit for letter box
0101 0101b	5	Graphic unit for pan scan

FIG. 40

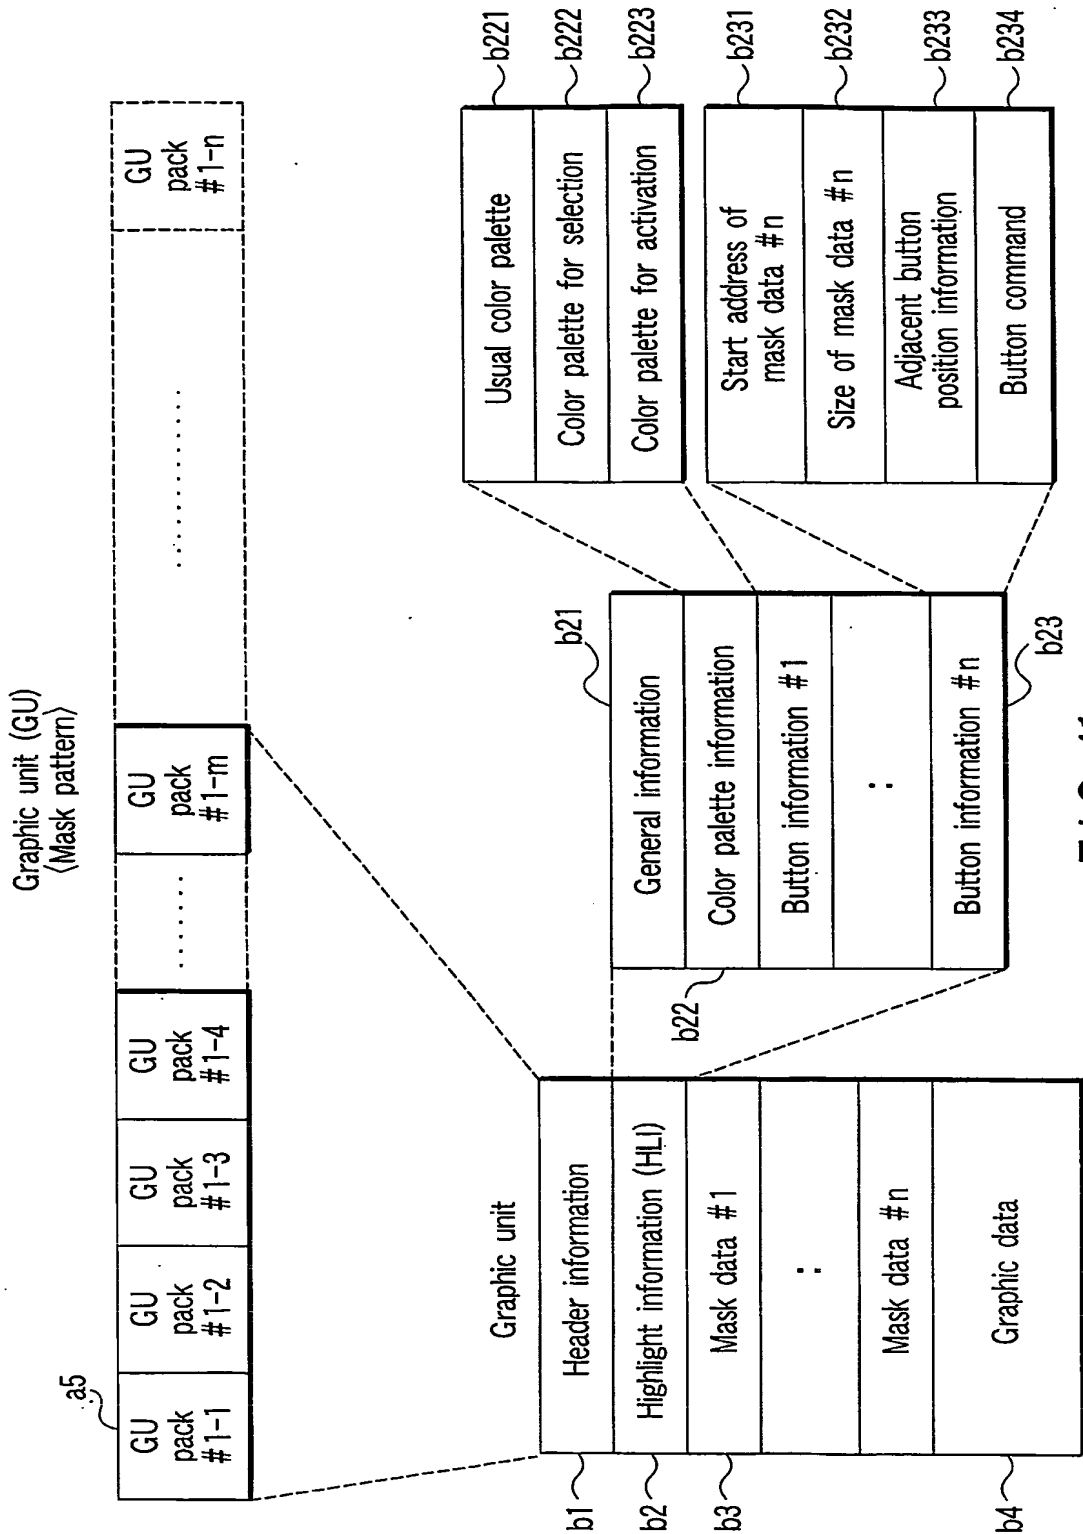


FIG. 41

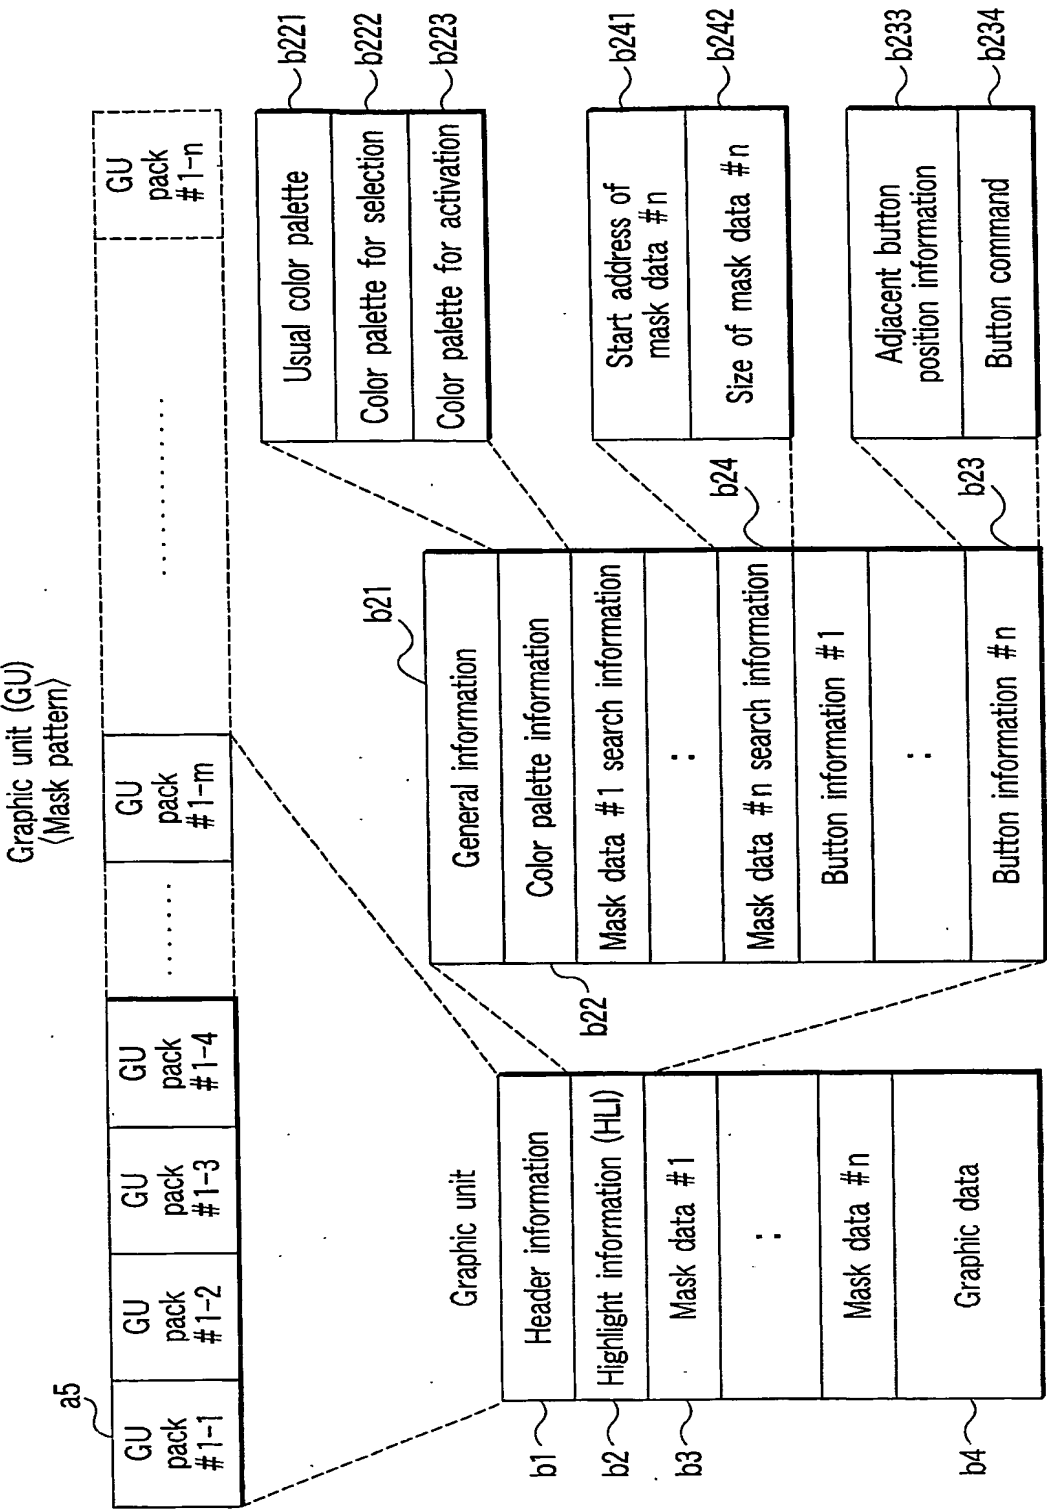


FIG. 42

42/54

## Information in graphic unit

## Header information

b1

GU_SZ	Graphic unit size
GU_ATRI	Graphic unit attribute information
HLI_SA	Start address of highlight information (HLI)
GD_SA	Start address of graphic data

FIG. 43A

## General information

b21

GU_PB_S_PTM	Playback start time of graphic unit
GU_PB_E_PTM	Playback end time of graphic unit
BTN_OFN	Button offset number
BTN_Ns	Button number
NSL_BTN_Ns	Number of number selection buttons
FOSL_BTNN	Forced selection button number
FOAC_BTNN	Forced activation button number

FIG. 43B

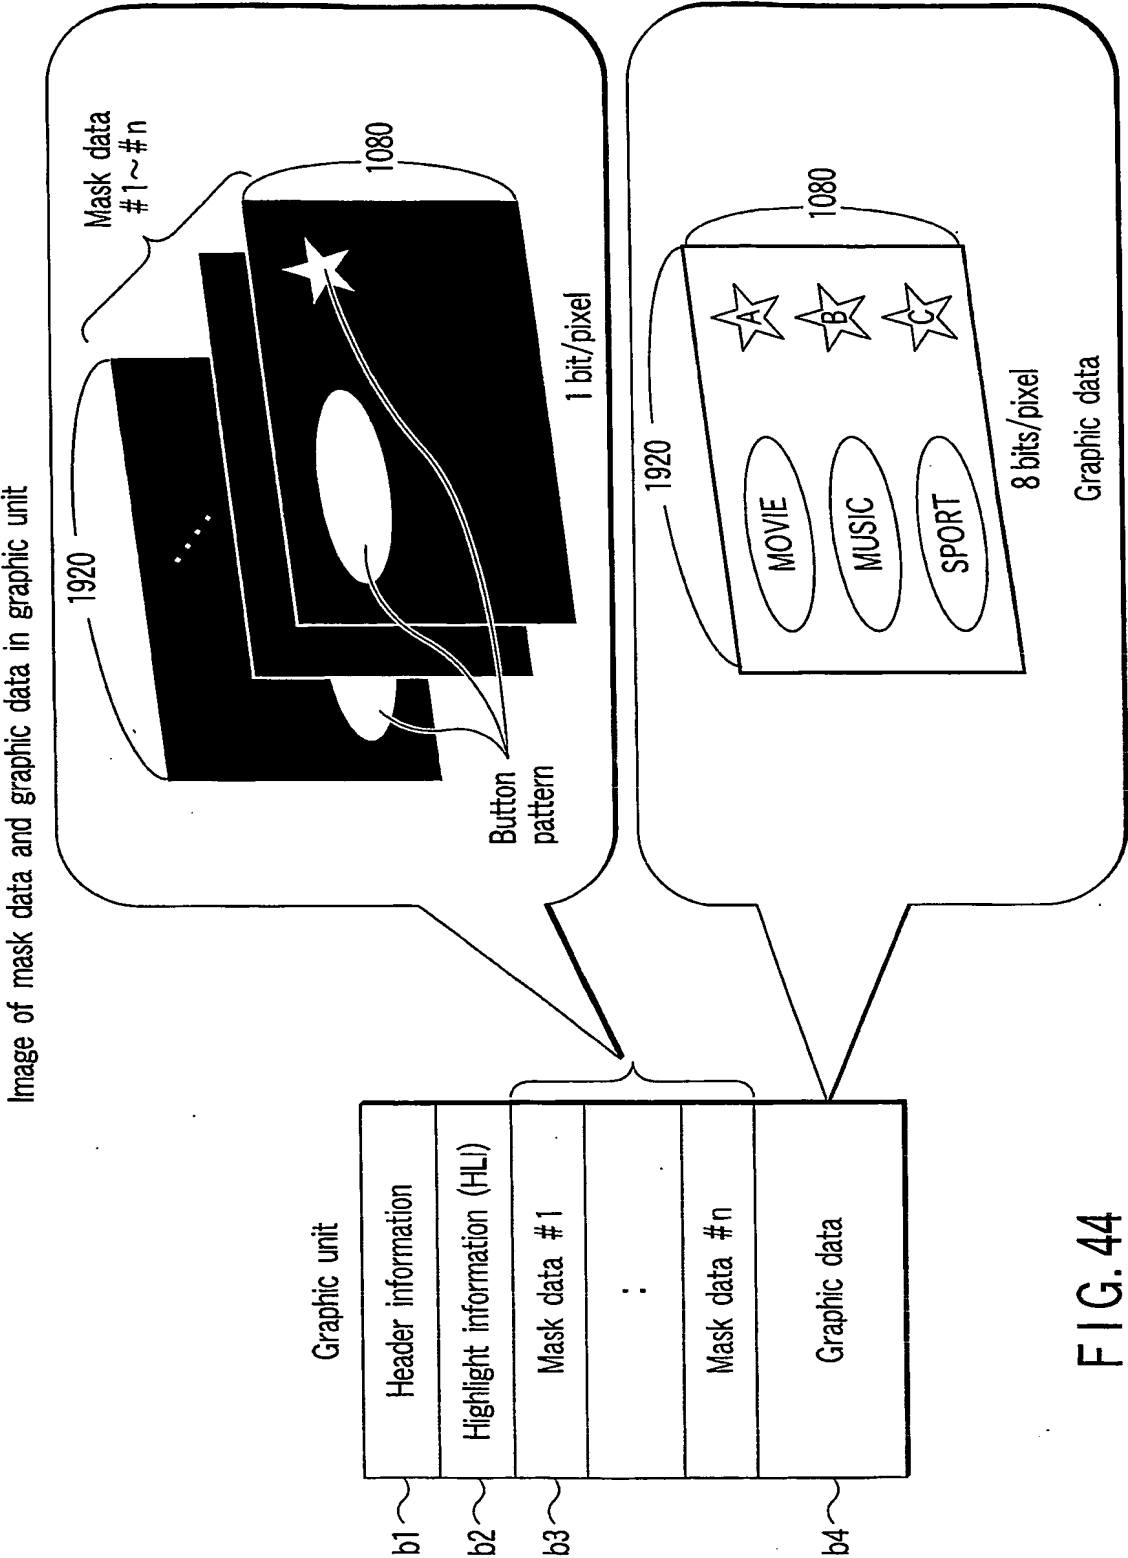


FIG. 44



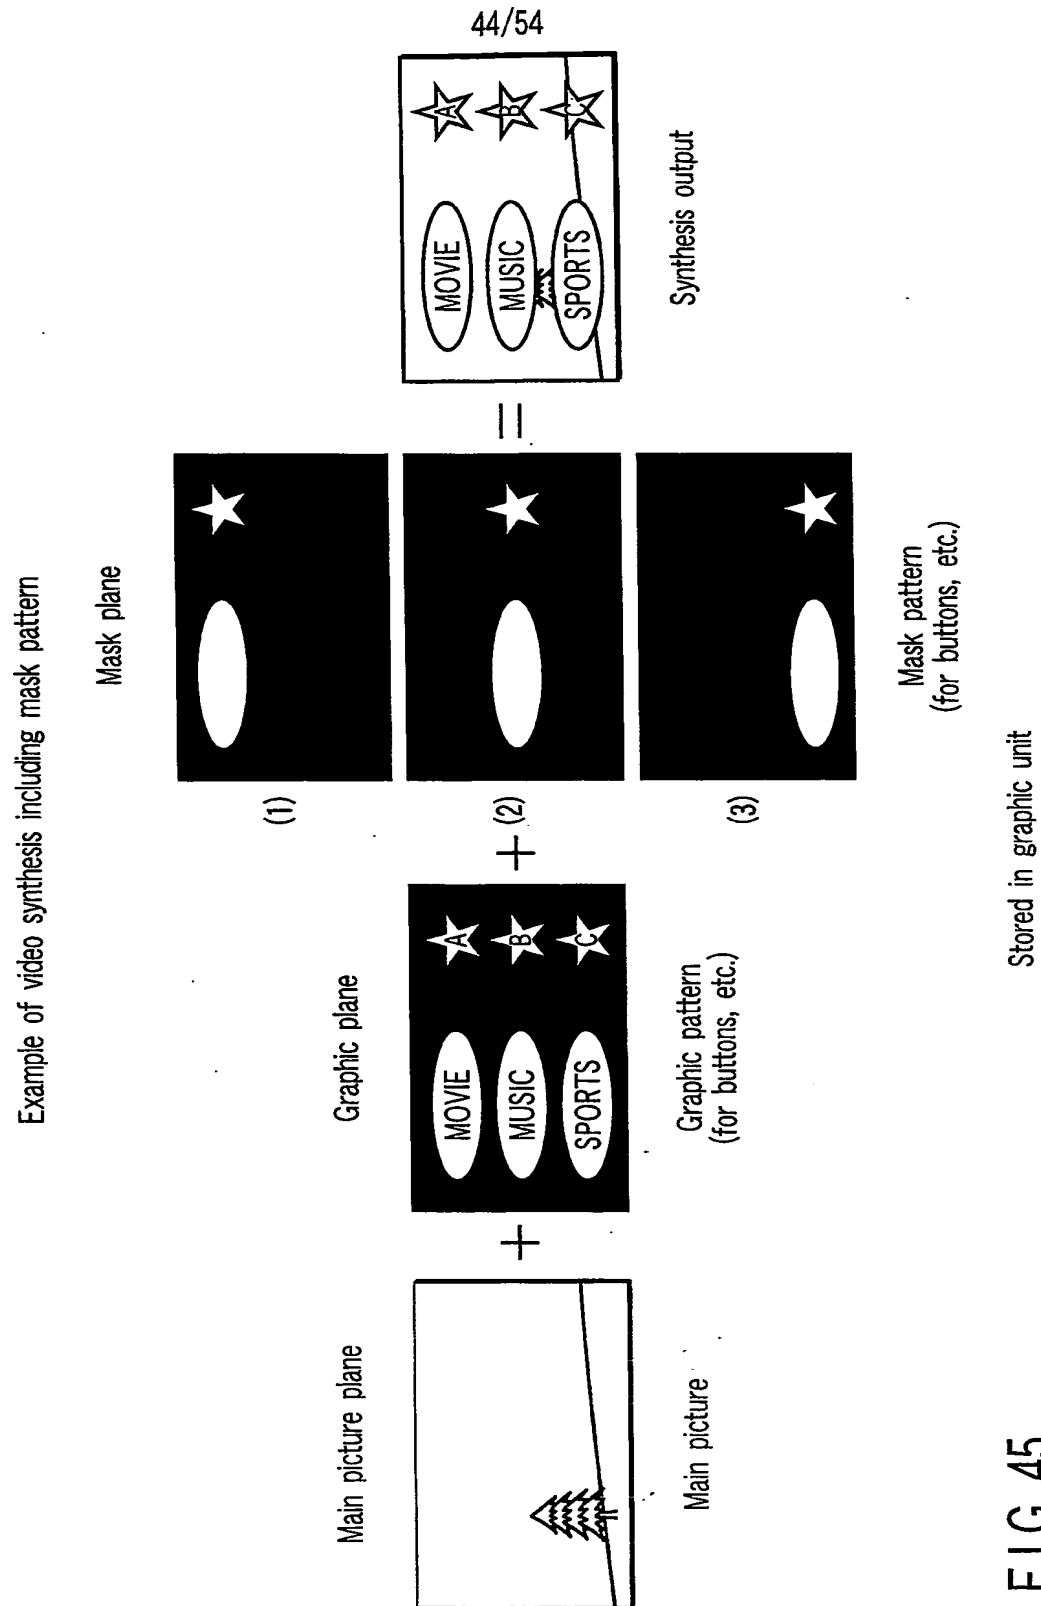


FIG. 45

Example of color/contrast information table

Usual color palette			Color palette for selection			Color palette for activation	
	Color (R,G,B)	Contrast	Color (R,G,B)	Contrast		Color (R,G,B)	Contrast
00h	Black	Opaque (00h)	Black	Opaque (00h)		Black	Opaque (00h)
01h	Gray	Transparent (FFh)	Gray	Transparent (FFh)		Gray	Transparent (FFh)
:	:	:	:	:		:	:
80h	Red ( R : FFh, G : 00h, B : 00h )	Translucent (80h)	Blue ( R : 00h, G : 00h, B : FFh )	Translucent (80h)		Green ( R : 00h, G : FFh, B : 00h )	Translucent (80h)
:	:	:	:	:		:	:
FFh	White	Transparent (FFh)	White	Transparent (FFh)		White	Transparent (FFh)

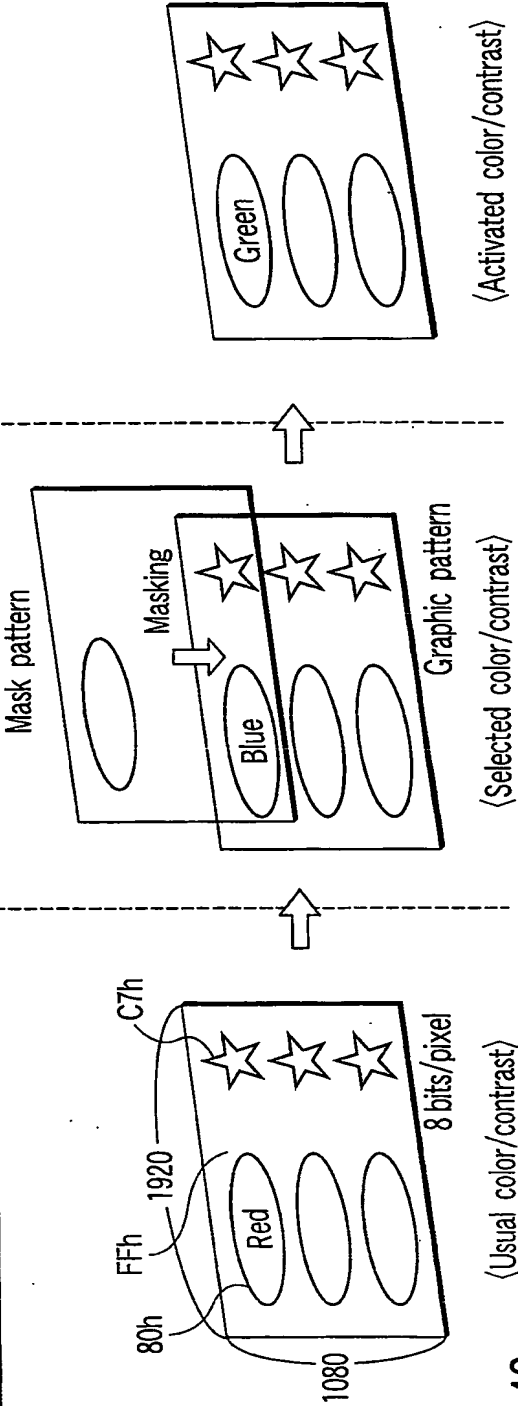


FIG. 46

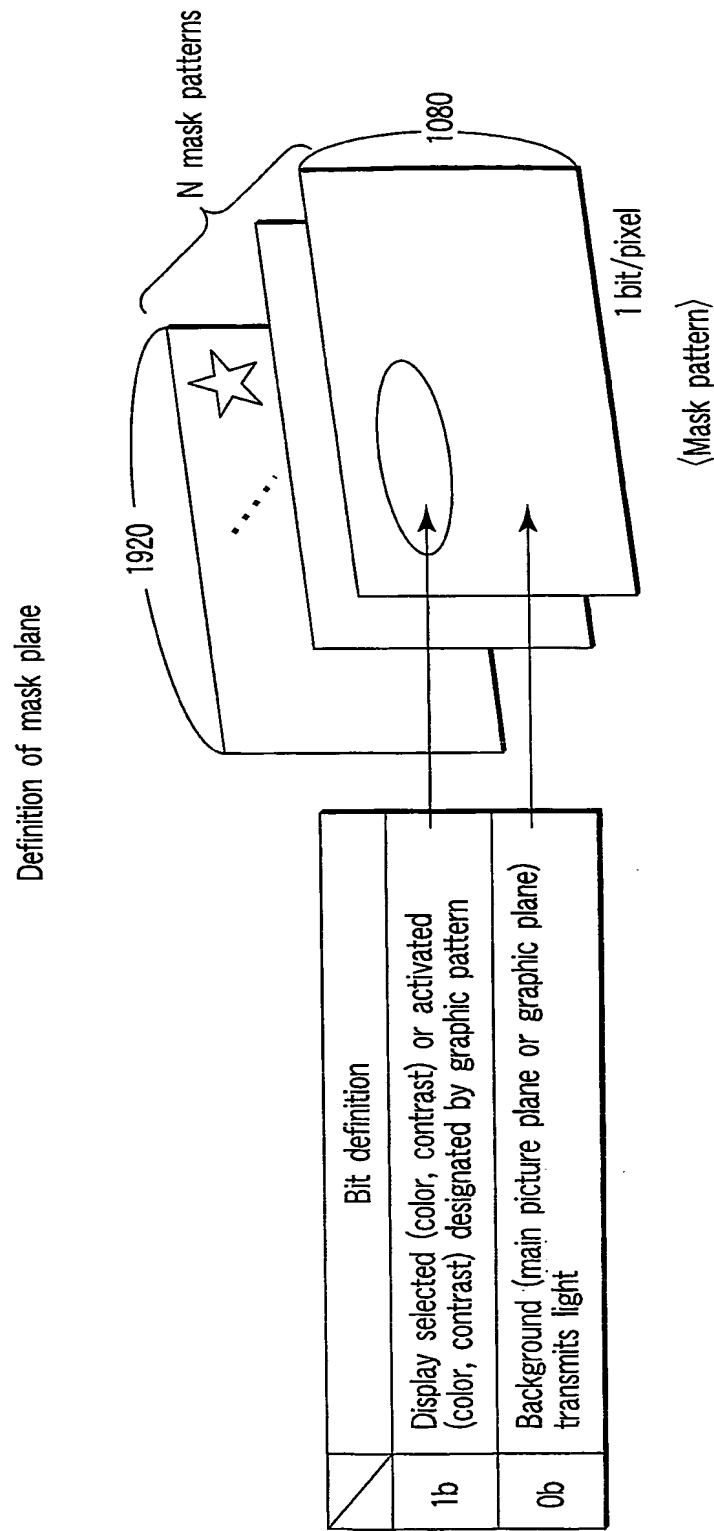
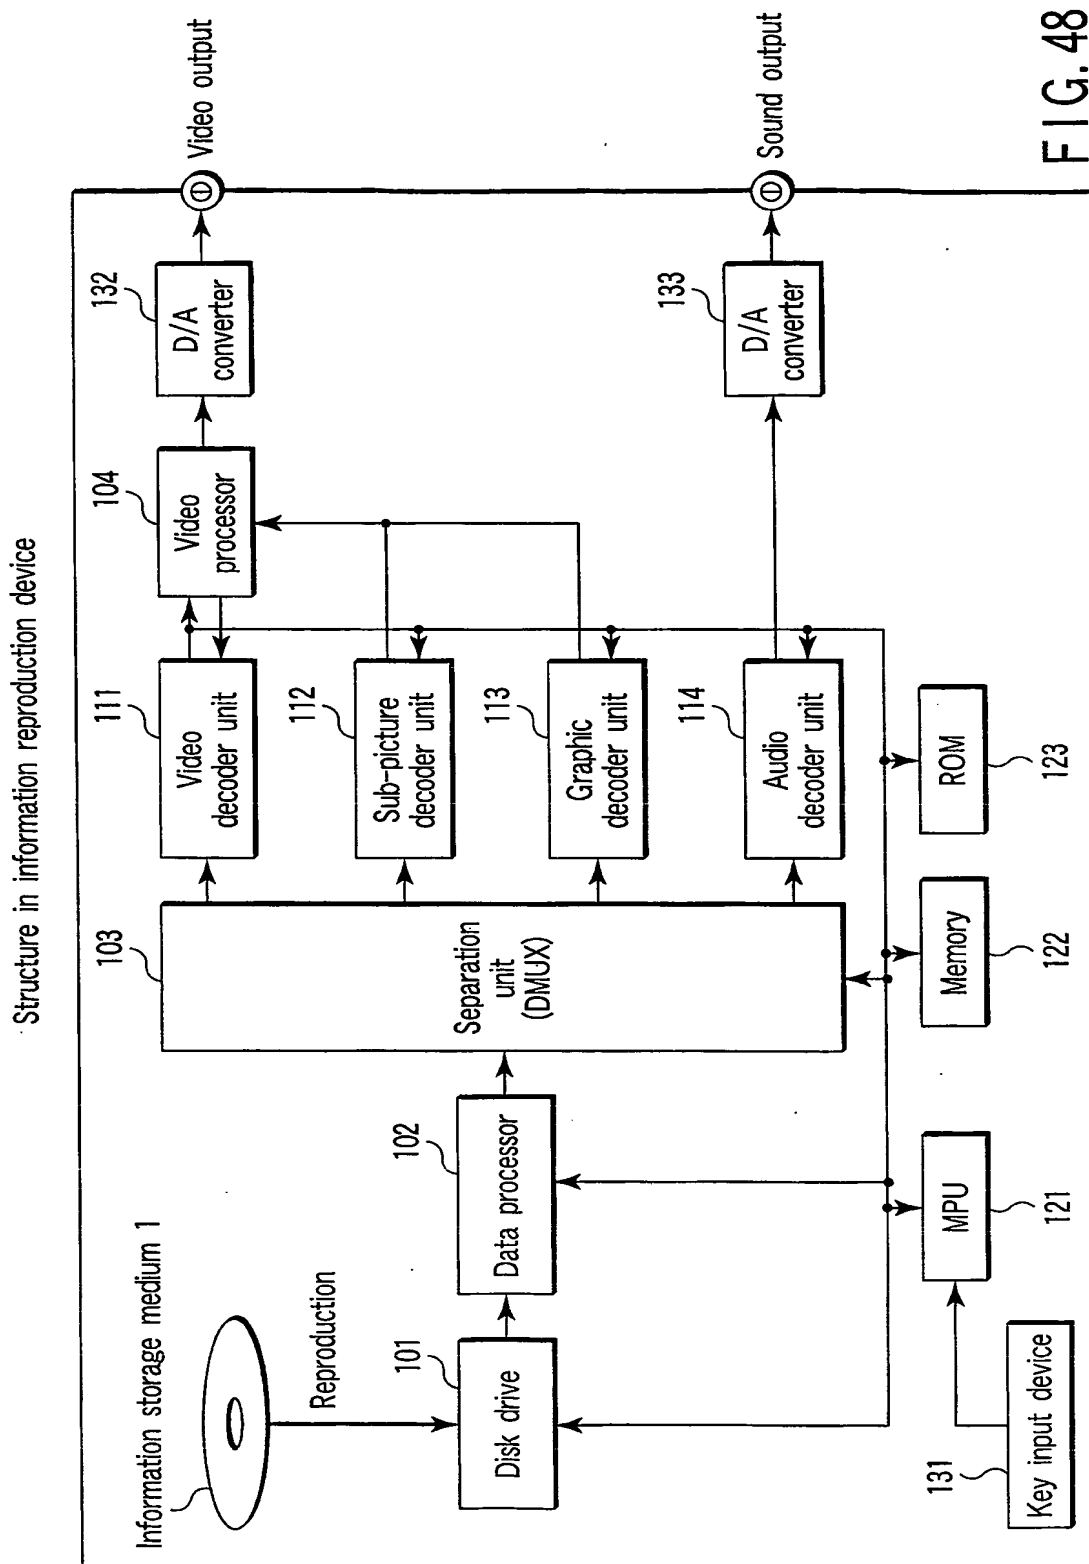


FIG. 47

47/54



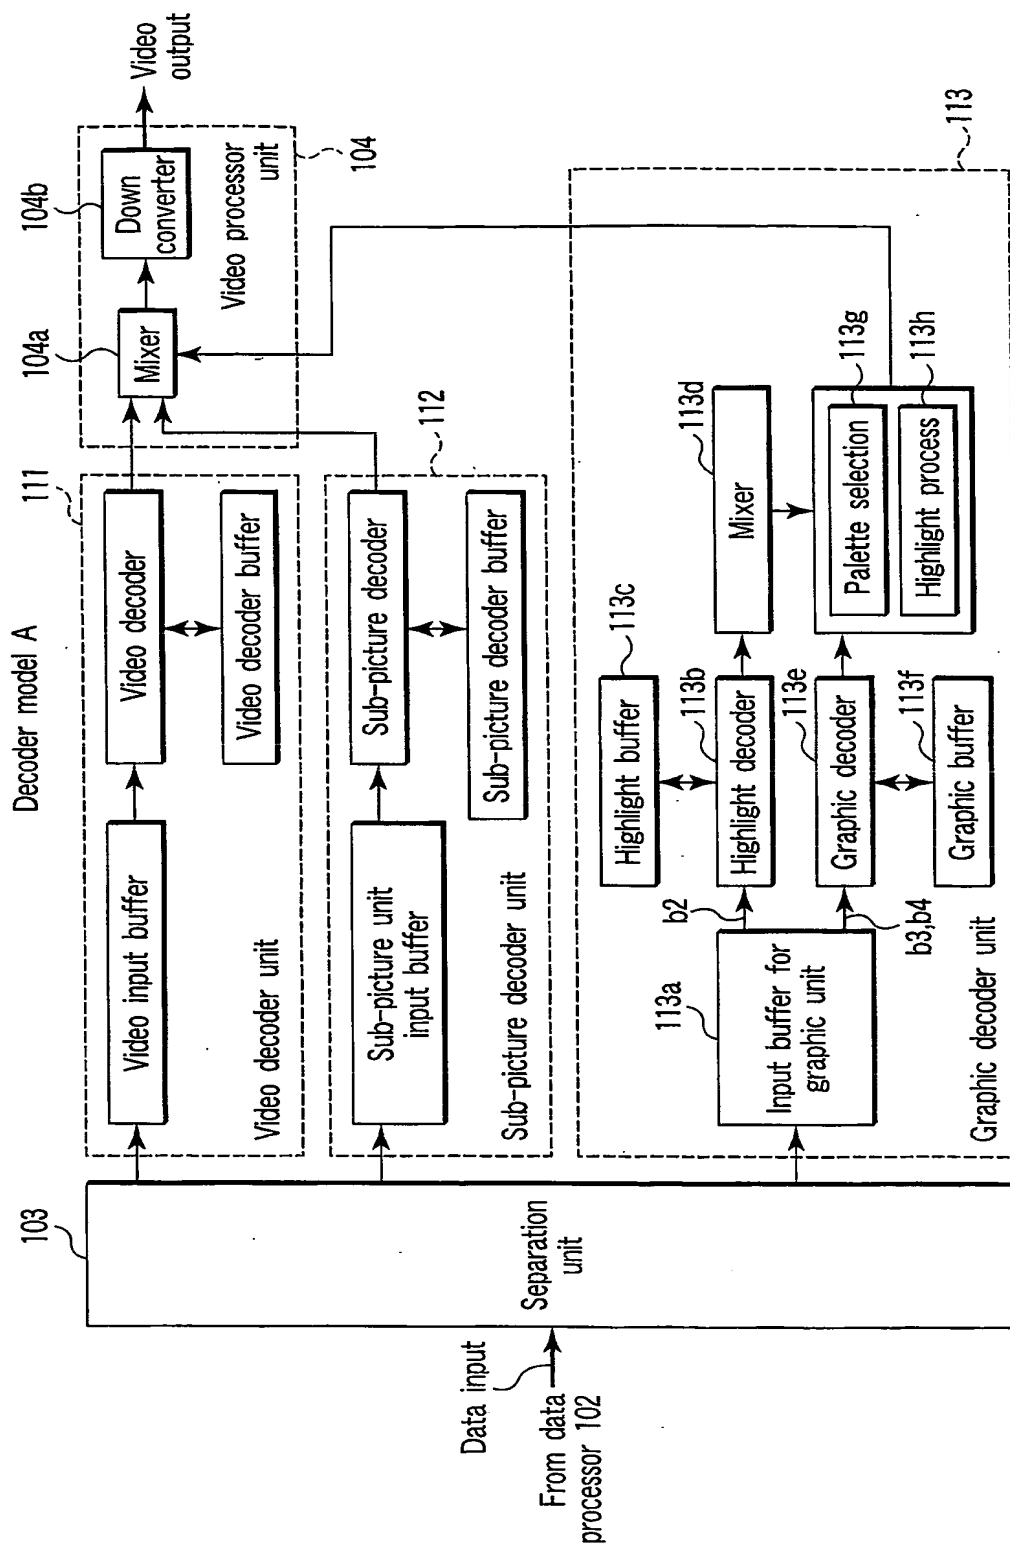


FIG. 49

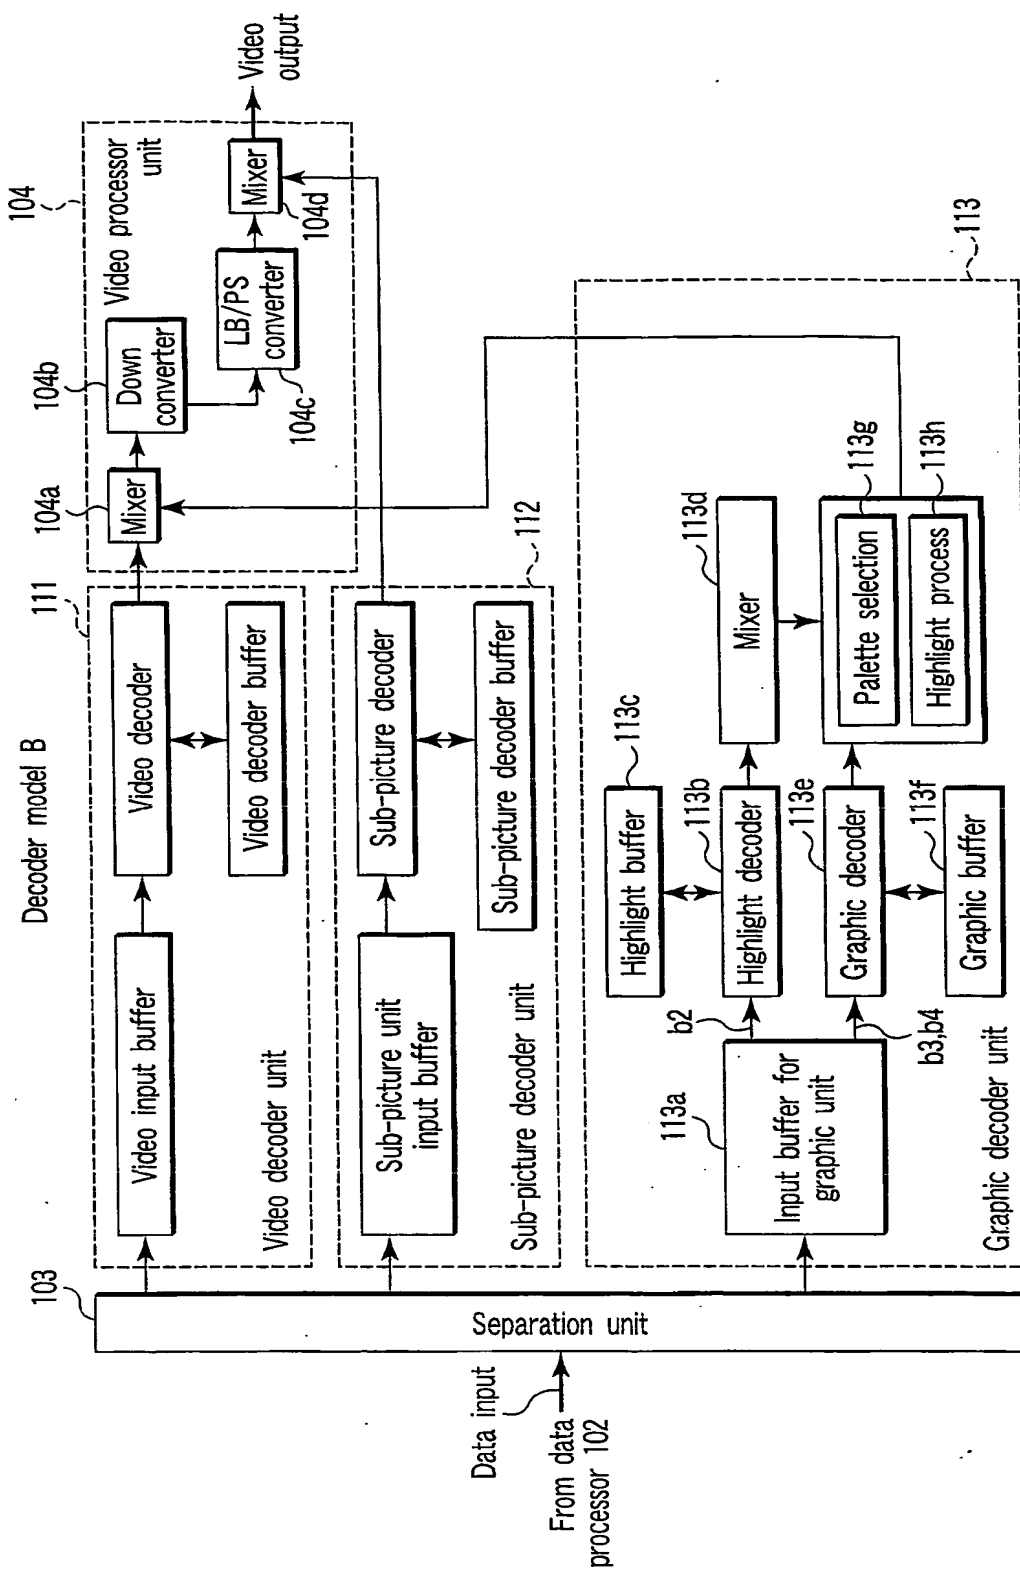


FIG. 50

50/54

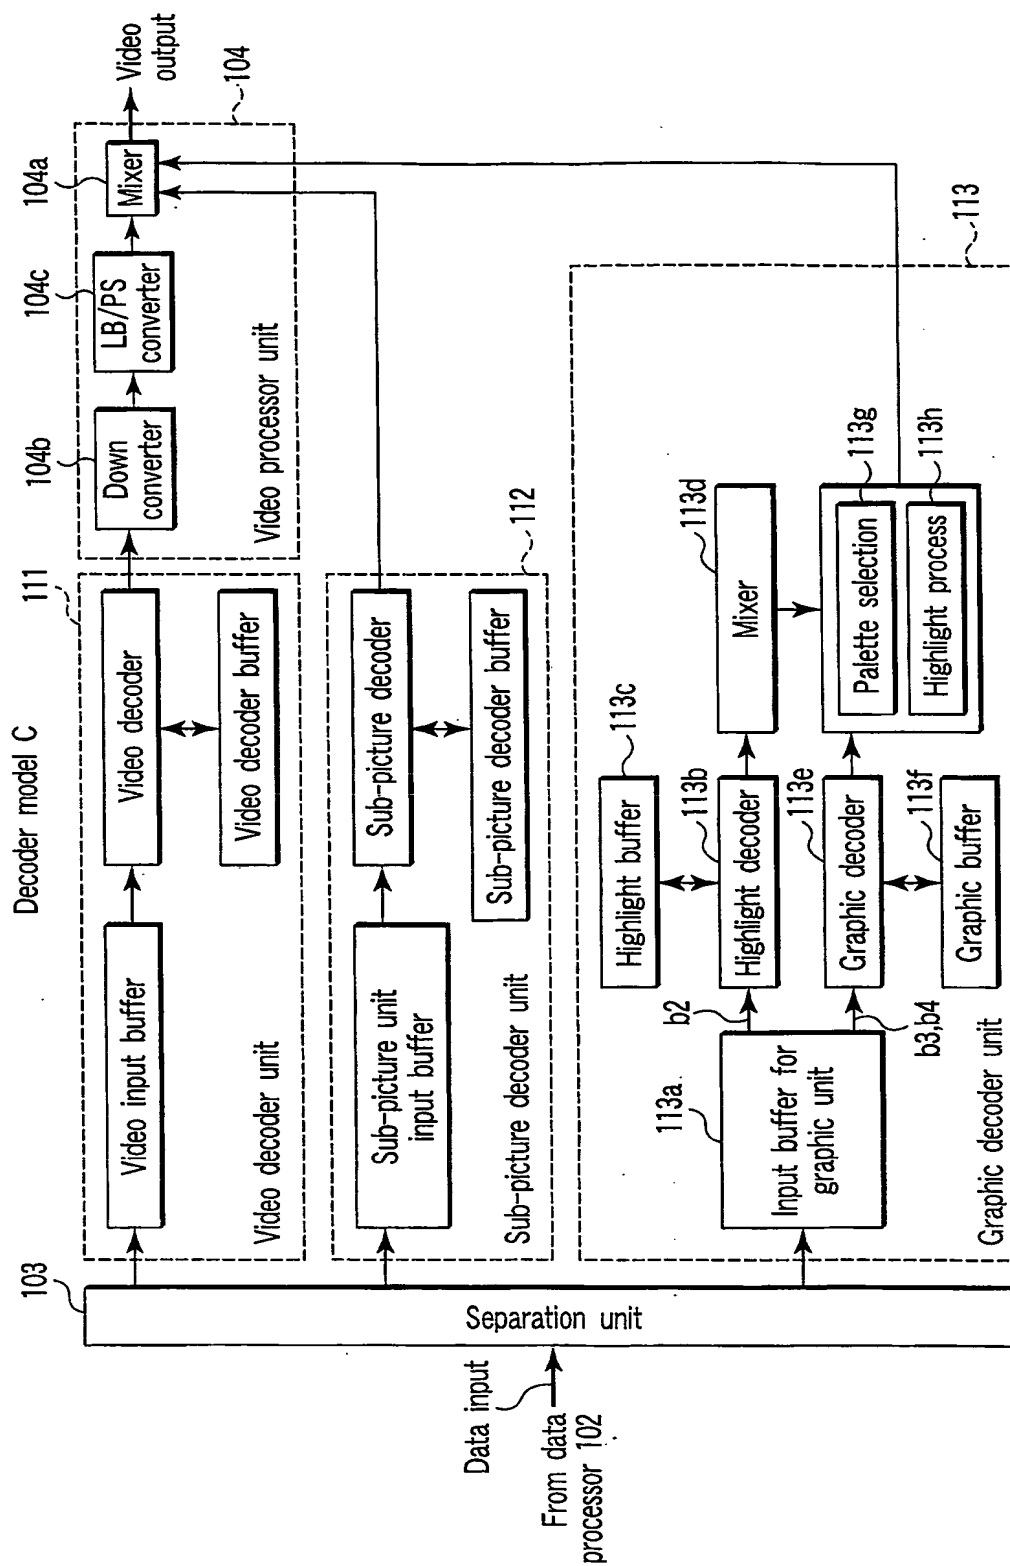


FIG. 51


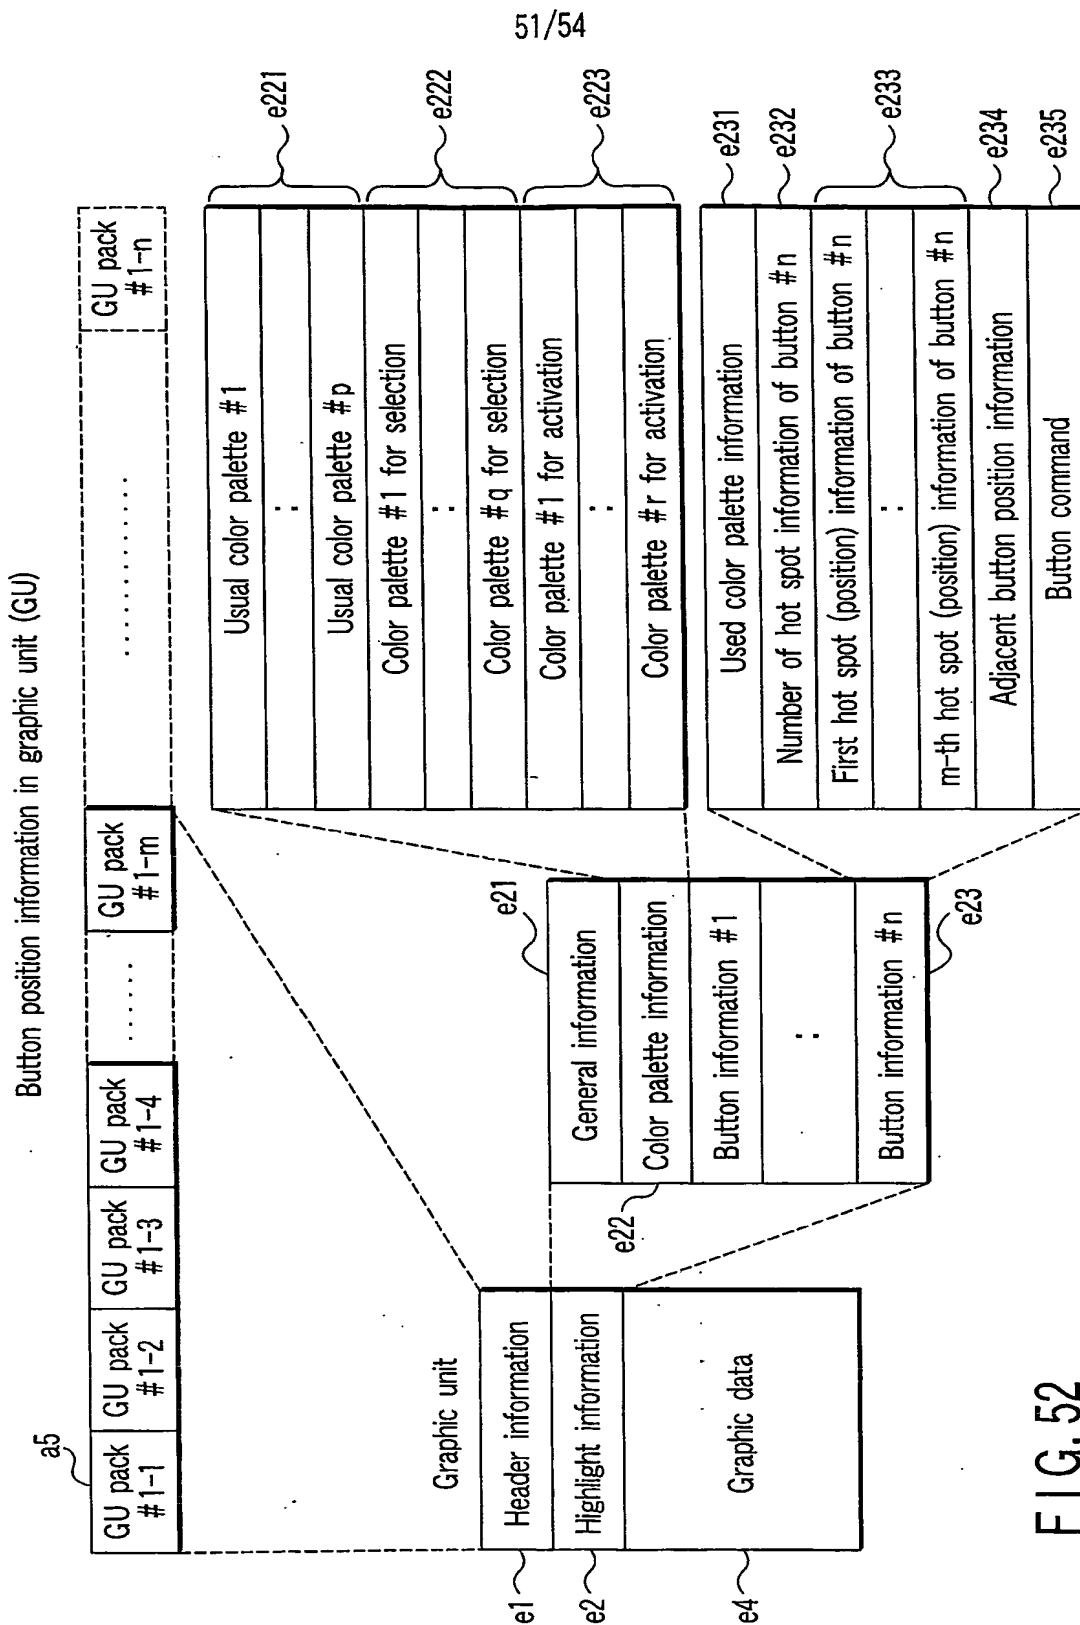


FIG. 52

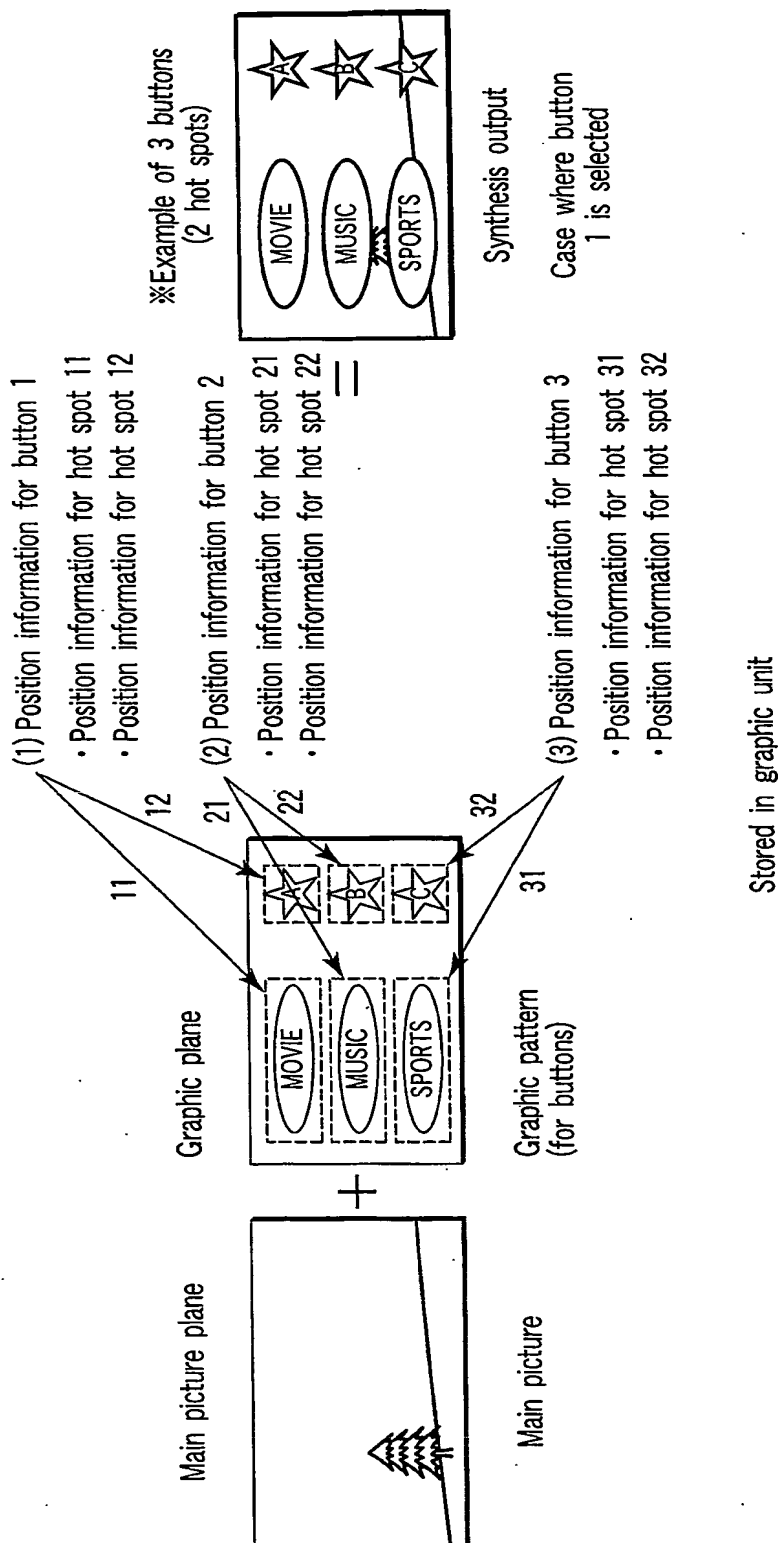

### Example of video synthesis including button position information



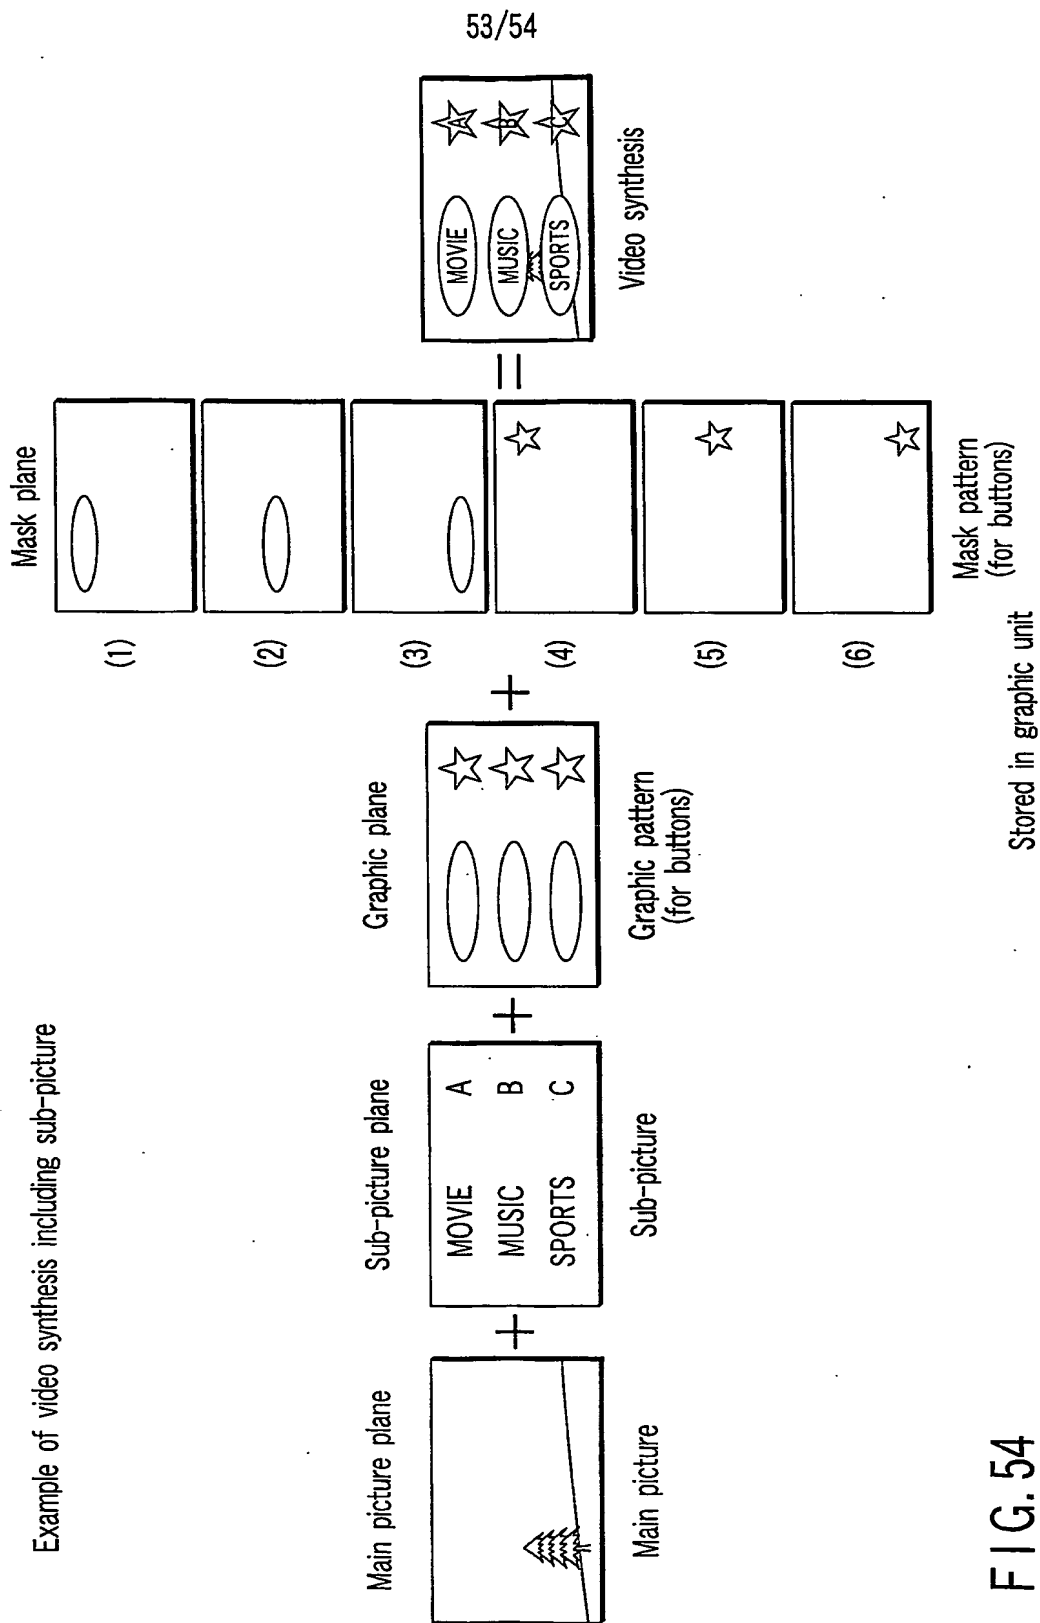


FIG. 54

54/54

Video synthesis flow

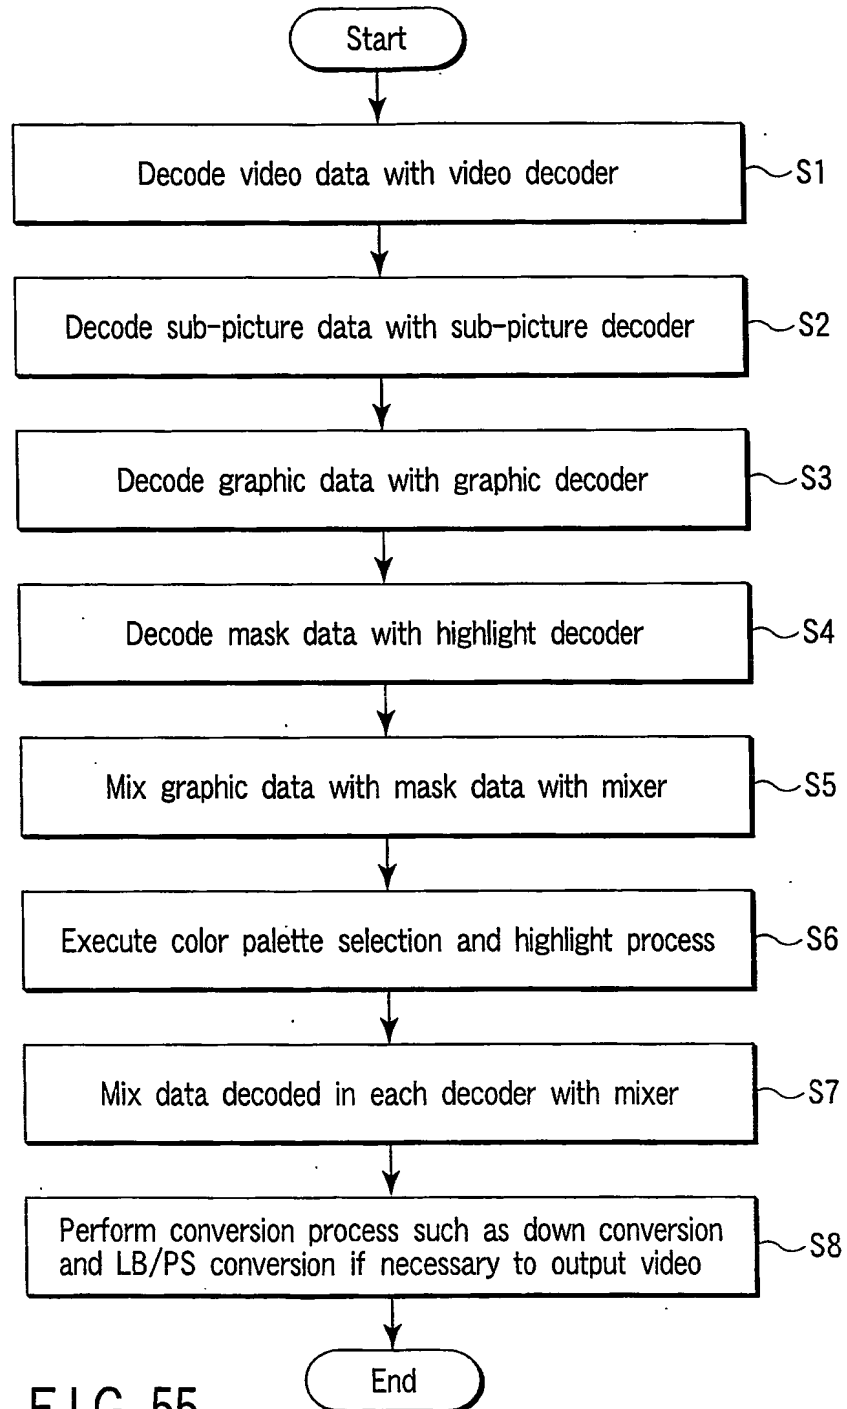


FIG. 55


## DECLARATION OF NON-ESTABLISHMENT OF INTERNATIONAL SEARCH REPORT

(PCT Article 17(2)(a), Rules 13ter.1(c) and Rule 39)

Applicant's or agent's file reference 04S0195P	IMPORTANT DECLARATION	Date of mailing(day/month/year) 30/09/2004
International application No. PCT/JP2004/006794	International filing date(day/month/year) 13/05/2004	(Earliest) Priority date(day/month/year) 13/05/2003
International Patent Classification (IPC) or both national classification and IPC G11B27/30, G11B27/10, G11B27/034		
Applicant KABUSHIKI KAISHA TOSHIBA		

This International Searching Authority hereby declares, according to Article 17(2)(a), that no international search report will be established on the international application for the reasons indicated below

1. ☐ The subject matter of the international application relates to:
- a. ☐ scientific theories.
  - b. ☐ mathematical theories
  - c. ☐ plant varieties.
  - d. ☐ animal varieties.
  - e. ☐ essentially biological processes for the production of plants and animals, other than microbiological processes and the products of such processes.
  - f. ☐ schemes, rules or methods of doing business.
  - g. ☐ schemes, rules or methods of performing purely mental acts.
  - h. ☐ schemes, rules or methods of playing games.
  - i. ☐ methods for treatment of the human body by surgery or therapy.
  - j. ☐ methods for treatment of the animal body by surgery or therapy.
  - k. ☐ diagnostic methods practised on the human or animal body.
  - l. ☐ mere presentations of information.
  - m. ☐ computer programs for which this International Searching Authority is not equipped to search prior art.
2. ☒ The failure of the following parts of the international application to comply with prescribed requirements prevents a meaningful search from being carried out:
- ☒ the description      ☐ the claims      ☐ the drawings
3. ☐ The failure of the nucleotide and/or amino acid sequence listing to comply with the standard provided for in Annex C of the Administrative Instructions prevents a meaningful search from being carried out:
- ☐ the written form has not been furnished or does not comply with the standard.
- ☐ the computer readable form has not been furnished or does not comply with the standard.
4. ☐ The failure of the tables related to the nucleotide and/or amino acid sequence listing to comply with the technical requirements provided for in Annex C-bis of the Administrative Instructions prevents a meaningful search from being carried out:
- ☐ the written form has not been furnished.
- ☐ the computer readable form has not been furnished or does not comply with the technical requirements.
5. Further comments:      SEE ADDITIONAL SHEET

Name and mailing address of the International Searching Authority  European Patent Office, P.B. 5818 Patentlaan 2 NL-2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Authorized officer Patricia Klingens-Herklots
--	--

## FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 203

The description of the application cites the "standards of the current DVD", as well as "DVD video standards" as being very relevant prior art (about 15 times cited and commented in the introductory portion pages 1-13 of the description). The application is in fact about an "improvement of the standards" (see page 2), and the disclosure of the invention is even "based on format standards capable of enhancing an appeal of a DVD video of the user".

The DVD standard is sold under a Non Disclosure agreement (see <http://www.fllcdvd.co.jp/>) and cannot be cited by the Examiner in a Search Report.

Moreover, the only embodiment in the description is not sufficiently disclosed, Art 5 PCT, because the description has to be supplemented with the DVD format documents in order to be carried out by a person skilled in the art, and this DVD format is not available to the public since it is sold under a NDA.

The applicant's attention is drawn to the fact that claims relating to inventions in respect of which no international search report has been established need not be the subject of an international preliminary examination (Rule 66.1(e) PCT). The applicant is advised that the EPO policy when acting as an International Preliminary Examining Authority is normally not to carry out a preliminary examination on matter which has not been searched. This is the case irrespective of whether or not the claims are amended following receipt of the search report or during any Chapter II procedure. If the application proceeds into the regional phase before the EPO, the applicant is reminded that a search may be carried out during examination before the EPO (see EPO Guideline C-VI, 8.5), should the problems which led to the Article 17(2) declaration be overcome.